



# access Lighting

**access**  
LIGHTING

WHERE EXCLUSIVITY MEETS AFFORDABILITY

**access**  
LIGHTING

---

WHERE EXCLUSIVITY MEETS AFFORDABILITY

Catalog 26

Catalog  
26

Access Lighting is family owned and operated by individuals who have a genuine desire to provide “good old-fashioned” customer service fueled by honesty and integrity. This approach to business can be found in each and every associate, all of whom work tirelessly to make every interaction with Access Lighting a pleasurable experience.

Contemporary lighting that is exclusive and affordable; these are the fundamental concepts that define Access Lighting. Combine these ingredients with a desire to provide phenomenal service and timely shipping, and you have a clear understanding for the drive behind Access Lighting and the reason that we have blossomed into your source for contemporary lighting.

Access Lighting is focused on catering to you, our valued customer, to whom we are grateful for our continued success. It is with you, the customer, in mind that we make our product choices, working with designers far and wide across the globe to design and develop our exclusive range of lighting fixtures. We make every attempt to obtain product that offers great options for a variety of applications, and we are often inspired by the requests and ideas of our customers. We choose lighting that is extraordinary, affordable and cutting edge. Our energy efficient program includes a comprehensive collection of fluorescent fixtures, custom built to meet your needs. In addition, we have always felt that is vital, as a company, to stay abreast of the latest technology and this is evident in our ever growing collection of contemporary LED fixtures.

It is with great pleasure that we present to you, our latest catalog, “# 26”. We are truly proud of this catalog. We see it as representation of the phenomenal growth that our company has experienced in terms of our understanding and appreciation for contemporary lighting, and the current trends. We hope that you will find this catalog a useful tool, and that it will assist you in making your job even more pleasurable.

Sincerely,

A handwritten signature in black ink, reading "H. Rosenblatt". The signature is written in a cursive style with a large initial "H".

starting on page	<b>03</b>	Families
starting on page	<b>39</b>	Spotlights
starting on page	<b>49</b>	Ceiling
	50	Chandeliers
	59	Pendants
	101	Midi Pendants
	117	Mini Pendants
	133	Semi-Flush
	139	Flush-mounts
starting on page	<b>165</b>	Wall
	166	Sconces and Fixtures
	187	Vanities
starting on page	<b>221</b>	Outdoor
starting on page	<b>245</b>	Inteiled Led Modules
starting on page	<b>251</b>	Portables
starting on page	<b>254</b>	Pendant Components
starting on page	<b>284</b>	Index

# CUSTOM CAPABILITIES

At Access Lighting we take pride in catering to our customers design requirements. With our UL / ETL approved conversion center we are able to adapt our fixtures to fit your unique lamping needs.

By constantly researching and investing in a wide variety of cutting edge technology, we offer a vast number of distinctive selections.

Countless hours are spent on designing and debating our product range and you will see the results of this throughout our catalog. We understand each client has their own set of requirements and we will make every effort to find what works best for you.

All modifications are completed in our own facility so there are regular progress reports and no delays.

Whether you are looking for dimming fluorescent, emergency backups or the latest in LED technology, Access Lighting will deliver the best solution, on time and within your budget.

Please note if the basic fixture has been certified as a UL fixture and has been customized to the lamping of your choice, the fixture will be tested and relabeled a CETL fixture.

**Iconography** The following icons are used throughout the catalog to assist in labeling identifying characteristics of each fixture



Fixtures bearing these marks are certified by these accredited testing laboratories, assuring the construction and electrical components meet or exceed all safety requirements.



Access Lighting is a proud Energy Star Partner and all Fixtures bearing this mark have been tested and certified as Energy Star compliant.



Fixtures bearing this symbol meet or exceed the requirements of a 4" projection to comply with the American Disability Act.



Fixtures bearing this symbol are coated with a durable process suitable for use in high Saline conditions and installations that incur severe weather conditions.



Fixtures bearing this symbol are part of a family, related product on Pg # as shown in the box.

## To identify the various lamping options available

LED fixtures are highlighted in Yellow

Fluorescent fixtures are highlighted in Blue

## Quick reference Lumen equivalencies LED vs Incandescent

Incandescent	Lumens	LED	Lumens
60w	800	10.8w	1265
100w	1600	13w	1520

Detailed lamp specifications can be found on page 286

# Families




# Milano



A 55532-CH/CHR

B 55533-CH/CHR


**Milano** Italian inspired chromed glass chandeliers supplied with Xenon 48w lamps, lumen output equivalent to a 60w traditional halogen lamp

Finish: CH Glass CHR		Certification Ceiling Dry Location		CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A 55532-CH/CHR	3Lt x 60w	G9 Hgn	G9	2900k	2400Lm	D 25.5" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft	
B 55533-CH/CHR	6Lt x 60w	G9 Hgn	G9	2900k	4800Lm	D 32.5" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft	



C 55534-CH/CHR

**Milano** Italian inspired chromed glass chandeliers supplied with Xenon 48w lamps, lumen output equivalent to a 60w traditional halogen lamp

Finish: CH Glass CHR		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
C 55534-CH/CHR	9Lt x 60w	G9 Hgn	G9	2900k	7200Lm	D 37" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft

# Milano



A 55530-CH/CHR



Chromed Glass shade without illumination



B 55531-CH/CHR

**Milano** Italian inspired chromed glass wall fixtures, fixtures supplied with Xenon 48w lamps

Finish: CH Glass CHR	Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included
A 55530-CH/CHR	1Lt x 60w	G9 Hgn	G9	2900k	800Lm	H 8.75" W 5" Ext 8.5"	D 4.75 H 0.9"	Lamps
B 55531-CH/CHR	2Lt x 60w	G9 Hgn	G9	2900k	1600Lm	H 8.75" W 12" Ext 8.5"	D 4.75 H 0.9"	Lamps






A 51000-CH/CCL



B 51001-CH/CCL

## Kristal Crystal aircraft cable suspended pendants

Finish: CH Glass: CCL		Certification Ceiling Dry Location CETL 					
Model	Description	Wattage	Type	Base	Dimensions	Canopy	Included
A 51000-CH/CCL	Cable Pendant	3Lt x 60w	B-10	E-12	D 15" H 6" oah 16 to 125"	D 6" H 2"	10ft of Cable & Cord
B 51001-CH/CCL	Cable Pendant	6Lt x 60w	B-10	E-12	D 20" H 7" oah 16 to 125"	D 6" H 2"	10ft of Cable & Cord

# Kristal




A 51002-CH/CCL



B 51003-CH/CCL

## Kristal Crystal and opal glass semi-flush

Finish: CH Glass: CCL		Certification Ceiling Dry Location CETL				
Model	Description	Wattage	Type	Base	Dimensions	Canopy
A 51002-CH/CCL	Semi-Flush	3Lt x 60w	B-10	E-12	D 15" H 14"	D 8.25" H 4.2"
B 51003-CH/CCL	Semi-Flush	6Lt x 60w	B-10	E-12	D 20" H 18"	D 10.25" H 5"



A 51007-CH/CCL

B 51008-CH/CCL

## Kristal Crystal chain supported ball pendants

Finish: CH Glass: CCL		Certification Ceiling Damp Location CETL		CETL LISTED					
Model	Description	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A 51007-CH/CCL	Ball Pendant	3Lt x 60w	G9 Hgn	G9	2900k	2400Lm	D 11" H 11" oah 20 to 130"	D 6" H 1.5"	10ft Chain, 10ft of Clear Cord, Lamps
B 51008-CH/CCL	Ball Pendant	5Lt x 60w	G9 Hgn	G9	2900k	4000Lm	D 15" H 15" oah 20 to 135"	D 6" H 1.5"	10ft Chain, 10ft of Clear Cord, Lamps

# Tara






A 50120-BS/OPL



B 50121-BS/OPL

## Tara Flush-mount with clear bent glass and frosted windows

Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A 50120-BS/OPL	3Lt x 60w	A-19	E-26			D 14" H 4.75"	D 10.25" H 0.9"	
C50120BSOPLN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	D 14" H 4.75"	D 10.25" H 0.9"	Lamps
B 50121-BS/OPL	3Lt x 75w	A-19	E-26			D 18" H 4.75"	D 11.75" H 0.9"	
C50121BSOPLN1226BS 	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	D 18" H 4.75"	D 11.75" H 0.9"	Lamps




A 50123-BS/OPL



B 50124-BS/OPL

## Tara Pendants or semi-flush mounts, with clear bent glass and frosted windows

Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A	50123-BS/OPL	3Lt x 75w	A-19	E-26			D 18" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C50123BSOPLN1226B	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	D 18" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	
B	50124-BS/OPL	5Lt x 60w	A-19	E-26			D 24" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C50124BSOPLN1418B	4Lt x 18w	Spiral	GU-24	2700k	5000Lm	D 24" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	

# Nido



D 63962-MC/FST



B 63958-MC/FST




A 63957-MC/FST



C 63959-MC/FST

## Nido Pendants and chandelier with heavy molded frosted glass supported with spring steel clips

Finish: MC ORB Glass FST		Certification Ceiling Dry Location CETL 								
Model	Description	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A 63957-___/FST	Semi-Flush or Pendant	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 32" W 5" oah 22 to 35 or 11"	H 0.9" L 5.5" W 5.5"	Telescopic Rods 6" stem Slope Adapter, Lamps	
B 63958-___/FST	Semi-Flush or Pendant	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 42.5" W 5" oah 22 to 35 or 11"	H 0.9" L 5.5" W 5.5"		
C 63959-___/FST	Semi-Flush or Pendant	5Lt x 100w	J-78	R7s	2900k	8250Lm	L 53.5" W 5" oah 22 to 35 or 11"	H 0.9" L 5.5" W 5.5"		
D 63962-___/FST	Adjustable Chandelier	6Lt x 100w	J-78	R7s	2900k	9900Lm	L 29.25" W 16" oah 22 to 35 or 11"	H 1" L 5.5" W 5.5"		



**B** 63953-MC/FST



**A** 63951-MC/FST




**C** 63960-ORB/FST



**D** 63961-ORB/FST

## Nido Certified for wall / vanity and ceiling with heavy molded glass

Finish: MC ORB Glass FST		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included	
<b>A</b> 63951-__/FST	1Lt x 100w	J-78	R7s	2900k	1650Lm	L 10" W 6" Ext 3.5"	D 5.2" H 0.9"	Lamps	
<b>B</b> 63953-__/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 14.25" W 14.25" Ext 3.75"	D 9.9" H 0.9"	Lamps	
<b>C</b> 63960-__/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 32" W 3" H 5"	D 4.4" H 0.5" W 4.5" L 7.25"	Lamps	
<b>D</b> 63961-__/FST	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 42" W 3" H 5"	D 4.4" H 0.5" W 4.5" L 7.25"	Lamps	

# Leilah






A 50956-BS/WH



B 50957-BS/WH

## Leilah Scalloped white molded glass flush-mounts

Finish: BS Glass: WH		Certification Ceiling Dry Location CETL							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A 50956-BS/WH	2Lt x 60w	A-19	E-26			D 17.25" H 6.5"	D 7.9" H .75"		
C50956BSWHEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	D 17.25" H 6.5"	D 7.9" H .75"	Lamps	
B 50957-BS/WH	4Lt x 60w	A-19	E-26			D 21.4" H 7.75"	D 9.9" H .75"		
C50957BSWHEN1413BS 	4Lt x 13w	Spiral	GU-24	2700k	3600Lm	D 21.4" H 7.75"	D 9.9" H .75"	Lamps	








**A** 50958-BS/WHT

**B** 50959-BS/WHT



**C** 50963-BS/WHT

## Leilah Scalloped white molded glass pendants

Finish: BS Glass: WH		Certification Ceiling Dry Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
<b>A</b> 50958-BS/WH	2Lt x 60w	A-19	E-26			<b>D</b> 17.25" <b>H</b> 6.5" <b>oah</b> 12 to 120"	<b>D</b> 5.5" <b>H</b> 1"	10ft of Cable & Cord
	<b>C50958BSWHEN1218BS</b> 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	<b>D</b> 17.25" <b>H</b> 6.5" <b>oah</b> 12 to 120"	<b>D</b> 5.5" <b>H</b> 1"
<b>B</b> 50959-BS/WH	4Lt x 60w	A-19	E-26			<b>D</b> 21.3" <b>H</b> 7.5" <b>oah</b> 12 to 120"	<b>D</b> 5.5" <b>H</b> 1"	10ft of Cable & Cord
	<b>C50959BSWHEN1413BS</b> 	4Lt x 13w	Spiral	GU-24	2700k	3600Lm	<b>D</b> 21.3" <b>H</b> 7.5" <b>oah</b> 12 to 120"	<b>D</b> 5.5" <b>H</b> 1"
<b>C</b> 50963-BS/WH	1Lt x 40w	G9 Hgn	G9	2900k	480Lm	<b>D</b> 4.25" <b>H</b> 4.75" <b>oah</b> 10 to 120"	<b>D</b> 5" <b>H</b> 1"	10ft of Clear Cord, Lamps

# Aero



B 20671-CH/OPL




A 20670-CH/OPL



C 20672-CH/OPL


## Aero Chromium ring and opal glass flush-mounts

Finish: CH Glass: OPL		Certification Ceiling Damp Location CETL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Canopy	Included
A 20670-CH/OPL	1Lt x 75w	A-19	E-26			D 10" H 4"	D 7.2" H 1"	
C20670CHOPLN1126B	1Lt x 26w	Spiral	GU-24	1710Lm	2700k	D 10" H 4"	D 7.2" H 1"	Lamps
20670LED-CH/OPL	1Lt x 10.8w	LED	Module	1265Lm	3000k	D 10" H 4"	D 7.2" H 1"	Lamps
B 20671-CH/OPL	2Lt x 60w	A-19	E-26			D 12.5" H 4"	D 10.2" H 1"	
C20671CHOPLN1218B	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	D 12.5" H 4"	D 10.2" H 1"	Lamps
20671LED-CH/OPL	1Lt x 13w	LED	Module	1520Lm	3000k	D 12.5" H 4"	D 10.2" H 1"	Lamps
C 20672-CH/OPL	3Lt x 60w	A-19	E-26			D 15.7" H 5.5"	D 11.2" H 1"	
C20672CHOPLN1218B	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	D 15.7" H 5.5"	D 11.2" H 1"	Lamps
20672LEDD-CH/OPL Dimmable	1Lt x 24w	LED	Module	2790Lm	3000k	D 15.7" H 5.5"	D 11.2" H 1"	Lamps



20673-CH/OPL

## Aero Chromium ring and opal glass aircraft cable suspended adjustable pendant

Finish: CH Glass OPL	Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
20673-CH/OPL	3Lt x 60w	A-19	E-26			D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord
C20673CHOPLEN1226B	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
20673LEDD-CH/OPL Dimmable	1Lt x 24w	LED	Module	3000k	2790Lm	D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord, Lamps



**A** 50186-WH/OPL



**B** 50187-WH/OPL




**C** 50188-WH/OPL



**D** 50189-WH/OPL

## Altum Molded opal glass flush-mounts

Finish: WH Glass: OPL		Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
<b>A</b>	<b>50186-WH/OPL</b>	1Lt x 60w	A-19	E-26			<b>D 10.25" H 3.1"</b>	<b>D 7.5" H .5"</b>	
	<b>C50186WHOPLEN1118B</b>	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	<b>D 10.25" H 3.1"</b>	<b>D 7.5" H .5"</b>	Lamps
	<b>50186LED-WH/OPL</b>	1Lt x 10.8w	LED	Module	3000k	1265Lm	<b>D 10.25" H 3.1"</b>	<b>D 7.5" H .5"</b>	Lamps
<b>B</b>	<b>50187-WH/OPL</b>	2Lt x 60w	A-19	E-26			<b>D 12.5" H 3.5"</b>	<b>D 10.1" H .5"</b>	
	<b>C50187WHOPLEN1218B</b>	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	<b>D 12.5" H 3.5"</b>	<b>D 10.1" H .5"</b>	Lamps
	<b>50187LED-WH/OPL</b>	1Lt x 10.8w	LED	Module	3000k	1265Lm	<b>D 12.5" H 3.5"</b>	<b>D 10.1" H .5"</b>	Lamps
<b>C</b>	<b>50188-WH/OPL</b>	3Lt x 60w	A-19	E-26			<b>D 15.75" H 3.75"</b>	<b>D 11.1" H .5"</b>	
	<b>C50188WHOPLEN1218B</b>	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	<b>D 15.75" H 3.75"</b>	<b>D 11.1" H .5"</b>	Lamps
	<b>50188LED-WH/OPL</b>	1Lt x 13w	LED	Module	3000k	1520Lm	<b>D 15.75" H 3.75"</b>	<b>D 11.1" H .5"</b>	Lamps
<b>D</b>	<b>50189-WH/OPL</b>	3Lt x 60w	A-19	E-26			<b>D 19.5" H 4"</b>	<b>D 14.1" H .5"</b>	
	<b>C50189WHOPLEN1313B</b>	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	<b>D 19.5" H 4"</b>	<b>D 14.1" H .5"</b>	Lamps




**B** 50191-WH/OPL



**A** 50190-WH/OPL

## Altum Aircraft cable suspended molded opal glass pendants

Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
<b>50190-BS/OPL</b>	3Lt x 60w	A-19	E-26			<b>D 15.75" H 3.4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord
<b>A C50190BSOPLEN1218B</b>	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	<b>D 15.75" H 3.4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord, Lamps
<b>50190LED-BS/OPL</b>	1Lt x 13w	LED	Module	3000k	1520Lm	<b>D 15.75" H 3.4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord, Lamps
<b>50191-BS/OPL</b>	3Lt x 60w	A-19	E-26			<b>D 19.5" H 4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord
<b>B C50191BSOPLEN1313B</b>	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	<b>D 19.5" H 4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord, Lamps
<b>50191LEDD-BS/OPL Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	<b>D 19.5" H 4" oah 10 to 120"</b>	<b>D 5.8" H 1"</b>	10ft of Cable & Cord, Lamps

# Orion



A 50160-WH/OPL




B 50161-WH/OPL



C 50162-WH/OPL

## Orion Spherical molded opal glass flush-mounts

Finish: WH Glass: OPL		Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A	50160-WH/OPL	2Lt x 60w	A-19	E-26			D 10.75" H 3.75"	D 8.25" H 1"	
	C50160WHOPLE1118BQ	1Lt x 18w	Quad	GU-24	2700k	1250Lm	D 10.75" H 3.75"	D 8.25" H 1"	Lamps
	50160LED-WH/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	D 10.75" H 3.75"	D 8.25" H 1"	Lamps
B	50161-WH/OPL	3Lt x 60w	A-19	E-26			D 13.25" H 4"	D 10" H 1"	
	C50161WHOPLE1218BQ	2Lt x 18w	Quad	GU-24	2700k	2500Lm	D 13.25" H 4"	D 10" H 1"	Lamps
	50161LED-WH/OPL	1Lt x 13w	A-19	E-26	3000k	1520Lm	D 13.25" H 4"	D 10" H 1"	Lamps
C	50162-WH/OPL	3Lt x 60w	A-19	E-26			D 19" H 4.5"	D 11.1" H .5"	
	C50162WHOPLE1218BQ	1Lt x 18w	Quad	GU-24	2700k	1250Lm	D 19" H 4.5"	D 11.1" H .5"	Lamps
	50162LEDD-WH/OPL Dimmable	1Lt x 24w	LED	Module	3000k	2790Lm	D 19" H 4.5"	D 11.1" H .5"	Lamps



50163-BS/OPL

## Orion Spherical molded opal glass aircraft cable supported pendant


Finish: BS Glass: OPL	Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
50163-BS/OPL	3Lt x 60w	A-19	E-26			D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord
C50163BSOPLN1218BQ	2Lt x 18w	Quad	GU-24	2700k	2500Lm	D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
50163LEDD-BS/OPL Dimmable	1Lt x 24w	LED	Module	3000k	2790Lm	D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps

# Aquarius



50107-BS/CLR

## Aquarius Adjustable glass & metal pendant

<b>Finish:</b> BS <b>Glass:</b> CLR		<b>Certification</b> Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
50107-BS/CLR	4Lt x 60w	G9 Hgn	G9	2900k	3200Lm	L 29.5" W 10" oah 9 to 47"	L 4.4" W 8.25" H 0.75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft



# Aquarius



B 50110-BS/CLR






A 50108-BS/CLR



C 62095-BS/FST

## Aquarius Panel glass pendants semi-flush mounts and wall fixture

Finish: BS Glass: CLR		Certification 50108 / 50110 Ceiling Damp Location CETL 					Certification 62095 Wall Dry Location CETL  				
Model	Description	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy/Back-Plate	Included	Options	
A 50108-BS/CLR	Pendant	8Lt x 40w	G9 Hgn	G9	2900k	3840Lm	L 24" W 12" oah 9 to 47"	L 4.4" W 8.25" H 0.75"	Rods 6"16"22", 10ft Cord Slope Adapter	Rods up to 10ft	
	C50108BSCLREH3418Q	Pendant	4Lt x 18w	Quad	G24q-2		L 24" W 12" oah 9 to 47"	L 4.4" W 8.25" H 0.75"			
B 50110-BS/CLR	Pendant	10Lt x 40w	G9 Hgn	G9	2900k	4800Lm	L 30" W 12" oah 9 to 47"	L 4.4" W 8.25" H 0.75"			
	C50110BSCLREH3418Q	Pendant	4Lt x 18w	Quad	G24q-2		L 30" W 12" oah 9 to 47"	L 4.4" W 8.25" H 0.75"			
C 62095-BS/FST	Wall Fixture	1Lt x 100w	J-118	R7s	2900k	1650Lm	L 8" H 15" Ext 3"	L 12.6" W 5.25" H 1"			Lamps
	C62095BSFSTEN1218B	Wall Fixture	2Lt x 18w	Spiral	GU-24	2700k	L 8" H 15" Ext 3"	L 12.6" W 5.25" H 1"			Lamps
	62095LED-BS/FST	Wall Fixture	1Lt x 13w	LED	Module	3000k	L 8" H 15" Ext 3"	L 12.6" W 5.25" H 1"	Lamps		

# Helius





A 50480-BS/CFR



B 50483-BS/CFR

## Helius Clear plate glass with frosted centre

Finish: BS Glass: CFR		Certification 50480 Ceiling Damp Location CETL 					Certification 50483 Wall Dry Location CETL 			
Model	Description	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
A 50480-BS/CFR	Flush-Mount	1Lt x 150w	J-78	R7s	2600Lm	2900k	D 12" H 4"	D 6" H 1.75"	Lamps	
50480LED-BS/CFR Dimmable	Flush-Mount	1Lt x 13w	LED	GX-53	1200Lm	2700k	D 12" H 4"	D 6" H 1.75"	Lamps	
B 50483-BS/CFR	Wall Sconce	1Lt x 100w	J-78	R7s	1650Lm	2900k	L 12" H 4.5" Ext 6.75"	L 9.75" W 4.25" H .75"	Lamps	




**B** 50484-BS/CFR



**A** 50481-BS/CFR

## Helius Ceiling fixtures with clear plate glass with frosted centre

Finish: BS Glass: CFR		Certification Ceiling Dry Location CETL 								
Model	Description	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Canopy	Included	Options
<b>A</b> 50481-BS/CFR	Semi-Flush	1Lt x 150w	J-78	R7s	2600Lm	2900k	D 12" H 8"	D 8.25" H 1"	Lamps	Slope Adapter
<b>B</b> 50484-BS/CFR	Pendant	1Lt x 150w	J-78	R7s	2600Lm	2900k	D 20" oah 10 to 50"	D 8.25" H 1"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft, Slope Adapter

# Iron






A 50130-BS/FST



B 50131-BS/FST

## Iron Heavy frosted glass flush-mounts encased in metal mesh housing

Finish: BS Glass: FST		Certification Ceiling Damp Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A 50130-BS/FST	1Lt x 100w	A-19	E-26			D 12" H 4"	D 9.75" H 1"	
A C50130BSFSTEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	D 12" H 4"	D 9.75" H 1"	Lamps
50130LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	D 12" H 4"	D 9.75" H 1"	Lamps
B 50131-BS/FST	2Lt x 75w	A-19	E-26			D 16" H 4"	D 14" H 1"	
B C50131BSFSTEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	D 16" H 4"	D 14" H 1"	Lamps
50131LED-BS/FST	1Lt x 13w	LED	Module	3000k	1520Lm	D 16" H 4"	D 14" H 1"	Lamps



C 50562-BS/OPL



C 50562-BS/OPL  
Shown with optional extra SCR50562 Mesh Sleeve








B 20739-BS/OPL



A 20738-BS/OPL

## Iron Opal glass ceiling and wall fixtures encased in metal mesh screen

Finish: BS Glass: CLR		Certification 20738 Ceiling Dry Location 20739 Wall Damp Location CUL 						Certification 50562 Wall Damp Location CETL 	
Model	Description	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Included	Options
A	20738-BS/OPL	1Lt x 100w	A-19	E-26			D 6.1" H 12" oah 20-58"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C20738BSOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 6.1" H 12" oah 20-58"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	
B	20739-BS/OPL	2Lt x 60w	A-19	E-26			L 10" H 11.75" Ext 4"		
	C20739BSOPLN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	L 10" H 11.75" Ext 4"	Lamps	
	20739LED-BS/OPL	2Lt x 4w	LED	Module	2800k	644Lm	L 10" H 11.75" Ext 4"	Lamps	
C	50562-BS/OPL	1Lt x 60w	A-19	E-26			L 4.3" H 14.5" Ext 4"	Integrated On/Off Switch	SCR-50562 Steel Mesh Sleeve
	C50562BSOPLN1113BS 	1Lt x 13w	Spiral	GU-24	2700k	900Lm	L 4.3" H 14.5" Ext 4"	Integrated On/Off Switch, Lamps	

# Saturn



A 50091-BS/FST







B 50092-BS/FST



C 50093-BS/FST


## Saturn Concentric metal ring flush-mounts

Finish: BS Glass: FST		Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A 50091-BS/FST	1Lt x 75w	G9 Hgn	G9	2900k	1050Lm	D 9.5" H 4.5"	D 5" H .25"	Lamps	
A C50091BSFSTEN1113BS 	1Lt x 13w	Spiral	GU-24	2700k	900Lm	D 9.5" H 4.5"	D 5" H .25"	Lamps	
50091LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	D 9.5" H 4.5"	D 5" H .25"	Lamps	
B 50092-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	D 14.5" H 5.5"	D 10.25" H .25"	Lamps	
B C50092BSFSTEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	D 14.5" H 5.5"	D 10.25" H .25"	Lamps	
50092LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	D 14.5" H 5.5"	D 10.25" H .25"	Lamps	
C 50093-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	D 19" H 5.5"	D 15" H .25"	Lamps	
C C50093BSFSTEN1313BS 	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	D 19" H 5.5"	D 15" H .25"	Lamps	
50093LEDD-BS/FST Dimmable	1Lt x 24w	LED	Module	3000k	2790Lm	D 19" H 5.5"	D 15" H .25"	Lamps	



50090-BS/FST

## Saturn Concentric metal ring pendant or semi-flush

Finish: BS	Certification Ceiling Dry Location 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
50090-BS/FST	1Lt x 300w	J-118	R7s	2900k	5000Lm	D 19" oah 12 to 50"	D 5.75" H .6"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft Slope Adapters
50090LEDD-BS/FST <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	D 19" oah 12 to 50"	D 5.75" H .6"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft Slope Adapters

# Titanium



A 62311-BS/FST



B 62312-BS/FST





C 62313-BS/FST



D 62314-BS/FST

## Titanium Metal wave vanity fixtures with frosted glass diffusers With floating junction box plates, ideal for non centered junction boxes

Finish: BS Glass: FST	Certification Ceiling Damp Location CETL  							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included
A 62311-BS/FST	1Lt x 100w	J-78	R7s	2900k	1650Lm	L 12" H 2.75" Ext 4"	L 6.4" W 2" H .75"	Lamps
B 62312-BS/FST	2Lt x 100w	J-78	R7s	2900k	3300Lm	L 23.6" H 2.75" Ext 4"	L 13.5" W 2" H .75"	Lamps
C 62313-BS/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 35.5" H 2.75" Ext 4"	L 25.25" W 2" H .75"	Lamps
D 62314-BS/FST	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 47" H 2.75" Ext 4"	L 37" W 2" H .75"	Lamps



# Titanium



**B** 62316-BS/FST




**A** 62315-BS/FST



**C** 62317-BS/FST

## Titanium Metal wave chandelier and pendants with frosted glass diffusers

Finish: BS Glass: FST		Certification Ceiling Dry Location CETL 								
Model	Description	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
<b>A</b> 62315-BS/FST	Semi-Flush or Pendant	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 35.4" W 2.25" oah 11 to 49"	L 13.75" W 4.4" H .75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
<b>B</b> 62316-BS/FST	Semi-Flush or Pendant	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 47.2" W 2.25" oah 11 to 49"			
<b>C</b> 62317-BS/FST	Cable Chandelier	6Lt x 100w	J-78	R7s	2900k	9900Lm	D 28" oah 20 to 120"	D 6" H 1"	10ft of Cable & Cord, Lamps	

# Phoebe




A 50441-BS/8CL



B 50444-BS/8CL


## Phoebe Clear bent glass pendants with frosted diffuser

Finish: BS Glass: 8CL		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
A 50441-BS/8CL	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 13.5" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
50441LED-BS/8CL Dimmable	1Lt x 13w	LED	GX-53	3000k	1200Lm	D 13.5" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
B 50444-BS/8CL	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 19" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
50444LED-BS/8CL Dimmable	1Lt x 13w	LED	GX-53	3000k	1200Lm	D 19" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft




50443-BS/8CL

## Phoebe Pendant bar with floating junction box cover

Finish: BS Glass: 8CL		Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
50443-BS/8CL	3Lt x 100w	J-78	R7s	2900k	4950Lm	D 10" oah 12 to 50"	L 3.58" W 35.5" H 0.8"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
50443LED-BS/8CL <b>Dimmable</b>	3Lt x 12w	LED	GX-53	3000k	3600Lm	D 10" oah 12 to 50"	L 3.58" W 35.5" H 0.8"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft

# Phoebe

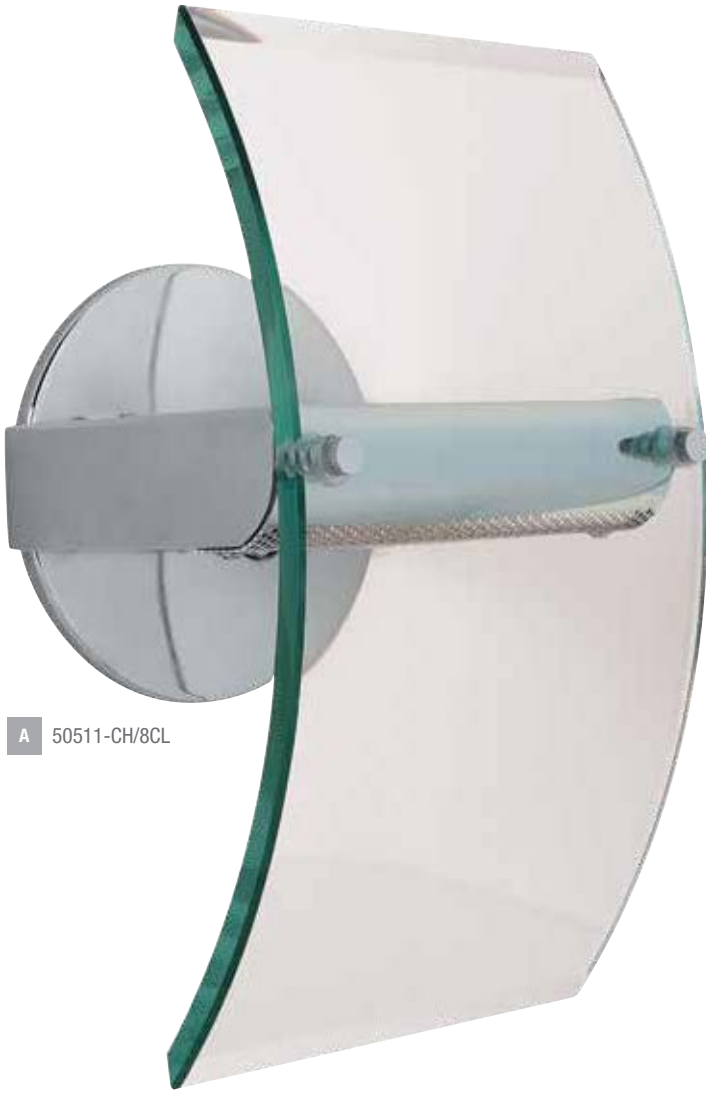

A 50511-CH/8CL




B 50550-CH/8CL

## Phoebe Molded clear glass wall fixtures

Finish: CH Glass: 8CL		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included	
A 50511-CH/8CL	1Lt x 100w	J-78	R7s	2900k	1650Lm	L 6.5" H 12" Ext 6"	D 5" H .2"	Lamps	
B 50550-CH/8CL	2Lt x 40w	G9 Hgn	G9	2900k	960Lm	L 5.5" H 12" Ext 3.25" 	H 1" W 4.75" L 5.6"	Lamps	



A 62091-BS/12C

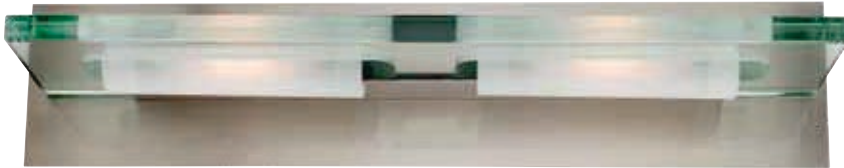

B 62092-BS/12C




C 62093-BS/12C



D 62099-BS/12C

## Phoebe Thick clear panel glass vanities

With full size back-plate ideal for non centered junction boxes

	Finish: BS Glass: 12C	Certification Ceiling Damp Location CETL 							
	Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included
A	62091-BS/12C	1Lt x 100w	J-78	R7s	2900k	1650Lm	L 12.75" H 5" Ext 6.25"	L 12" W 4.4" H .75"	Lamps
B	62092-BS/12C	2Lt x 100w	J-78	R7s	2900k	3300Lm	L 23" H 5" Ext 6.25"	L 22.25" W 4.4" H .75"	Lamps
C	62093-BS/12C	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 33.25" H 5" Ext 6.25"	L 32.25" W 4.4" H .75"	Lamps
D	62099-BS/12C	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 43.5" H 5" Ext 6.25"	L 42.5" W 4.4" H .75"	Lamps



A 20456GU-BS/WHT




B 20457GU-BS/WHT



C 20458GU-BS/WHT

**Aztec Steel ring with white glass flush-mounts**

	Finish: BS Glass: WHT	Certification Ceiling Damp Location CUL 			
	Model	Wattage	Type	Base	Dimensions
A	20456GU-BS/WHT	2Lt x 13w	Spiral	GU-24	D 14" H 4"
B	20457GU-BS/WHT	3Lt x 13w	Spiral	GU-24	D 17" H 4.5"
C	20458GU-BS/WHT	4Lt x 13w	Spiral	GU-24	D 21.5" H 5"




A 20460GU-BS/WHT

C 20463GU-BS/WHT

B 20462GU-BS/WHT

## Aztec Steel ring with white glass pendants and semi-flush

Finish: BS Glass: WHT Certification Ceiling Damp Location CUL 									
	Model	Description	Wattage	Type	Base	Dimensions	Canopy	Included	Options
A	20460GU-BS/WHT	Semi Flush	3Lt x 13w	Spiral	GU-24	D 17" H 17.5"	D 5" H 1"		
	C20460BSWHTEN1140C	Semi Flush	1Lt x 40w	2CT6	G10q	D 17" H 17.5"	D 5" H 1"		
B	C20462BSWHTEN1158C	Chain Pendant	1Lt x 58w	2CT6	G10q	D 21" H 23.5" oah 35.5 to 95.5"	D 5" H .5"	6ft Chain, 10ft Cord	Chain upto 10ft
	20462GU-BS/WHT	Chain Pendant	5Lt x 13w	Spiral	GU-24	D 21" H 23.5" oah 35.5 to 95.5"	D 5" H .5"	6ft Chain, 10ft Cord	Chain upto 10ft
C	20463GU-BS/WHT	Chain Pendant	5Lt x 26w	Spiral	GU-24	D 25" H 25.75" oah 37.75 to 97.75"	D 5" H .5"	6ft Chain, 10ft Cord	Chain upto 10ft
	C20463BSWHTEN1158C	Chain Pendant	1Lt x 58w	2CT6	G10q	D 25" H 25.75" oah 37.75 to 97.75"	D 5" H .5"	6ft Chain, 10ft Cord	Chain upto 10ft



**A** 20452GU-BS/WHT




**B** 20453GU-BS/WHT



**C** 20454GU-BS/WHT

**Aztec Steel ring with white glass vanity fixtures**  
 With full size back-plate ideal for non centered junction boxes



Finish: BS Glass: WHT		Certification Ceiling Damp Location CUL 			
Model	Wattage	Type	Base	Dimensions	Back-Plate
<b>A</b> 20452GU-BS/WHT	2Lt x 13w	Spiral	GU-24	L 24" H 4.5" Ext 6"	L 24" W 4.5" H .9"
<b>B</b> 20453GU-BS/WHT	3Lt x 13w	Spiral	GU-24	L 36" H 4.5" Ext 6"	L 36" W 4.5" H .9"
<b>C</b> 20454GU-BS/WHT	4Lt x 13w	Spiral	GU-24	L 48" H 4.5" Ext 6"	L 48" W 4.5" H .9"



# Spotlights



Arwork by David Sparks

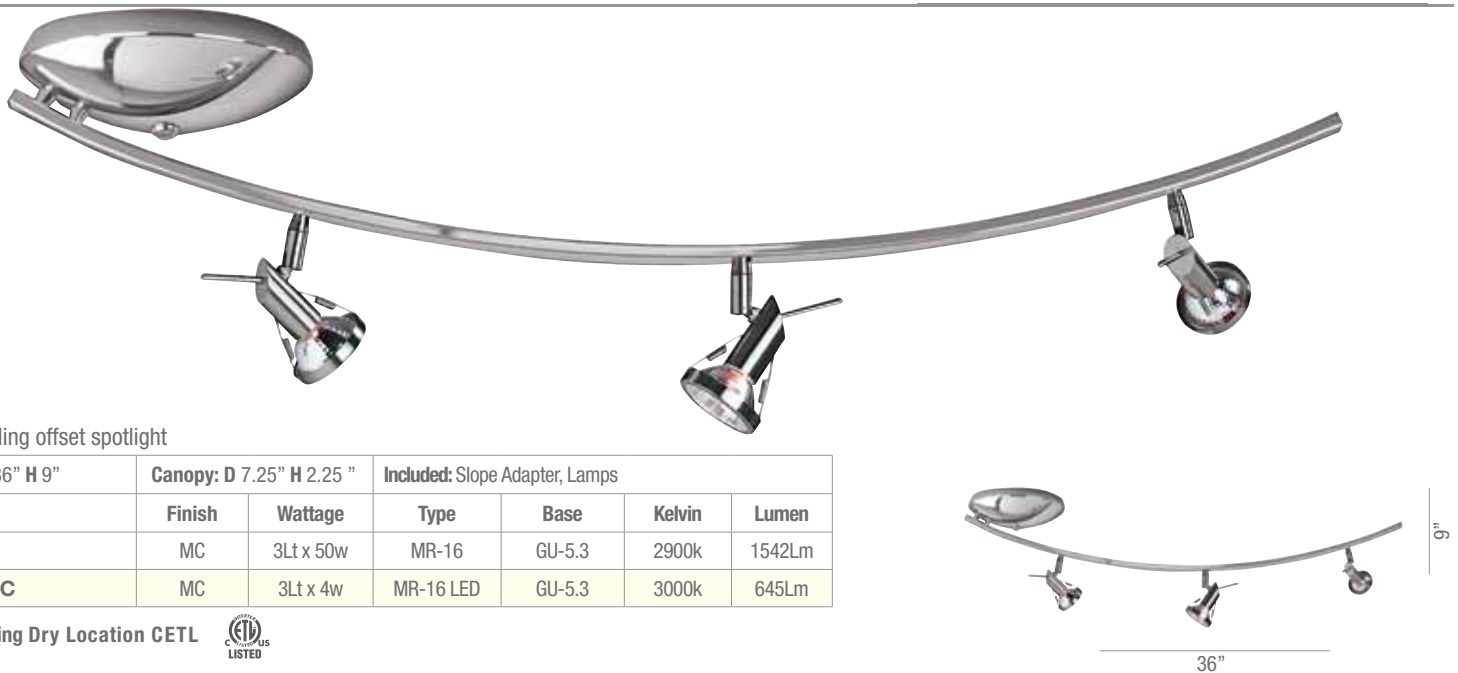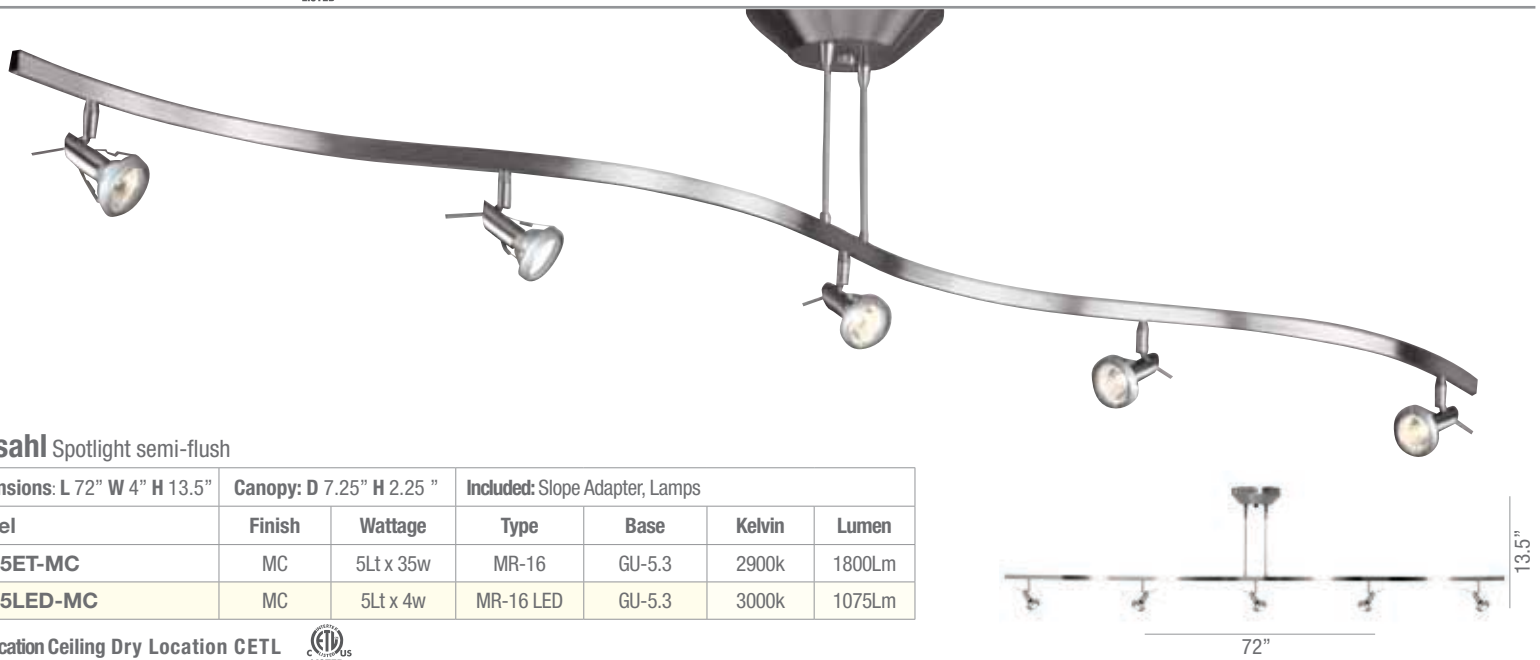



### Versahl Adjustable spotlight pendant

<b>Dimensions:</b> L 27.75" W 4" oah 23 to 39"		<b>Canopy:</b> D 7.25" H 2.25 "		<b>Included:</b> Slope Adapter, Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
63004ET-MC	MC	4Lt x 50w	MR-16	GU-5.3	2900k	2056Lm
63004LED-MC	MC	4Lt x 4w	MR-16 LED	GU-5.3	3000k	860Lm

Certification Ceiling Dry Location CETL



23 to 39"


27.75"



### Versahl Spotlight

<b>Dimensions:</b> W 5" H 14"		<b>Canopy:</b> D 5" H 1"		<b>Included:</b> Slope Adapter, Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
63021-MC	MC	1Lt x 50w	MR-16	GU-5.3	2900k	514Lm
63021LED-MC	MC	1Lt x 4w	MR-16 LED	GU-5.3	3000k	215Lm

Certification Ceiling Dry Location CETL

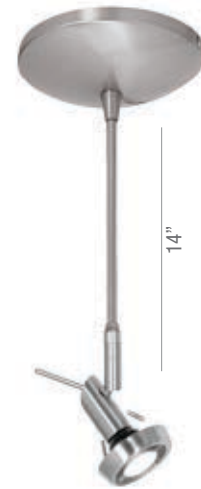

14"

5"



### Versahl Ceiling offset spotlight

<b>Dimensions:</b> L 56" H 11.5"		<b>Canopy:</b> D 7.25" H 2.25 "		<b>Included:</b> Slope Adapter, Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
63024ET-MC	MC	4Lt x 50w	MR-16	GU-5.3	2900k	2056Lm
63024LED-MC	MC	4Lt x 4w	MR-16 LED	GU-5.3	3000k	860Lm

Certification Ceiling Dry Location CETL



11.5"

56"



**Mirage** Semi-flush or pendant

<b>Dimensions:</b> L 33" W 3" oah 14 to 52"		<b>Canopy:</b> D 4.25" H 1 "		<b>Included:</b> Rods 6" 16" 22", Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
52223-__	BRZ BS	3Lt x 50w	MR-16	GU-10	2700k	1320Lm

Certification Ceiling Dry Location CETL



Optional Accessories Rods up to 10ft, Slope Adapters



14 to 52"

33"



**Mirage** Semi-flush with articulating arms

<b>Dimensions:</b> L 24.5 + 24.5" W 3" H 5"		<b>Canopy:</b> D 4.25" H 1 "		<b>Included:</b> Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
52226-__	BRZ BS	6Lt x 50w	MR-16	GU-10	2700k	2640Lm

Certification Ceiling Dry Location CETL



5"

24.5 + 24.5"



**Mirage** Cluster spot

<b>Dimensions:</b> D 10" H 8"		<b>Canopy:</b> D 10" H 1 "		<b>Included:</b> Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
52221-__	BRZ BS	3Lt x 50w	MR-16	GU-10	2700k	1320Lm

Certification Ceiling Dry Location CETL




8"

10"



**Mirage** Semi-flush or pendant

<b>Dimensions:</b> L 40" W 4.7" oah 14 to 52"		<b>Canopy:</b> D 4.25" H 1 "		<b>Included:</b> Rods 6" 16" 22", Lamps		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>
52224-__	BRZ BS	4Lt x 50w	MR-16	GU-10	2700k	1760Lm

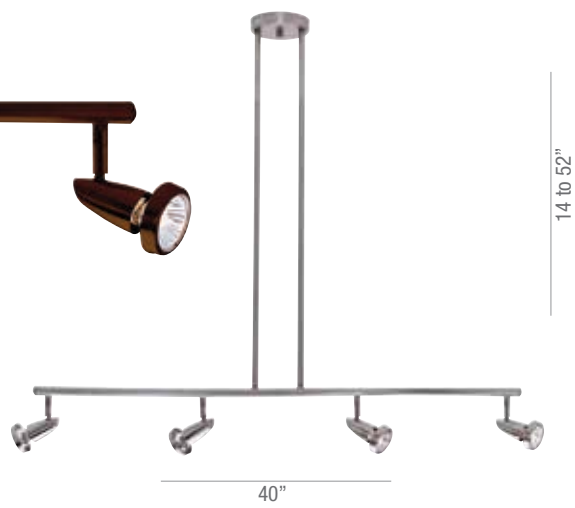

Certification Ceiling Dry Location CETL



Optional Accessories Rods up to 10ft, Slope Adapters



**Mirage** Swivel spot

<b>Dimensions:</b> D 6" H 5.63"		<b>Canopy:</b> D 6" H 1 "		<b>Included:</b> Lamps		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>
52220__	BRZ BS	1Lt x 50w	MR-16	GU-10	2700k	440Lm




Certification Ceiling Dry Location CETL



**Mirage** Inverted G spotlight cluster

<b>Dimensions:</b> D 18" H 6"		<b>Canopy:</b> D 4.25" H 1 "		<b>Included:</b> Lamps		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>
52222-__	BRZ BS	4Lt x 50w	MR-16	GU-10	2700k	1760Lm

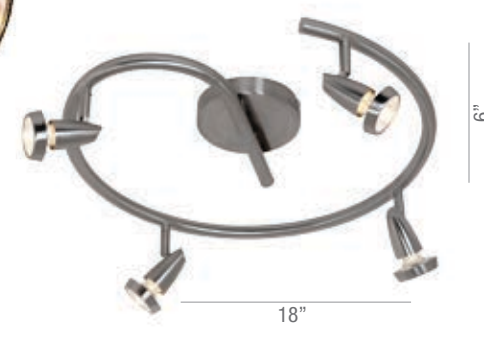

Certification Ceiling Dry Location CETL





10.75" to 49"

**Cobra** Semi-flush or pendant

<b>Dimensions:</b> L 27" oah 10.75 to 49"		<b>Canopy:</b> D 7.5" H 1 "		<b>Included:</b> Rods 6" 16" 22"	
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	
52205-BS	BS	3Lt x 50w	MR-16	GU-10	

Certification Ceiling Dry Location CETL



Optional Accessories Rods up to 10ft, Slope Adapters

27"



5.5"

**Cobra** Wall or ceiling spotlight bar

<b>Dimensions:</b> L 27" H 5.5"		<b>Canopy:</b> D 5" H 1 "		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>
52203-BS	BS	3Lt x 50w	MR-16	GU-10

Certification Ceiling Dry Location CETL



27"



4"

**Cobra** Spotlight cluster

<b>Dimensions:</b> D 10" H 4"		<b>Canopy:</b> D 10" H 1 "		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>
52103-BS	BS	3Lt x 50w	MR-16	GU-10

Certification Ceiling Dry Location CETL



10"



10.75 to 49"

**Cobra** Semi-flush or pendant

<b>Dimensions:</b> L 33" oah 10.75 to 49"		<b>Canopy:</b> D 7.5" H 1 "		<b>Included:</b> Rods 6" 16" 22"	
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	
52206-BS	BS	4Lt x 50w	MR-16	GU-10	

Certification Ceiling Dry Location CETL



Optional Accessories Rods up to 10ft, Slope Adapters

33"



5.5"

**Cobra** Wall or ceiling spotlight bar

<b>Dimensions:</b> L 33" H 5.5"		<b>Canopy:</b> D 5" H 1 "		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>
52204-BS	BS	4Lt x 50w	MR-16	GU-10

Certification Ceiling Dry Location CETL



33"



4.75"

**Cobra** Spotlight cluster

<b>Dimensions:</b> D 12" H 4"		<b>Canopy:</b> D 5" H 1 "		
<b>Model</b>	<b>Finish</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>
52133-BS	BS	3Lt x 50w	MR-16	GU-10

Certification Ceiling Dry Location CETL



12"



**Comet** Adjustable pendant

<b>Dimensions:</b> L 35.5" oah 31 to 51"		<b>Canopy:</b> D 6.5" H 1.1"		<b>Included:</b> Telescopic Rods, Slope Adapters	
Model	Finish	Glass	Wattage	Type	Base
52032-BS/OPL	BS	OPL	4Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL



**Comet** Semi flush

<b>Dimensions:</b> L 21" H 13.2"		<b>Canopy:</b> D 6.5" H 1.1"		<b>Included:</b> Slope Adapters	
Model	Finish	Glass	Wattage	Type	Base
52030-BS/OPL	BS	OPL	3Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL



**Comet** Off-set semi flush

<b>Dimensions:</b> L 35" H 10"		<b>Canopy:</b> D 7.5" H 1.5"			
Model	Finish	Glass	Wattage	Type	Base
52034-BS/OPL	BS	OPL	3Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL







### Comet Adjustable pendant

<b>Dimensions:</b> L 71" oah 31 to 51"		<b>Canopy:</b> D 6.5" H 1.1"		<b>Included:</b> Telescopic Rods, Slope Adapters	
Model	Finish	Glass	Wattage	Type	Base
52033-BS/OPL	BS	OPL	5Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL



### Comet Semi flush

<b>Dimensions:</b> L 71" H 13.2"		<b>Canopy:</b> D 6.5" H 1.1"		<b>Included:</b> Slope Adapters	
Model	Finish	Glass	Wattage	Type	Base
52031-BS/OPL	BS	OPL	5Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL




### Comet Off-set semi flush

<b>Dimensions:</b> L 53.5" H 13.75"		<b>Canopy:</b> D 7.5" H 1.5"			
Model	Finish	Glass	Wattage	Type	Base
52035-BS/OPL	BS	OPL	4Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL



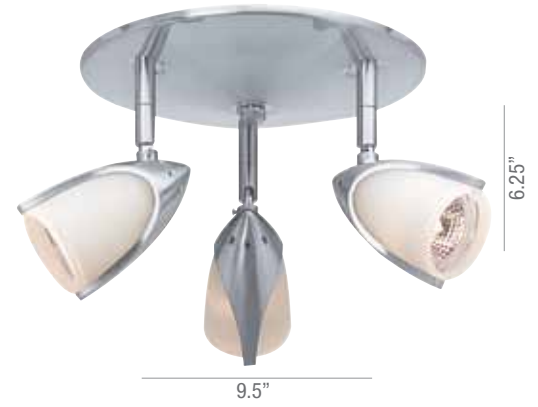

### Comet Cluster tri-pod spotlight


<b>Dimensions:</b> D 9.5" H 6.25"		<b>Canopy:</b> D 8.5" H 1.1"			
Model	Finish	Glass	Wattage	Type	Base
52029-BS/OPL	BS	OPL	3Lt x 35w	MR-16	GU-10

Certification Ceiling Dry Location CETL



### Viper Semi flush with articulating arm

<b>Dimensions:</b> L 35.5 + 16" H 10"		<b>Canopy:</b> L 5.1" W 8" H 1"		<b>Included:</b> Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
52042-BS	BS	5Lt x 35w	MR-16	GU-10	2700k	1300Lm

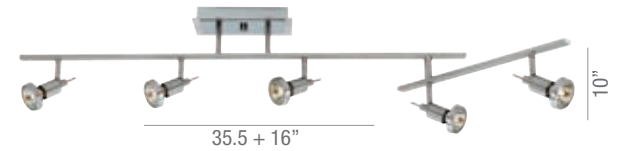


Certification Ceiling Dry Location CETL



### Viper Semi flush with off-set arm

<b>Dimensions:</b> L 31 + 31" H 9"		<b>Canopy:</b> L 6" W 11" H 1"		<b>Included:</b> Lamps		
Model	Finish	Wattage	Type	Base	Kelvin	Lumen
52043-BS	BS	6Lt x 35w	MR-16	GU-10	2700k	1560Lm

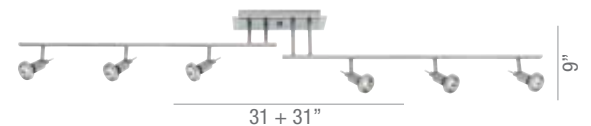

Certification Ceiling Dry Location CETL



# Chandeliers






A 55542-BRZ



B 55543-CH

**Flux** Retro styled oval chandelier, includes replica vintage Edison squirrel cage light bulbs

Finish: CH BRZ	Certification Ceiling Dry Location CETL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
A 55542-___	16Lt x 40w	S-21	E-26	2700k	2160Lm	D 30" oah 37 to 59"	D 4.75 H 0.75"	Rods 6" 16" 22", Slope Adapter, Lamps	Rods up to 10ft
B 55543-___	16Lt x 40w	S-21	E-26	2700k	2160Lm	D 39.5" oah 25 to 53"	D 4.75 H 0.75"	Rods 6" 16" 22", Slope Adapter, Lamps	Rods up to 10ft



62317-BS/FST



**Titanium** Curved steel aircraft cable suspended chandelier with frosted glass diffusers

<b>Finish:</b> BS Glass: FST	<b>Certification</b> Ceiling Dry Location CETL 							
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>
62317-BS/FST	6Lt x 100w	J-78	R7s	2900k	9900Lm	D 28" oah 20 to 120"	D 7" H 1"	10ft of Aircraft Cable & Cord, Lamps



A 50465-BS/FST



B 50466-BS/FST

**Oracle** Chandeliers with frosted glass diffusers a brushed steel ring and supported by aircraft cable  
 Supplied with new eco friendly high lumen output Xenon 48w lamps.

Finish: BS Glass: FST		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A 50465-BS/FST	6Lt x 50w	JCD Hgn	G-9	2900k	3600Lm	D 22" oah 10 to 120"	D 5.5" H 1"	10ft of Aircraft Cable & Cord, Lamps	
B 50466-BS/FST	8Lt x 50w	JCD Hgn	G-9	2900k	4800Lm	D 28" oah 20 to 120"	D 5.5" H 1"	10ft of Aircraft Cable & Cord, Lamps	



**Nitrogen Cable chandelier with fully articulating Rings**

<b>Finish:</b> CH <b>Glass:</b> OPL	<b>Certification</b> Ceiling Dry Location <b>CETL</b> 							
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>
23980-CH/OPL	15Lt x 40w	JCD Hgn	G-9	2900k	7200Lm	D 38" oah 20 to 120"	D 7" H 1"	10ft of Aircraft Cable & Cord, Lamps




70053LED-CH/ACR



Pg 91

**Rain** LED free form chandelier

Finish: CH Diffuser: ACR		Certification Ceiling Dry Location CETL 					
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy
70053LED-CH/ACR	26Lt x 3w	LED	Module	3000k	3120Lm	H 36" L 25.75" W 25.75"	L 23.75" W 23.75" H 1.25"







63962-MC/FST




63962-ORB/FST

29.25" x 16"

22 to 35 or 11"



**Nido** Including two rod combinations for use as an adjustable chandelier or converting to a close-to ceiling fixture

<b>Finish:</b> MC ORB <b>Glass:</b> FST		<b>Certification</b> Ceiling Dry Location <b>CETL</b> 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
63962-___/FST	6Lt x 100w	J-78	R7s	2900k	9900Lm	L 29.25" W 16" oah 22 to 35" or 11"	L 5.5" W 5.5" H 1"	Telescopic Rods, 6" Stems, Slope Adapter, Lamps




A 55532-CH/CHR

B 55533-CH/CHR



**Milano** Italian inspired chromed glass chandeliers included with Xenon 48w lamps, lumen output equivalent to a 60w traditional halogen lamp


Finish: CH Glass CHR		Certification Ceiling Dry Location		CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A 55532-CH/CHR	3Lt x 60w	G9 Hgn	G9	2900k	2400Lm	D 25.5" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft	
B 55533-CH/CHR	6Lt x 60w	G9 Hgn	G9	2900k	4800Lm	D 32.5" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft	



C 55534-CH/CHR




**Milano** Italian inspired chromed glass chandeliers included with Xenon 48w lamps, lumen output equivalent to a 60w traditional halogen lamp

Finish: CH Glass CHR		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
C 55534-CH/CHR	9Lt x 60w	G9 Hgn	G9	2900k	7200Lm	D 37" oah 25 to 63"	D 5" H 1"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft




A 50509-BS/FST

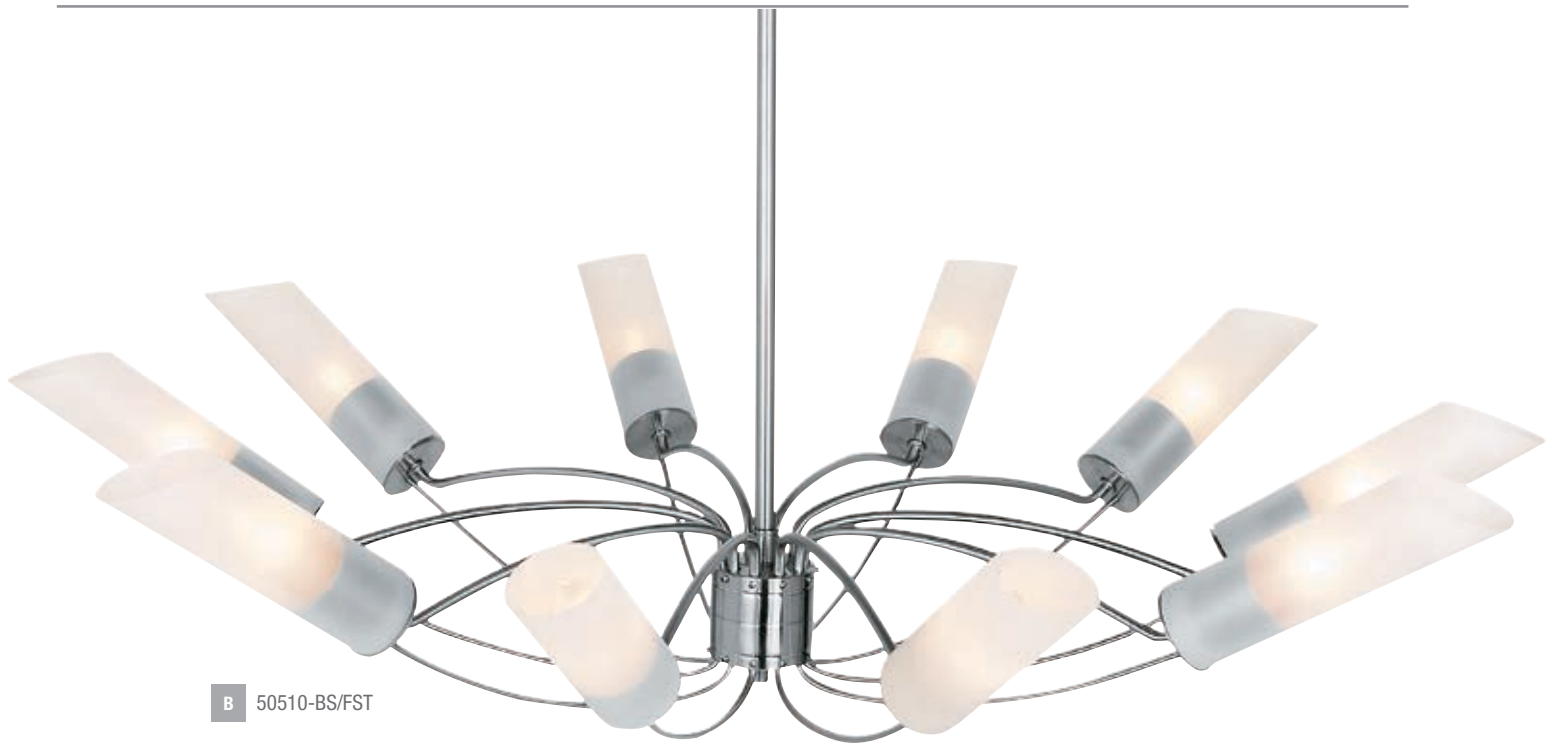

B 50510-BS/FST

### Solar Chandelier with tubular frosted glass

	Finish: BS Glass FST	Certification Ceiling Dry Location CETL 						
	Model	Wattage	Type	Base	Dimensions	Canopy	Included	Options
A	50509-BS/FST	8Lt x 60w	B-10	E-12	D 33" oah 8 to 46"	D 6" H 1"	Rods 6" 16" 22", 10ft Cord	Rods up to 10ft, Slope Adapter
B	50510-BS/FST	10Lt x 60w	B-10	E-12	D 33" oah 8 to 46"	D 6" H 1"	Rods 6" 16" 22", 10ft Cord	Rods up to 10ft, Slope Adapter

# Pendants





A 51000-CH/CCL

B 51001-CH/CCL



A D 15" H 6"



B D 20" H 7"



**Kristal Crystal aircraft cable suspended pendant**

Model	Wattage	Type	Base	Dimensions	Canopy	Included
A 51000-CH/CCL	3Lt x 60w	B-10	E-12	D 15" H 6" oah 16 to 125"	D 6" H 2"	10ft of Cable & Cord
B 51001-CH/CCL	6Lt x 60w	B-10	E-12	D 20" H 7" oah 16 to 125"	D 6" H 2"	10ft of Cable & Cord

Finish: CH Glass CCL Certification Ceiling Dry Location CETL 



A 51007-CH/CCL

B 51008-CH/CCL



A D 11" H 11"

oah 20 to 130"



B D 15" H 15"

oah 20 to 135"



Pg 7

**Kristal chain supported ball pendant**


Finish: CH Glass CCL		Certification Ceiling Damp Location CETL				CETL LISTED			
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A 51007-CH/CCL	3Lt x 60w	G9 Hgn	G9	2900k	2400Lm	D 11" H 11" oah 20 to 130"	D 6" H 1.5"	10ft of Cord & Chain, Lamps	
B 51008-CH/CCL	5Lt x 60w	G9 Hgn	G9	2900k	4000Lm	D 15" H 15" oah 20 to 135"	D 6" H 1.5"	10ft of Cord & Chain, Lamps	



Pg 20



### Orion Spherical molded opal glass aircraft cable suspended pendant


<b>Finish:</b> BS Glass OPL	<b>Certification</b> Ceiling Damp Location <b>CETL</b> 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
50163-BS/OPL	3Lt x 60w	A-19	E-26			D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord
C50163BSOPLN1218BQ	2Lt x 18w	Quad	GU-24	2700k	2500Lm	D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
50163LEDD-BS/OPL	1Lt x 24w	LED	Module	3000k	2790Lm	D 19" H 3.9" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps



Pg 17



### Aero Chromium Ring and opal glass aircraft cable suspended adjustable pendant

<b>Finish:</b> CH Glass OPL	<b>Certification</b> Ceiling Damp Location <b>CETL</b> 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
20673-CH/OPL	3Lt x 60w	A-19	E-26			D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord
C20673CHOPLEN1226B	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
20673LEDD-CH/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	D 15.7" H 5.5" oah 10 to 130"	D 5.8" H 1"	10ft of Cable & Cord, Lamps





**A** D 15.75" H 3.4"

oah 10 to 120"




**B** D 19.5" H 4"

oah 10 to 120"

- A** 50190-BS/OPL
- B** 50191-BS/OPL



**Altum Aircraft cable suspended molded opal glass pendants**

Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
<b>A</b> 50190-BS/OPL	3Lt x 60w	A-19	E-26			D 15.75" H 3.4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord
<b>A</b> C50190BSOPLN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	D 15.75" H 3.4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
50190LED-BS/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	D 15.75" H 3.4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
<b>B</b> 50191-BS/OPL	3Lt x 60w	A-19	E-26			D 19.5" H 4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord
<b>B</b> C50191BSOPLN1313B	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	D 19.5" H 4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps
50191LEDD-BS/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	D 19.5" H 4" oah 10 to 120"	D 5.8" H 1"	10ft of Cable & Cord, Lamps



A 50180-BS/OPL

B 50181-BS/OPL



A D 15" H 11.8"


oah 24 to 120"



B D 18" H 12.8"

oah 27 to 123"

### Callisto Ribbed opal glass pendant


Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A	50180-BS/OPL	2Lt x 60w	A-19	E-26			D 15" H 11.8" oah 24 to 120"	D 5.25" H 0.75"	10ft of Cable & Cord
	C50180BSOPLN1213B	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	D 15" H 11.8" oah 24 to 120"	D 5.25" H 0.75"	10ft of Cable & Cord, Lamps
B	50181-BS/OPL	3Lt x 60w	A-19	E-26			D 18" H 12.8" oah 27 to 123"	D 5.25" H 0.75"	10ft of Cable & Cord
	C50181BSOPLN1313B	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	D 18" H 12.8" oah 27 to 123"	D 5.25" H 0.75"	10ft of Cable & Cord, Lamps



50170-BS/OPL

50170-BS/BL


### Aire Silk glass pendant

Finish BS Glass BL OPL		Certification Ceiling Dry Location <b>CETL</b> 			
Dimensions D 11.9" H 7" oah 14 to 134"		Canopy: D 5.1" H 0.9"			
Included 10ft of Clear Cord (fluorescent fixture includes Lamps)					
Model	Wattage	Type	Base	Kelvin	Lumen
50170-BS/___	1Lt x 100w	A-19	E-26		
C50170BS__EN1118B	1Lt x 18w	Quad	GU-24	2700k	1250Lm



52045-BS/OPL

### Nitrogen Pendant

Finish BS Glass OPL		Certification Ceiling Dry Location <b>CUL</b> 			
Dimensions D 16" H 12.5" oah 20.5 to 58.5"		Canopy: D 5.25" H 1.25"			
Included Rods 6"16"22", 10ft Cord, Slope Adapter, (fluorescent fixture includes Lamps) <b>Optional</b> 10ft rods					
Model	Wattage	Type	Base	Kelvin	Lumen
52045-BS/OPL	1Lt x 100w	A-19	E-26		
C52045BSOPLN1118B	1Lt x 18w	Quad	GU-24	2700k	1250Lm



Convex position



Concave position

Pg 137



**Argon Pendant, frosted glass shade mountable in a concave or convex position**

<b>Finish:</b> BS Glass FST	<b>Certification</b> Ceiling Dry Location CETL								
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>	<b>Options</b>
50454-BS/FST	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 21" oah 11 to 49"	D 9" H 1.75"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft



Pg 24



**Helius Pendant, clear plate glass with frosted centre**


<b>Finish:</b> BS Glass CFR	<b>Certification</b> Ceiling Dry Location CETL								
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>	<b>Options</b>
50484-BS/CFR	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 20" oah 10 to 50"	D 8.25" H 1"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft



50129-SAT/OPL



**Nebula** Opal glass ring pendant, suspended by aircraft cable

<b>Finish:</b> SAT Glass OPL	<b>Certification</b> Ceiling Dry Location <b>CETL</b> 							
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>
50129-SAT/OPL	14Lt x 40w	G9 Hgn	G9	2900k	6720Lm	D 24" oah 12 to 120"	D 5.25" H 1.6"	<b>Included</b> 10ft of Cable & Cord, Lamps



B 50124-BS/OPL



A D 18" H 4.75"




B D 24" H 4.75"

Pg 11




### Tara Pendants with clear bent glass and frosted windows

Finish: BS Glass: OPL		Certification Ceiling Damp Location CETL				CETL LISTED				
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A	50123-BS/OPL	3Lt x 75w	A-19	E-26		D 18" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord	Rods up to 10ft	
	C50123BSOPLN1226B	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	D 18" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft
B	50124-BS/OPL	5Lt x 60w	A-19	E-26		D 24" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord	Rods up to 10ft	
	C50124BSOPLN1418B	4Lt x 18w	Quad	G24q-2	2700k	5000Lm	D 24" H 4.75" oah 12.75 to 50.75"	D 5.25" H 0.75"	Rods 6"16"22", 10ft Cord, Lamps	Rods up to 10ft

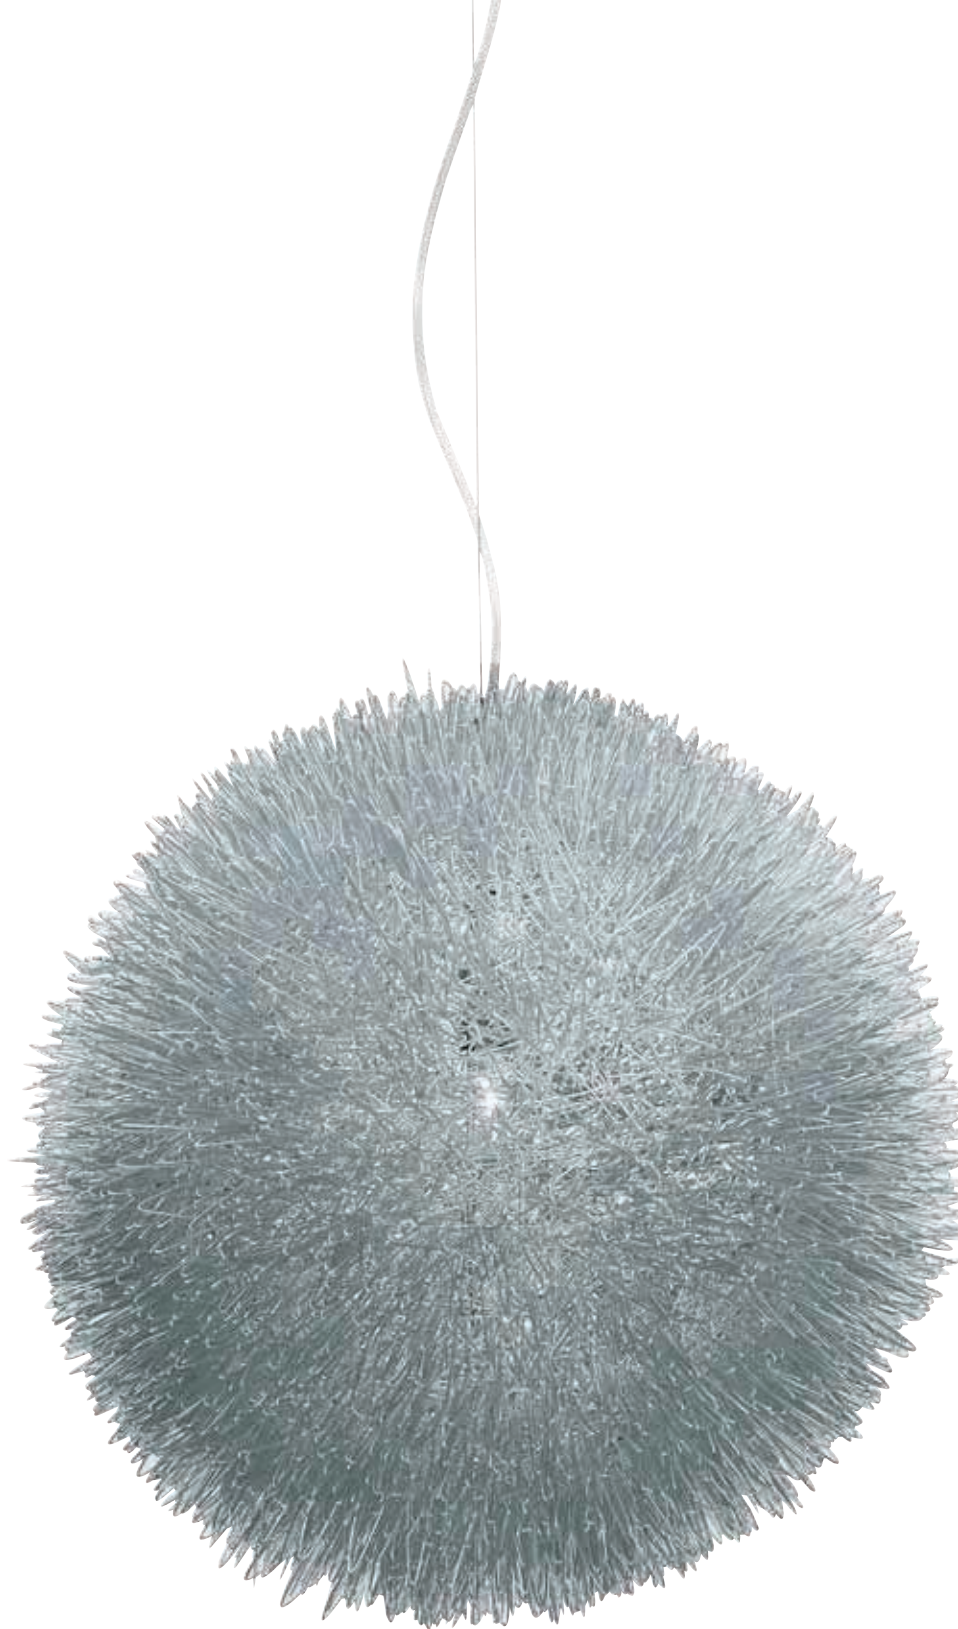


23633-BS

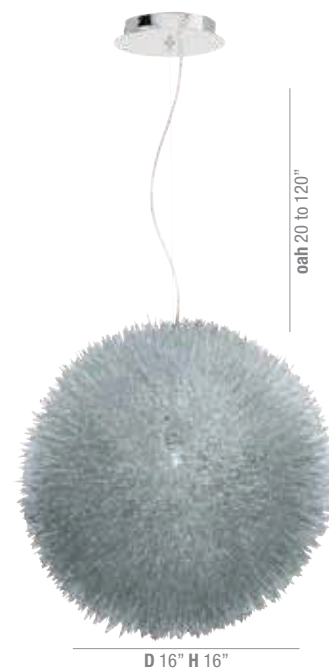

oah 20 to 120"

D 16" H 16"

### Metalica Cable pendant

Finish: BS	Certification Ceiling Dry Location CETL							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
23633-BS	1Lt x 75w	G9 Hgn	G9	2900k	1050Lm	D 16" H 16" oah 20 to 120"	D 5.25" H 1.25"	10ft of Cable & Cord, Lamp



31017-CH/FST



**Thesis** Fluorescent pendant with clear frosted bent glass panel

<b>Finish:</b> CH <b>Glass:</b> FST	<b>Certification</b> Ceiling Dry Location <b>CETL</b> 								
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>	<b>Options</b>
31017-CH/FST	2Lt x 39w	T-5 HO	Bi-Pin	3000k	6200Lm	L 45.5" W 12" oah 12 to 50"	H 1" L 4.4" W 7.25"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft






31012-BS/OPL



L 35.5" x W 4"


**Indium** Fluorescent Pendant encased in a slim and sleek metal body

<b>Finish:</b> BS Glass: OPL	<b>Certification</b> Ceiling Dry Location CETL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
31012-BS/OPL	1Lt x 39w	T-5 HO	Bi-Pin	3000k	3100Lm	L 35.5" W 4" oah 12 to 50"	H 1" L 4.4" W 7.25"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft



A 50108-BS/CLR

B 50110-BS/CLR

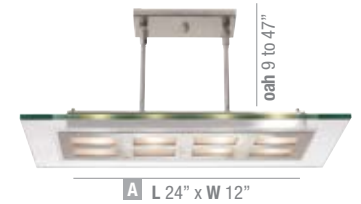

A L 24" x W 12"



B L 30" x W 12"

Pg 22




### Aquarius Adjustable glass & metal pendant


Finish: BS Glass: CLR	Certification Ceiling Damp Location CETL					CETL LISTED				
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A 50108-BS/CLR	8Lt x 40w	G9 Hgn	G9	2900k	3840Lm	L 24" W 12" oah 9 to 47"	L 4.4" W 8.25" H .75"	Rods 6"16"22" 10ft Cord Slope Adapter, Lamps	Rods up to 10ft	
	C50108BSCLREH3418Q	4Lt x 18w	Quad	G24q-2		L 24" W 12" oah 9 to 47"	L 4.4" W 8.25" H .75"	Rods 6"16"22" 10ft Cord Slope Adapter	Rods up to 10ft	
B 50110-BS/CLR	10Lt x 40w	G9 Hgn	G9	2900k	4800Lm	L 30" W 12" oah 9 to 47"	L 4.4" W 8.25" H .75"	Rods 6"16"22" 10ft Cord Slope Adapter, Lamps	Rods up to 10ft	
	C50110BSCLREH3418Q	4Lt x 18w	Quad	G24q-2		L 30" W 12" oah 9 to 47"	L 4.4" W 8.25" H .75"	Rods 6"16"22" 10ft Cord Slope Adapter	Rods up to 10ft	



C 50107-BS/CLR

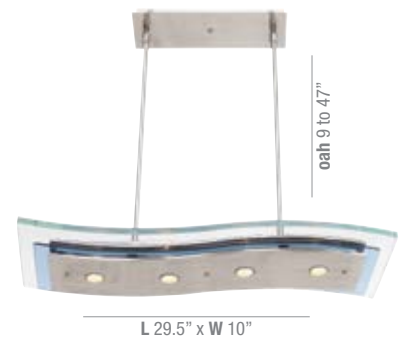

**Aquarius Adjustable glass & metal pendant**

Finish: BS Glass CLR		Certification Ceiling Damp Location CETL							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
C 50107-BS/CLR	4Lt x 60w	G9 Hgn	G9	2900k	3200Lm	L 29.5" W 10" oah 9 to 47"	L 4.4" W 8.25" H 0.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft



**B** 50444-BS/8CL



**A** D 13.5"




**B** D 19"

Pg 32



**Phoebe Clear bent glass pendants with frosted diffuser**


Finish: BS Glass: 8CL		Certification Ceiling Dry Location CETL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
<b>A</b>	50441-BS/8CL	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 13.5" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
	50441LED-BS/8CL <b>Dimmable</b>	1Lt x 13w	LED	GX-53	3000k	1200Lm	D 13.5" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
<b>B</b>	50444-BS/8CL	1Lt x 150w	J-78	R7s	2900k	2600Lm	D 19" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
	50444LED-BS/8CL <b>Dimmable</b>	1Lt x 13w	LED	GX-53	3000k	1200Lm	D 19" oah 12 to 50"	D 5.25" H 1.75"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft



L 35.5" x W 3.58" Glass D 10"



**Phoebe Pendant bar with floating junction box cover**

<b>Finish:</b> BS <b>Glass:</b> 8CL	<b>Certification</b> Ceiling Damp Location <b>CETL</b> 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
<b>50443-BS/8CL</b>	3Lt x 100w	J-78	R7s	2900k	4950Lm	D 10" oah 12 to 50"	L 3.58" W 35.5" H 0.8"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft
<b>50443LED-BS/8CL Dimmable</b>	3Lt x 13w	LED	GX-53	3000k	3600Lm	D 10" oah 12 to 50"	L 3.58" W 35.5" H 0.8"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	Rods up to 10ft



23765-GWH




23765-RIC



23765-BSL



**SoHo** Indirect illumination pendant suspended by aircraft cable

<b>Finish:</b> BSL GWH RIC	<b>Certification</b> Ceiling Dry Location CETL 					
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>
23765-__	3Lt x 60w	A-19	E-26	D 18.75" H 10.5" oah 16.5 to 130.5"	D 6.25" H 0.5"	10ft of Cable & Cord



D 18.75" H 10.5"



23770-RED



23770-BL




23770-WH



D 13.8"

**Magneto** Magnetically coupled infinitely adjustable pendant

<b>Finish:</b> BL RED WH	<b>Certification</b> Ceiling Dry Location <b>CETL</b> 					
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Dimensions</b>	<b>Canopy</b>	<b>Included</b>
23770-__	1Lt x 60w	A-19	E-26	D 13.8" oah 20 to 120"	D 4.75" H 4"	10ft of Cable & Cord




B 62316-BS/FST



Pg 31



**Titanium Metal wave pendant with frosted glass diffusers**

Finish: BS Glass FST		Certification Ceiling Dry Location CETL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A 62315-BS/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 35.4\"/>				
B 62316-BS/FST	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 47.2\"/>				





A 63957-MC/FST



A L 32" x W 5"



B L 42.5" x W 5"




C L 53.5" x W 5"

Pg 12




**Nido** Semi-Flush or Pendant, with heavy molded glass, includes two rod assemblies, adjustable or close to ceiling

Finish: MC ORB Glass FST		Certification Ceiling Dry Location CETL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A 63957-___/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	L 32" W 5" oah 22 to 35 or 11"	L 5.5" W 5.5" H 0.9"	Telescopic Rods and 6" stem, Slope Adapter, Lamps
B 63958-___/FST	4Lt x 100w	J-78	R7s	2900k	6600Lm	L 42.5" W 5" oah 22 to 35 or 11"	L 5.5" W 5.5" H 0.9"	Telescopic Rods and 6" stem, Slope Adapter, Lamps
C 63959-___/FST	5Lt x 100w	J-78	R7s	2900k	8250Lm	L 53.5" W 5" oah 22 to 35 or 11"	L 5.5" W 5.5" H 0.9"	Telescopic Rods and 6" stem, Slope Adapter, Lamps



**Noya Pendant bowl available in alabaster or white glass options**


Finish: BRZ BS Glass: ALB WHT		Certification Ceiling Dry Location CUL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Included	Canopy	Options	
A	23072-___/___	4Lt x 60w	A-19	E-26		D 18" oah 35 to 78"	Rods 6"16"22", 10ft Cord Slope Adapter	D 5.25" H 1.25"	Rods up to 10ft	
	C23072___EN1326B	3Lt x 26w	Spiral	GU-24	2700k	5130Lm	D 18" oah 35 to 78"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	D 5.25" H 1.25"	Rods up to 10ft
B	23073-___/___	4Lt x 60w	A-19	E-26		D 23" oah 35 to 78"	Rods 6"16"22", 10ft Cord Slope Adapter	D 5.25" H 1.25"	Rods up to 10ft	
	C23073___EN1326B	3Lt x 26w	Spiral	GU-24	2700k	5130Lm	D 23" oah 35 to 78"	Rods 6"16"22", 10ft Cord Slope Adapter, Lamps	D 5.25" H 1.25"	Rods up to 10ft



C 23074-BS/WHT



**Noya** Pendant bowl available in alabaster or white glass options

Finish: BRZ BS Glass: ALB WHT		Certification Ceiling Dry Location CUL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
23074-___/___	5Lt x 60w	A-19	E-26			D 27" oah 39.5 to 78"	D 5.25" H 1.25"	Rods 6"16"22", 10ft Cord Slope Adapter	Rods up to 10ft
C23074___EN1326B	3Lt x 26w	Spiral	GU-24	2700k	5130Lm	D 27" oah 39.5 to 78"	D 5.25" H 1.25"	Rods 6"16"22", 10ft Cord Slope Adapter	Rods up to 10ft

C



A 20462GU-BS/WH

B 20463GU-BS/WH



A D 21" H 23.5"

B D 25" H 25.75"



**Aztec Chain supported bowl pendant**

Finish: BS Glass: WHT		Certification Ceiling Damp Location CUL 								
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A	20462GU-BS/WHT	5Lt x 13w	Spiral	GU-24		4900Lm	D 21" H 23.5" oah 35.5 to 95.5"	D 5" H .75"	10ft Cord, 6ft Chain	Chain up to 10ft
	C20462BSWHTEN1158C	1Lt x 58w	2CT6	G10q		3700Lm	D 21" H 23.5" oah 35.5 to 95.5"	D 5" H .75"	10ft Cord, 6ft Chain	Chain up to 10ft
B	20463GU-BS/WHT	5Lt x 26w	Spiral	GU-24		8550Lm	D 25" H 25.75" oah 37.75 to 97.75"	D 5" H .75"	10ft Cord, 6ft Chain	Chain up to 10ft
	C20463BSWHTEN1158C	1Lt x 58w	2CT6	G10q		3700Lm	D 25" H 25.75" oah 37.75 to 97.75"	D 5" H .75"	10ft Cord, 6ft Chain	Chain up to 10ft



- A 50958-BS/WH
- B 50959-BS/WH






A D 17.25" H 6.5"



B D 21.3" H 7.5"



**Leilah Scalloped molded glass aircraft cable suspended pendant**

Finish: BS Glass: WH		Certification Ceiling Dry Location CETL 							
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	
A	50958-BS/WH	2Lt x 60w	A-19	E-26			D 17.25" H 6.5" oah 12 to 120"	D 5.5" H 1"	10ft of Cable & Cord
	C50958BSWHEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	D 17.25" H 6.5" oah 12 to 120"	D 5.5" H 1"	10ft of Cable & Cord, Lamps
B	50959-BS/WH	4Lt x 60w	A-19	E-26			D 21.3" H 7.5" oah 12 to 120"	D 5.5" H 1"	10ft of Cable & Cord
	C50959BSWHEN1413BS 	4Lt x 13w	Spiral	GU-24	2700k	3600Lm	D 21.3" H 7.5" oah 12 to 120"	D 5.5" H 1"	10ft of Cable & Cord, Lamps



A 55545-ANCK/CLR



B 55546-DBRZ/AMB



A D 7.5" H 7.25"

B D 13" H 12.25"

**Flux Retro vintage pendants, includes old style Thomas Edison lamps**

Certification Ceiling Dry Location CETL 												
	Model	Finish	Glass	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
A	55545-ANCK/CLR	ANCK	CLR	1Lt x 60w	ST-18	E-26	2700k	200Lm	D 7.5" H 7.25" oah 16.25 to 54.25"	D 4.75" H .75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft
	55545-DBRZ/___	DBRZ	AMB SMK	1Lt x 60w	ST-18	E-26	2700k	200Lm				
B	55546-ANCK/CLR	ANCK	CLR	1Lt x 60w	ST-18	E-26	2700k	200Lm	D 13" H 12.25" oah 21.25 to 59.25"	D 4.75" H .75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft
	55546-DBRZ/___	DBRZ	AMB SMK	1Lt x 60w	ST-18	E-26	2700k	200Lm				



C 55547-DBRZ/SMK



D 15" H 14.1"

**Flux Retro vintage pendant, includes old style Thomas Edison lamps**

Certification Ceiling Dry Location CETL 

Model	Finish	Glass	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options
55547-ANCK/CLR	ANCK	CLR	3Lt x 60w	ST-18	E-26	2700k	600Lm	D 15" H 14.1" oah 23.1 to 61.1"	D 4.75" H .75"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft
55547-DBRZ/___	DBRZ	AMB SMK	3Lt x 60w	ST-18	E-26	2700k	600Lm				






A 23425-ALU/OPL



B 23426-ALU/OPL

### Helix Metal lantern pendants with opal glass diffusers

Finish: ALU Glass: OPL		Certification Ceiling Dry Location CUL 						
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A 23425-ALU/OPL	1Lt x 100w	A-19	E-26			D 10.75" H 12" oah 18 to 128"	D 5.5" H .75"	10ft Clear Cord
C23425ALUOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 10.75" H 12" oah 18 to 128"	D 5.5" H .75"	10ft Clear Cord, Lamp
B 23426-ALU/OPL	1Lt x 100w	A-19	E-26			D 13.25" H 15" oah 21 to 131"	D 5.5" H .75"	10ft Clear Cord
C23426ALUOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 13.25" H 15" oah 21 to 131"	D 5.5" H .75"	10ft Clear Cord, Lamp





B 50146-CH/CLR

A 50145-CH/CLR

**Metalico** Metal cone encapsulated pendants in a clear glass shades

	Finish: CH Glass: CLR	Certification Ceiling Dry Location CETL 							
	Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included
A	50145-CH/CLR	1Lt x 100w	A-19	E-26			D 16" H 6" oah 18 to 143"	D 5.25" H 1.25"	10ft of Cable & Cord
B	50146-CH/CLR	3Lt x 40w	G9 Hgn	G9	2900k	1440Lm	D 4.5" oah 20 to 120"	L 26" W 3"	10ft of Cord, Lamps



**C** 23952BS/OPL



**A** D 9" H 8" **B** D 12" H 10.5" **C** D 14" H 12"

### Nitrogen Opal glass stem mounted ball pendants with integral slope adapters

Finish: BS Glass: OPL		Certification Ceiling Dry Location CETL 				Canopy: D 5.25" H 1.25"			
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Included	Options	
<b>A</b>	23950-BS/OPL	1Lt x 60w	A-19	E-26			D 9" H 8" oah 17 to 55"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C23950BSOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 9" H 8" oah 17 to 55"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamp	Rods up to 10ft
<b>B</b>	23951-BS/OPL	1Lt x 100w	A-19	E-26			D 12" H 10.5" oah 19.5 to 57.5"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C23951BSOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 12" H 10.5" oah 19.5 to 57.5"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamp	Rods up to 10ft
<b>C</b>	23952-BS/OPL	1Lt x 100w	A-19	E-26			D 14" H 12" oah 21 to 58.5"	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	C23952BSOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	D 14" H 12" oah 21 to 58.5"	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamp	Rods up to 10ft



**B** 23637-BS




### DecoBall Rod pendants with spun steel shades and integral slope adapters

Finish: BS		Certification Ceiling Dry Location CETL 				Canopy: D 5.25" H 1.25"			
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Included	Options	
<b>A</b>	<b>23636-BS</b>	1Lt x 60w	A-19	E-26			<b>D 8" H 6" oah 14 to 52"</b>	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	<b>C23636BSEN1118BS</b> 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	<b>D 8" H 6" oah 14 to 52"</b>	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft
<b>B</b>	<b>23637-BS</b>	1Lt x 100w	A-19	E-26			<b>D 14" H 10" oah 16 to 56"</b>	Rods 6"16"22", 10ft Cord, Slope Adapter	Rods up to 10ft
	<b>C23637BSEN1118BS</b> 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	<b>D 14" H 10" oah 16 to 56"</b>	Rods 6"16"22", 10ft Cord, Slope Adapter, Lamps	Rods up to 10ft



D 2" H 8.75"


### Rain LED Pendant

Finish CH Glass ACR					
Dimensions D 2" H 8.75" oah 15.75 to 129.75" Canopy: D 7.25" H 1"					
Included 10ft Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
70048LED-CH/ACR	7w	LED	Module	3000k	385Lm
Certification Ceiling Dry CETL 					



Diameter 11.81" D 2" H 8.75"

### Rain LED Pendant

Finish CH Glass ACR					
Dimensions Diameter 11.81" D 2" H 8.75" oah 15.75 to 129.75" Canopy: D 11.81" H 1"					
Included 10ft Cord, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
70049LED-CH/ACR	3Lt x 7w	LED	Module	3000k	1155Lm
Certification Ceiling Dry CETL 					



Diameter 11.81" D 1" H 10.25"

### Rain Pendant

Finish CH Glass ACR

Dimensions Diameter 11.81" D 1" H 10.25" oah 18.5 to 132" Canopy: D 11.81" H 1"

Included 10ft Cord, Lamps

Model	Wattage	Type	Base	Kelvin	Lumen
70050LED-CH/ACR	6Lt x 3w	LED	Module	3000k	720Lm

Certification Ceiling Dry CETL



Diameter 17.7" D 1" H 10.25"

### Rain Pendant

Finish CH Glass ACR

Dimensions Diameter 17.7" D 1" H 10.25" oah 18.5 to 132" Canopy: D 17.7" H 1"

Included 10ft Cord, Lamps

Model	Wattage	Type	Base	Kelvin	Lumen
70052LED-CH/ACR	12Lt x 3w	LED	Module	3000k	1440Lm


Certification Ceiling Dry CETL





D 5.25" H 16.4"



### Pure Steel encapsulated dimmable Pendant

Finish BS Glass CLR					
Dimensions D 5.25" H 16.4" oah 24 to 130" Canopy: D 5.2" H 1"					
Included 10ft Cord, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
23762-BS/CLR	1Lt x 18w	CCFL	GX-53	2700k	800Lm
23762LED-BS/CLR Dimmable	1Lt x 13w	LED	GX-53	3000k	1200Lm
Certification Ceiling Dry CETL 					



D 6.1" H 12"

### Iron Metal mesh wrapped around opal glass

Finish BS Glass OPL					
Dimensions D 6.1" H 12" oah 20-58" Canopy: D 4.6" H 1"					
Included Rods 6"16"22", 10ft Cord, Slope Adapter, (lamps with fluorescent fixture)					
Model	Wattage	Type	Base	Kelvin	Lumen
20738-BS/OPL	1Lt x 100w	A-19	E-26		
C20738BSOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm
Certification Ceiling Dry CUL 					



oah 20 to 100"

D 4.4" H 14.75"

### Gyro Pendant

Finish BS Glass CLOP

Dimensions D 4.4" H 14.75" oah 20 to 100" Canopy: D 5" H 1"

Included 10ft Cord, Lamps

Model	Wattage	Type	Base	Kelvin	Lumen
52062-BS/CLOP	1Lt x 60w	G9 Hgn	G9	2900k	800Lm

Certification Ceiling Dry CETL 

Pg 169



oah 15 to 125"

D 5" H 9"

### Proteus Glass 'n Glass cable pendant

Finish BS Glass FRC

Dimensions D 5" H 9" oah 15 to 125" Canopy: D 5" H 1"


Included 10ft of Cable & Cord

Model	Wattage	Type	Base	Kelvin	Lumen
50514-BS/FRC	1Lt x 60w	A-19	E-26		

Certification Ceiling Dry CETL 




### Icicle Fused opal glass in clear glass pendant

Finish CH	Glass CLOP				
Dimensions D 4.25" H 9.5" oah 12 - 130" Canopy: D 5.2" H 1"					
Included 10ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
50543-CH/CLOP	40w	G9 Hgn	G9	2900k	480Lm
Certification Ceiling Dry CETL 					




### Genesis Clear and frosted glass flute pendant

Finish BS	Glass CLF				
Dimensions D 4" H 19" oah 25 - 92" Canopy: D 5.1" H 0.75"					
Included 6ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
50518-BS/CLF	35w	MR-16	GU-10	2700k	260Lm
Certification Ceiling Dry CETL 					






**Onyx Steel wrap pendant**

Finish BS	Glass OPL				
Dimensions D 3" H 8" oah 15 to 130" Canopy: D 5.1" H 0.75"					
Included 10ft of Clear Cord					
Model	Watt	Type	Base	Kelvin	Lumen
50501-BS/OPL	60w	B-10	E-12		
Certification Ceiling Dry CUL 					



**Leilah Scalloped glass mini pendant**


Finish BS	Glass WH				
Dimensions D 4.25" H 4.75" oah 10 to 120" Canopy: D 5.5" H 1"					
Included 10ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
50963-BS/WH	40w	G9 Hgn	G9	2900k	480Lm
Certification Ceiling Dry CETL 					





Fixture D 10" D 3" H 12"

### Spartan Tri-pod glass and mesh cluster pendant

Finish BS	Glass CLM				
Dimensions Canopy D 10" D 3" H 12" oah 20 to 84" Canopy: D 5.2" H 1"					
Included 6ft of Clear Cord, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
50526-BS/CLM	3Lt x 35w	MR-16	GU-10	2700k	780Lm
Certification Ceiling Dry CETL 					




D 3" H 12"

oah 12 to 180"


### Spartan Clear glass and mesh pendant

Finish BS	Glass CLM				
Dimensions D 3" H 12" oah 20 to 80" Canopy: D 5.1" H 0.75"					
Included 6ft of Clear Cord, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
50525-BS/CLM	1Lt x 35w	MR-16	GU-10	2700k	260Lm
Certification Ceiling Dry CETL 					



<b>Retro Steel ball pendant</b>					
Finish BRZ BS CH					
Dimensions D 5" H 6" oah 12 to 132" Canopy: D 4.5" H 0.5"					
Included 10ft of Black Cord					
Model	Watt	Type	Base	Kelvin	Lumen
52102-___	50w	PAR-36 ESD 111	GU-10	2900k	440Lm
Certification Ceiling Dry CETL 					



<b>Tomahawk Steel perforated pendant</b>					
Finish BRZ BS					
Dimensions D 4.4" H 11" oah 20 to 135" Canopy: D 4.5" H 4.5"					
Included 10ft Cord					
Model	Wattage	Type	Base	Kelvin	Lumen
52070-___	1Lt x 60w	A-19	E-26		
Certification Ceiling Dry CETL 					



D 3.5" H 4.5"

**Kristal Crystal pendant**

Finish CH Glass CCL

Dimensions D 3.5" H 4.5" oah 12 to 120" Canopy: D 4.75" H 1"

Included 10ft of Clear Cord, Lamps

Model	Watt	Type	Base	Kelvin	Lumen
51016-CH/CCL	60w	G9 Hgn	G9	2900k	800Lm

Certification Ceiling Damp CETL 

Pg 193



L 2" W 2" H 9"

**Glimmer Crystal mini pendant**

Finish CH Glass CCL

Dimensions D 2" H 9" oah 13 to 120" Canopy: L 4.5" W 4.5"

Included 10ft of Clear Cord, Lamps

Model	Watt	Type	Base	Kelvin	Lumen
51017-CH/CCL	40w	G9 Hgn	G9	2900k	480Lm

Certification Ceiling Dry CETL 




Pg 188



L 2.75" x W 2.75" H 3.25"

**Astor Crystal pendant**

Finish BS	Glass FCL	Canopy: D 4.5" H 0.5"			
Dimensions L 2.75" W 2.75" H 3.25" oah 12 to 120"					
Included 12ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
23905-BS/FCL	40w	G9 Hgn	G9	2900k	480Lm
Certification Ceiling Dry CETL 					




Pg 190



L 3.6" x W 3.6" H 3.2"

**Glas'e Crystal pendant**

Finish CH	Glass FCL	Canopy: D 4.5" H 0.5"			
Dimensions L 3.6" W 3.6" H 3.2" oah 12 to 120"					
Included 12ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
23905SP-CH/FCL	40w	G9 Hgn	G9	2900k	480Lm
Certification Ceiling Dry CETL 					




Pg 191



L 2.4" x W 2.4" H 3.2"

**Glas'e Crystal pendant**

Finish CH	Glass FCL	Canopy: D 4.5" H 0.5"			
Dimensions L 2.4" L 2.4" H 3.2" oah 12 to 120"					
Included 12ft of Clear Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
23905SQ-CH/FCL	40w	G9 Hgn	G9	2900k	480Lm
Certification Ceiling Dry CETL 					

AMB



BLK



BLU



PLM



23733-BS/WHT

### Adele Glass pendant


Finish BS Glass AMB BLK BLU PLM WHT

Dimensions D 3.25" H 6.5" oah 12 to 126" Canopy: D 5.25" H .75"

Included 10ft Cord

Model	Wattage	Type	Base	Kelvin	Lumen
23733-BS/_	1Lt x 60w	A-19	E-26		

Certification Ceiling Dry CETL 

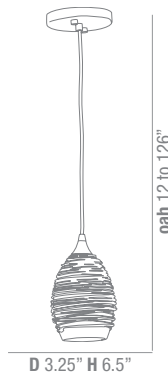

# Midi Pendants

## Simple 5 step process for selecting the pendant

<b>1</b>	<b>Select your model</b>	<b>28011</b>
<b>2</b>	<b>Select lamping choice</b>	<b>1 - Incandescent</b>
<b>3</b>	<b>Select the suspension choice</b>	<b>C - Cord</b>
<b>4</b>	<b>Select Fixture Finish</b>	<b>BS</b>
<b>5</b>	<b>Select Glass Finish</b>	<b>ASKY</b>

### An example of selected model choice with lamping, canopy, finish and glass color

<b>1</b>	<b>Model</b>	<b>2</b>	<b>Lamping</b>	<b>3</b>	<b>Suspension</b>	<b>4</b>	<b>Finish</b>	<b>5</b>	<b>Glass</b>	<b>Completed SKU</b>
	<b>28011</b>		<b>Incandescent</b>		<b>Cord</b>		<b>BS</b>		<b>ASKY</b>	<b>28011-1-C-BS/ASKY</b>

The Midi Pendants use glass shades with a fitter ring of 42mm and a choice of two lamping options, Incandescent E-26 Base and Energy Star GU-24 Base.

Suspension systems available in a cord or rod configuration.

We have simplified the selection by coding the configurations as follows

<b>1</b>	Model	Indicates the first five digits of the items SKU
<b>2</b>	Lamping	<b>1</b> for Incandescent and <b>2</b> for Fluorescent
<b>3</b>	Suspension	<b>C</b> indicates a cord and <b>R</b> for a rod suspension
<b>4</b>	Finish	<b>BS</b> for Brushed Steel, <b>ORB</b> Oil Rubbed Bronze
<b>5</b>	Glass Finish	Select the available finish

Additional Pendants, glass and canopy choices are available in the component section on Pg 254



AMB



RED



WHT



28004-1C-BS/COB


## 28004 Inari Silk martini glass pendant

Charming cone shaped glass provides a subtle twist on everyday lighting in a variety of finishes for any setting.

Model	Lamping	Suspension	Finish	Glass		Dimensions
28004	1 Incandescent	C Cord	BS	AMB	COB	D 7.25" H 6.25"
	2 Fluorescent 	R Rod	ORB	RED	WHT	

Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28004	1	C	BS	COB	28004-1C-BS/COB

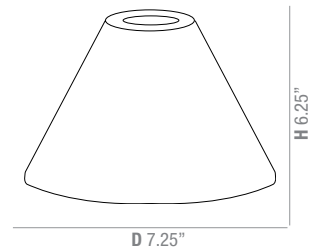

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-20	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-20	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 



ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS

Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"






28011-1C-BS/RUSKY



28011-1C-BS/ASKY

## 28011 Merlot glass pendant

Elongated dome shape offers a refined diffusion of downward light. Gently illuminated by incandescent or fluorescent lighting.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28011	1 Incandescent	C Cord	BS	ASKY RUSKY	D 4.5" H 8"
	2 Fluorescent 	R Rod	ORB		


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28011	1	R	BS	ASKY	28011-1C-BS/ASKY

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

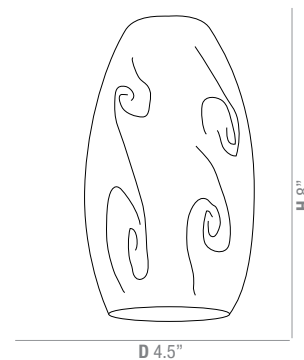

ORB  
Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"




BS  
Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"



28012-1C-BS/AMST

## 28012 Inari Silk champagne glass pendant

An array of designs presented in variety of colors and textures, the Inari collection accents and elevates any room for any occasion.


Model	Lamping	Suspension	Finish	Glass		Dimensions
28012	1 Incandescent	C Cord	BS	AMST	ASKY	D 5.5" H 9"
	2 Fluorescent 	R Rod	ORB	BLUSKY	BRST	
				CRM	ICA	
				MYA	OPL	
				RED	WHST	

Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28012	1	C	BS	AMST	28012-1C-BS/AMST

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

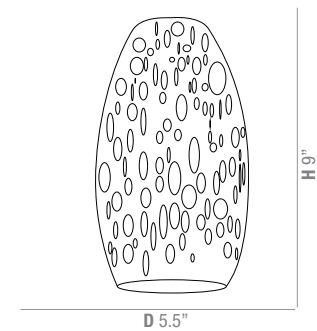

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

Certification Ceiling Dry CUL 




Wicker Finish




28018-1C-BS/WAMB

## 28018 Inari Silk bordeaux glass pendant

Elongated dome shape offers a refined diffusion of downward light, gently illuminated by incandescent or fluorescent lighting.

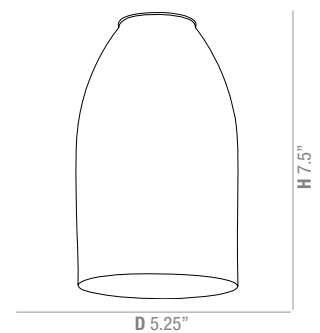

Model	Lamping	Suspension	Finish	Glass	Dimensions
28018	1 Incandescent	C Cord	BS	AMB	D 5.25" H 7.5"
	2 Fluorescent 	R Rod	ORB	COB	
				OPL	
				RED	
				WAMB	
WRED					
WWHT					



Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28018	1	C	BS	WAMB	28018-1C-BS/WAMB

Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps



Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

Certification Ceiling Dry CUL 



28022-1C-BS/LGR

## 28022 Cone glass pendant

Elegant lime-green light brings a colorful and vibrant accent to any traditional or modern setting.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28022	1 Incandescent	C Cord	BS	LGR	D 5.5" H 6.5"
	2 Fluorescent 	R Rod	ORB		


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28022	1	C	BS	LGR	28022-1C-BS/LGR

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

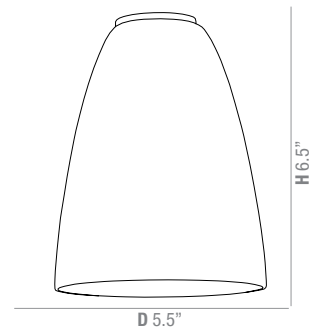

D 5.5"

H 6.5"




ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS


Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

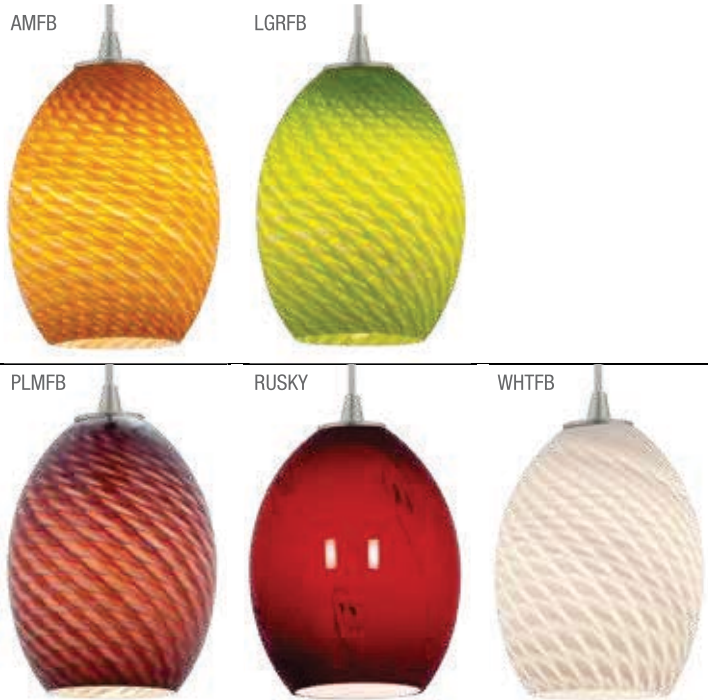

28023-1C-BS/PLMFB

## 28023 Brandy FireBird glass pendant



Eye-catching beauty and elegant design fills an atmosphere with a brilliant hue and embraces ingenuity with its eclectic variety.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28023	1 Incandescent	C Cord	BS	AMBFB ASKY	D 6" H 9"
	2 Fluorescent 	R Rod	ORB	LGRFB PLMFB RUSKY WHTFB	


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28023	1	C	BS	PLMFB	28023-1C-BS/PLMFB

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

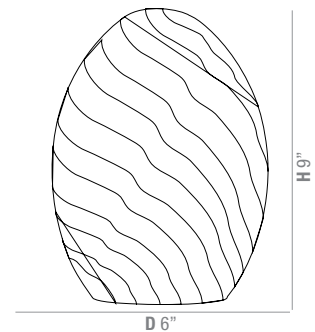

ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS

Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"




SDS



BRS




28024-1C-BS/AMS



## 28024 Cabernet glass pendant

Reminiscent of a Marble stone fusing into each other, the Cabernet glass has a unique earthy feel, blending into most discerning interiors.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28024	1 Incandescent	C Cord	BS	AMS BRS	D 4.92" H 12"
	2 Fluorescent 	R Rod	ORB	SDS	

Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28024	1	C	BS	AMS	28024-1C-BS/AMS

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps



ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS

Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

Certification Ceiling Dry CUL 



OPL



RED



28030-1C-BS/AMB

## 28030 Cylinder glass pendant



Cylindrical design creates a spectacular exhibition of descending light. Complimented by an assortment of colors.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28030	1 Incandescent	C Cord	BS	AMB OPL	D 4" H 10"
	2 Fluorescent 	R Rod	ORB	RED	


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28030	1	C	BS	AMB	28030-1C-BS/AMB

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

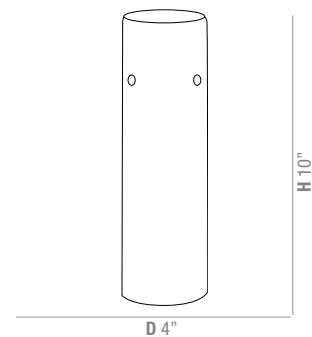

ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS

Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"



CLOP




CLRD



28033-1C-BS/CLAM

## 28033 Glass n Glass cylinder pendant

Fresh bold design that enthralls with vivid colors enhanced by a transparent protective outer glass shield.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28033	1 Incandescent	C Cord	BS	CLAM CLOP	D 4.75" H 9.5"
	2 Fluorescent 	R Rod	ORB	CLRD	


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28033	1	C	BS	CLAM	28033-1C-BS/CLAM

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

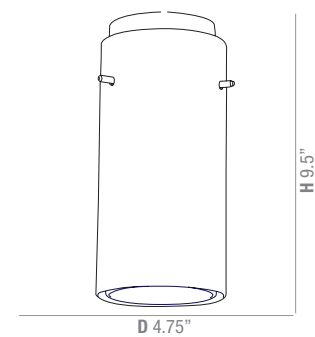

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"





28069-1C-ORB/AMB



28069-1C-BS/OPL

## 28069 Sherry glass pendant


This graceful design displays a charming dome shaped glass and adds contrast and depth to any room.

Model	Lamping	Suspension	Finish	Glass		Dimensions
28069	1 Incandescent	C Cord	BS	AMB	OPL	D 4.5" H 6"
	2 Fluorescent 	R Rod	ORB			


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28069	1	C	BS	AMB	28069-1C-BS/AMB

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 



ORB

Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



BS

Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"




28070-1C-BS/AMB



28070-1C-BS/WHT

## 28070 Cognac glass pendant

This unique elongated glass allows for a spectacular display of light. Creating a simply delicate, defined and functional scheme in a modern-day presence.

Model	Lamping	Suspension	Finish	Glass	Dimensions
28070	1 Incandescent	C Cord	BS	AMB WHT	D 4.75" H 10.25"
	2 Fluorescent 	R Rod	ORB		


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28070	1	C	BS	AMB	28070-1C-BS/AMB

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 



Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"




28078-1C-BS/PLC



28078-1C-BS/PLS

## 28078 Chianti glass pendant



Elongated dome shape offers a refined diffusion of downward light. Gently illuminated in incandescent or fluorescent lighting.

Model	Lamping	Suspension	Finish	Glass		Dimensions
28078	1 Incandescent	C Cord	BS	PLC	PLS	D 5.25" H 7.5"
	2 Fluorescent 	R Rod	ORB			


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28078	1	C	BS	PLC	28078-1C-BS/PLC

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-20	E-27			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-20	E-27			Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps
2C	1Lt x 18w 	Spiral	GU-25	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB
2R	1Lt x 18w 	Spiral	GU-25	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps

Certification Ceiling Dry CUL 

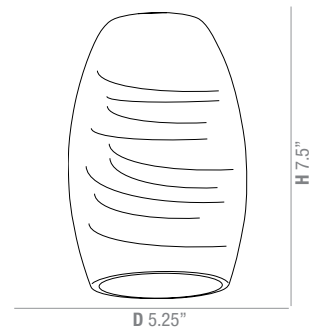

ORB  
Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"




BS  
Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"



## 2 3 7 6 0 Acrolite pendant shade

Lexon Molded Acrylic Domes, available in multiple finishes and are proudly American Made.

Model	Lamping	Suspension	Finish	Glass		Dimensions
23760	1 Incandescent	C Cord	BRZ	APCL	ASM	D 18" H 18"
	2 Fluorescent 	R Rod	BS	AWH	AYEL	

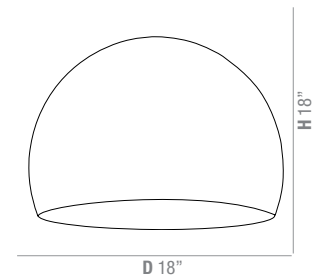

Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
23760	1	C	BRZ	ASM	23760-1C-BRZ/ASM

### Suspension System and Lamping Specifications


	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-40	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-40	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps



Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

Certification Ceiling Dry GETL 




23760-1R-BRZ/ASM  
shown with E-26 Base Plumen lamp not Included



28088-1C-ORB/WHTLN

## 28085 | 7 | 8 Japanese lantern glass pendants


Delicate white etched Glass shades reminiscent of age old Japanese paper lanterns, multiple pendant options to suite most applications


Model	Lamping	Suspension	Finish	Glass	Dimensions
28085	1 Incandescent	C Cord	BS	WHTLN	D 8" H 8"
28087	2 Fluorescent 	R Rod	ORB		D 10" H 10"
28088					D 12" H 12"


Example for selecting model choice with lamping, suspension, finish and glass color

Model	Lamp Type	Suspension	Finish	Glass Finish	Completed SKU
28088	1	C	ORB	WHTLN	28088-1C-ORB/WHTLN


### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
1C	1Lt x 100w	A-19	E-26			12ft Clear Cord with BS Black Cord with ORB
1R	1Lt x 100w	A-19	E-26			Rods 6"16"22", 10ft Cord, Integral Slope Adapter
2C	1Lt x 18w 	Spiral	GU-24	2700k	1250Lm	12ft Clear Cord with BS Black Cord with ORB, Lamps
2R	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps


Certification Ceiling Dry CUL 



(s) 28085 D 8"



(m) 28087 D 10"



(l) 28088 D 12"



Canopy for R type Rod Suspension  
Dimensions D 5.25" H 1.4"



Canopy for C type Cord Suspension  
Dimensions D 5.25" H 1.4"

# Mini Pendants

## Simple 5 step process for selecting the pendant

<b>1</b>	<b>Select your model</b>	<b>96121</b>
<b>2</b>	<b>Select available lamping choice</b>	<b>12v - Low Voltage Halogen</b>
<b>3</b>	<b>Select the available canopy choice</b>	<b>1 - Flat Canopy</b>
<b>4</b>	<b>Select Fixture Finish</b>	<b>BS</b>
<b>5</b>	<b>Select Glass Finish</b>	<b>BSC</b>

### An example of selected model choice with lamping, canopy, finish and glass color

<b>1</b>	<b>Model</b>	<b>2</b>	<b>Lamping</b>	<b>3</b>	<b>Canopy</b>	<b>4</b>	<b>Finish</b>	<b>5</b>	<b>Glass</b>	<b>Completed SKU</b>
	<b>96121</b>		<b>12V</b>		<b>1</b>		<b>BS</b>		<b>BSC</b>	<b>96121-12V-1-BS/BSC</b>

Our Mini Pendants are compatible with most glass shades with a fitter of 22mm, unless glass cylinders are used and a spider ring and pins is required for glass suspension.

A choice of three lamping options are available, 12v Low and 120v Line Voltage Halogen and LED's. The canopy options if available on the selected pendant are represented by numbers **0 thru 5**

**Low Voltage 12v Halogen** pendants are available with multiple canopy options,

- 0** No canopy required, the pendant will be supplied with Uni-Jack plug for use on multi-port canopies or compatible track or rail systems.
- 1** Flat slimline canopy, supplied with a Class-2 transformer to be remoted in the Junction Box.
- 2** Dome canopy, transformer is internally mounted within the canopy and the canopy attaches directly to the Junction Box.
- 3** Sphere canopy, transformer is internally mounted in the canopy and the canopy attaches directly to the Junction Box.

**LED** pendants, no additional canopy options available.

- 4** Spherical canopy with matching driver is internally mounted within the canopy, attaches directly to the Junction box.

**Line Voltage 120v Halogen** pendants, no additional canopy options available.


- 5** Flat slimline canopy supplied with line-voltage 120v option.



<b>70040LED Dewdrop high output led pendant</b>					
Finish CH Diffuser CLFR					
Dimensions D 4" H 10 to 120" Canopy: D 4.75" H 1.4"					
Included 10ft Cord, Lamps					
Model	Watt	Type	Base	Kelvin	Lumen
70040LED-CH/CLFR	4.5w	LED	Module	3000k	215Lm

Certification Ceiling Dry CETL 



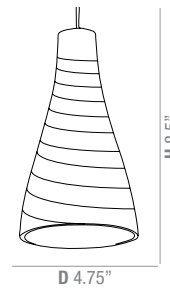

## 23218UJ Italian wire glass pendant

Classic Italian mouth blown glass with a modern twist. Streams of glass piping provide an alluring drape of light whilst providing a controlled downward beam of light.

Model	- Canopy	- Finish	/ Glass	Glass Dimensions
23218UJ	0	BRZ	BLC	D 4.75" H 8.5"
	1	BS	CRY	
	2		MTL	
	3		ORO	

### Example of Pendant Selection

Example of Pendant Selection						Completed SKU	
23218UJ	-	1	-	BS	/	ORO	23218UJ-1-BS/ORO

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL

23218UJ available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy




Transformer is housed within the canopy.


#### 3 - Sphere Canopy

Transformer is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems. See Pg 271-272.



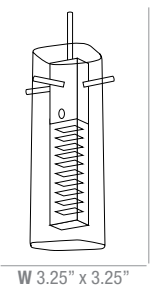

## 52072UJ Matrix etched glass in glass pendant

Laser etched rectangular crystal encapsulated in a clear square glass, emits a distinctive light pattern.

Model	- Canopy	- Finish	/ Glass	Glass Dimensions
52072UJ	0	BS	CCL	H 9.75" W 3.25" x 3.25"
	1			
	2			
	3			

### Example of Pendant Selection

Example of Pendant Selection	Completed SKU
5 2 0 7 2 U J - 1 - BS / CCL	52072UJ-1-BS/CCL

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 20w	MR-11	G-4	3000k	240Lm	10ft Co-Axial Cable, Lamp

Certification Ceiling Dry CETL 

52072UJ available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy




Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.

#### 3 - Sphere Canopy

Transformer is housed within the canopy.



0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems. See Pg 271-272.



## 52075UJ RainDrop solid glass orb pendant

Solid glass crystal Orb, with delicately infused bubbles creates a soothing atmosphere

Model	-	Canopy	-	Finish	/	Glass	Glass Dimensions
52075UJ		0		BS		CCL	D 3.5" H 3.5"
		1					
		2					
		3					

### Example of Pendant Selection


### Completed SKU

5	2	0	7	5	U	J	-	1	-	BS	/	CCL	52075-1-BS/CCL
---	---	---	---	---	---	---	---	---	---	----	---	-----	----------------

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 20w	JC	G-4	2900k	300Lm	10ft Co-Axial Cable, Lamp

Certification Ceiling Dry CETL 



52075UJ available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.




#### 3 - Sphere Canopy

Transformer is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.





52001-BS



52001-BL

## 52001 Odyssey steel pendant

### 52001LED

The Odyssey steel bullet pendant with special perforations for dramatic side light emissions. A controlled downward beam spread for functional lighting.

Model	Lamping	Finish	Canopy	Shade Dimensions
52001		BL	0	D 2" H 9.25"
52001LED	LED	BS	1 2 3	

#### Example of Pendant Selection


#### Completed SKU

52001	-		BS	-	1	52001-BS-1
52001LED	-	LED	BS	-	1	52001LED-BS-1

#### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12v Hgn	1Lt x 35w	MR-16	GU-5.3	2900k	360Lm	10ft Co-Axial Cable, Lamp
12v LED	1Lt x 4w	MR-16	GU-5.3	3000k	215Lm	10ft Co-Axial Cable, Lamp

Certification Ceiling Dry CETL



H 9.25"

D 2"

52001 and 52001LED available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy


Transformer is housed within the canopy.

#### 3 - Sphere Canopy

Transformer is housed within the canopy.


0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems. See Pg 271-272.




1 D 4.5"

H 0.5"



2 D 4.5"

H 4.5"



3 D 4.5"

H 4.5"

52052UJ-BS



52052UJ-BRZ



## 52052UJ Apollo steel pendant

The Apollo steel pendant with special perforations for dramatic side light emissions. A controlled downward beam spread for functional lighting.

Model	Finish	Canopy	Shade Dimensions
52052UJ	BRZ	0	D 3" H 18"
	BS	1	
		2	
		3	

### Example of Pendant Selection


### Completed SKU

52052UJ	-	BS	-	1	52052UJ-BS-1
---------	---	----	---	---	--------------

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 50w	MR-16	GU-5.3	2900k	514Lm	10ft Co-Axial Cable, Lamp

Certification Ceiling Dry CETL 

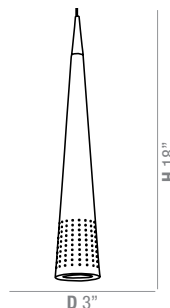

52052UJ available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.


#### 3 - Sphere Canopy

Transformer is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

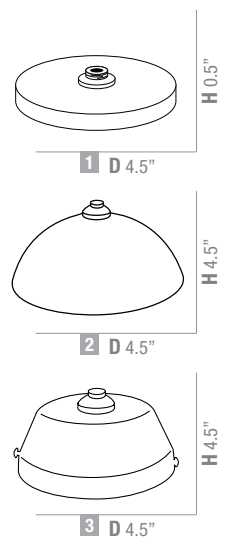



## 9 4 5 3 1 Teardrop pendant 9 4 5 3 1 LED

Contemporary mouth blown tear shaped glass with an elegant opal and clear finish. The teardrop compliments a variety of stylish LED and Halogen Pendant choices.

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
94531	12v	0	BRZ	WTP	D 2.25" H 9"
	LED	1	BS		
		2			
		3			
		4*			

Example of Low Voltage 12v Pendant Selection

Completed 12v SKU

94531	-	12v	-	1	-	B R Z	/	WTP	94531-12V-1-BRZ/WTP
-------	---	-----	---	---	---	-------	---	-----	---------------------

Example of LED Pendant Selection

Completed LED SKU

94531		LED	-	4	-	B R Z	/	WTP	94531LED-4-BRZ/WTP
-------	--	-----	---	---	---	-------	---	-----	--------------------

\* Canopy selection 4 is by default no alternative canopy choices are available for the LED pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
LED	1Lt x 4.5w	LED	Module	3000k	370Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL 



94531 available with multiple canopy options.

1 thru 3.

**1 - Flat Canopy**

Sleek and low profile, class-2 transformer is housed in the J-Box.

**2 - Dome Canopy**

Transformer is housed within the canopy.

**3 - Sphere Canopy**


Transformer is housed within the canopy.

**4 - LED Canopy**

Driver is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems. See Pg 271-272.

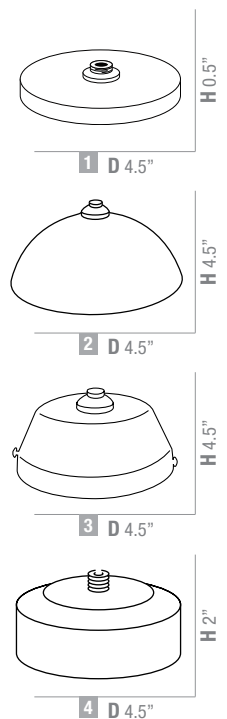



# 94019 Mania conical pendant

## 94019 LED

Clean simple lines make this pendant timeless, an ideal choice for most applications.

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
94019	12v	0	BRZ	COB	D 4" H 5"
	LED	1	BS	FST	
		2		RED	
		3			
		4*			

Example of Low Voltage 12v Pendant Selection

Completed 12v SKU

94019	-	12v	-	1	-	BS	/	FST	94019-12V-1-BS/FST
-------	---	-----	---	---	---	----	---	-----	--------------------

Example of LED Pendant Selection

Completed LED SKU


94019		LED	-	4	-	BS	/	FST	94019LED-4-BS/FST
-------	--	-----	---	---	---	----	---	-----	-------------------

\* Canopy selection 4 is by default no alternative canopy choices are available for the LED pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
LED	1Lt x 4.5w	LED	Module	3000k	370Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL



94019 available with multiple canopy options.

1 thru 3.

**1 - Flat Canopy**

Sleek and low profile, class-2 transformer is housed in the J-Box.

**2 - LED Canopy**

Transformer is housed within the canopy.

**3 - Sphere Canopy**

Transformer is housed within the canopy.


**4 - LED Canopy**

Driver is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

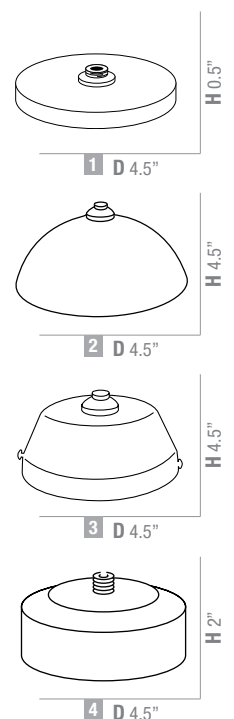



## 9 6 1 2 1 - 1 2 V Techno metal pendant 9 6 1 2 1 - 1 2 0 V

This two piece shade comprising of a spun steel inner shade encapsulated within a thick clear glass dome, contemporary and functional. Available in both Low voltage and 120v Line Voltage options.

Model	- Lamping	- Canopy	- Finish	/ Glass	Glass Dimensions
9 6 1 2 1	12v	0	BRZ	BSC	D 5.25" H 3.8"
	120v	1	BS		
		2			
		3			
		5*			

### Example of Low Voltage 12v Pendant Selection

Completed 12v SKU

9 6 1 2 1	-	12v	-	1	-	B S	/	BSC	96121-12V-1-BS/BSC
-----------	---	-----	---	---	---	-----	---	-----	--------------------

### Example of Line Voltage 120v Pendant Selection

Completed 120v SKU


9 6 1 2 1	-	120v	-	5	-	B S	/	BSC	96121-120V-5-BS/BSC
-----------	---	------	---	---	---	-----	---	-----	---------------------

\* Canopy selection 5 is by default no alternative canopy choices are available for the 120v Line voltage pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
120V	1Lt x 40w	JCD	G-9	2700k	480Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL



96121 available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.

#### 3 - Sphere Canopy

Transformer is housed within the canopy.


#### 5 - Flat LV Canopy

Low profile only for use with 120v LV sytem.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

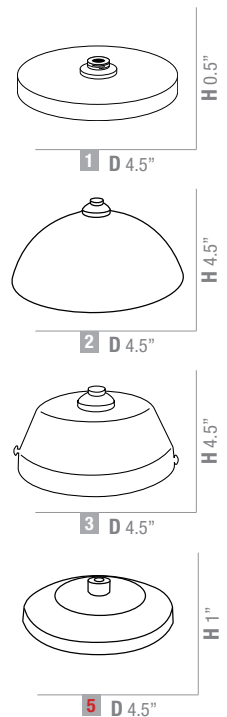





## 9 6 9 1 8 - 1 2 V **Hermes square glass** 9 6 9 1 8 - 1 2 0 V

These delicate square glass shades afford a clean contemporary look to most applications

Model	- Lamping	- Canopy	- Finish	/ Glass	Glass Dimensions
9 6 9 1 8	12v	0	BRZ	AMB	L 3" W 3" H 3.5"
	120v	1	BS	O P L	
		2			
		3			
		5*			

### Example of Low Voltage 12v Pendant Selection

Model	- Lamping	- Canopy	- Finish	/ Glass	Completed 12v SKU
9 6 9 1 8	- 12v	- 1	- B S	/ O P L	96918-12V-1-BS/OPL

### Example of Line Voltage 120v Pendant Selection


Model	- Lamping	- Canopy	- Finish	/ Glass	Completed 120v SKU
9 6 9 1 8	- 120v	- 5	- B S	/ O P L	96918-120V-5-BS/OPL

\* Canopy selection 5 is by default no alternative canopy choices are available for the 120v Line voltage pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
120V	1Lt x 40w	JCD	G-9	2700k	480Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL



96121 available with multiple canopy options.

1 thru 3.

#### 1 - Flat Canopy

Sleek and low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.

#### 3 - Sphere Canopy





Transformer is housed within the canopy.



#### 5 - Flat LV Canopy

Sleek and low profile.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems. See Pg 271-272.



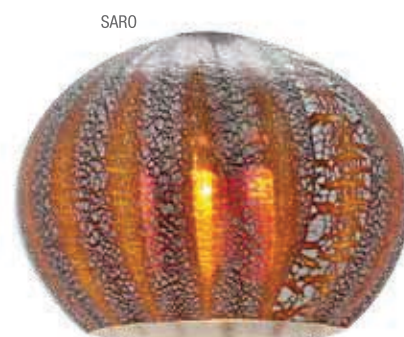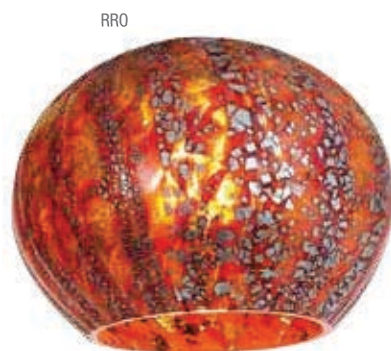

## 9 6 9 8 0 - 1 2 V Safari Italian opaline pendant

## 9 6 9 8 0 - 1 2 0 V

Organic dome shaped glass, hand crafted using a unique opaline coating providing a warm glow. The Italian glass is accentuated with silver leaf and presented in contemporary finishes of amber, green and red.

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
9 6 9 8 0	12v	0	BRZ	GRO	D 5" H 3.5"
	120v	1	BS	R R O	
		2		S A O	
		3		S A R O	
		5*			

### Example of Low Voltage 12v Pendant Selection

9 6 9 8 0	-	12v	-	1	-	B S	/	S A R O	96980-12V-1-BS/SARO
-----------	---	-----	---	---	---	-----	---	---------	---------------------

### Completed 12v SKU

### Example of Line Voltage 120v Pendant Selection

9 6 9 8 0	-	120v	-	5	-	B S	/	S A R O	96980-120V-5-BS/SARO
-----------	---	------	---	---	---	-----	---	---------	----------------------


### Completed 120v SKU

\* Canopy selection 5 is by default no alternative canopy choices are available for the 120v Line voltage pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
120V	1Lt x 40w	JCD	G-9	2700k	480Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL 



96980 available with multiple canopy options. 1 thru 3.

#### 1 - Flat Canopy

Low profile, class-2 transformer is housed in the J-Box.

#### 2 - Dome Canopy

Transformer is housed within the canopy.

#### 3 - Sphere Canopy

Transformer is housed within the canopy.


#### 5 - Flat LV Canopy

Low profile only for use with 120v LV system.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

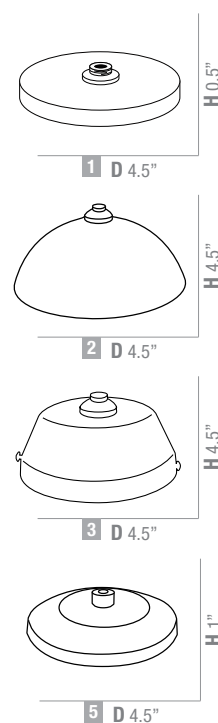



**9 6 9 4 2 - 1 2 V** Fire glass amber marble pendant  
**9 6 9 4 2 - 1 2 0 V**

Classic timeless dome glass pendant with a modern hand blown amber marble finish, emulating a natural onyx

Model	-	Lamping	-	Canopy	-	Finish	/	Glass	Glass Dimensions
9 6 9 4 2		12v		0		BRZ		AMM	D 5" H 4.4"
		120v		1		BS			
				2					
				3					
				5*					

Example of Low Voltage 12v Pendant Selection

Example of Low Voltage 12v Pendant Selection									Completed 12v SKU
9 6 9 4 2	-	12v	-	1	-	B S	/	AMM	96942-12V-1-BS/AMM

Example of Line Voltage 120v Pendant Selection


Example of Line Voltage 120v Pendant Selection									Completed 120v SKU
9 6 9 4 2	-	120v	-	5	-	B S	/	AMM	96942-120V-5-BS/AMM

\* Canopy selection 5 is by default no alternative canopy choices are available for the 120v Line voltage pendant.

Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
120V	1Lt x 40w	JCD	G-9	2700k	480Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL 



96980 available with multiple canopy options. 1 thru 3.

**1 - Flat Canopy**

Low profile, class-2 transformer is housed in the J-Box.

**2 - Dome Canopy**

Transformer is housed within the canopy.

**3 - Sphere Canopy**

Transformer is housed within the canopy.


**5 - Flat LV Canopy**


Low profile only for use with 120v LV system.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

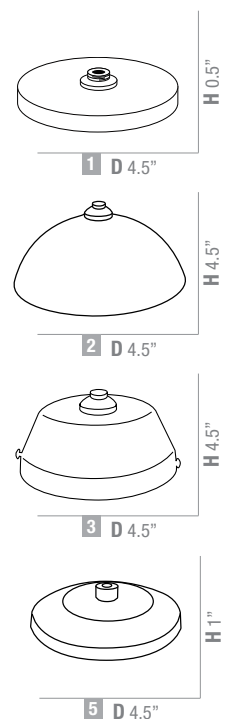



# 94941 - 12V Fire glass cone pendant

# 94941 LED

Classic timeless dome glass pendant with a modern hand blown amber marble finish, emulating a natural onyx

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
94941	12v	0	BRZ	AMM	D 4.5" H 4.9"
	LED	1	BS		
		2			
		3			
		4*			

Example of Low Voltage 12v Pendant Selection

Completed 12v SKU

94941	-	12v	-	1	-	B S	/	AMM	94941-12V-1-BS/AMM
-------	---	-----	---	---	---	-----	---	-----	--------------------

Example of LED Pendant Selection

Completed LED SKU

94941		LED	-	4	-	B S	/	AMM	94941LED-4-BS/AMM
-------	--	-----	---	---	---	-----	---	-----	-------------------

\* Canopy selection 4 is by default no alternative canopy choices are available for the LED pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
LED	1Lt x 4.5w	LED	Module	3000k	370Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL

94941 available with multiple canopy options.

1 thru 3.

**1 - Flat Canopy**

Sleek and low profile, class-2 transformer is housed in the J-Box.

**2 - Dome Canopy**

Transformer is housed within the canopy.

**3 - Sphere Canopy**

Transformer is housed within the canopy.


**4 - LED Canopy**

Driver is housed within the canopy.

**0** is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.

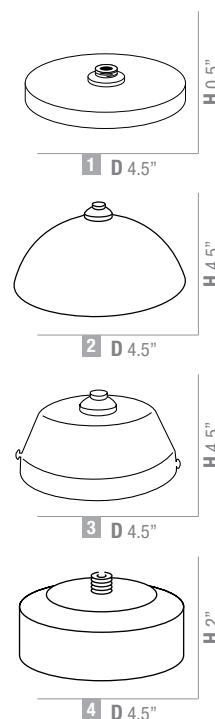



# 9 4 9 3 2 - 1 2 V Inari silk cylinder pendant

# 9 4 9 3 2 LED

These cylindrical glass pendants available in a smooth or hand etched finish, offer the best in contemporary lighting.

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
94932	12v	0	BRZ	AMB	D 3" H 10"
	LED	1	BS	BLKLN	
		2		BLULN	
		3		COB	
		4*		OPL	
				PLUM	
				REDLN	
				WHTLN	

### Example of Low Voltage 12v Pendant Selection

94932	-	12v	-	1	-	B S	/	WHTLN	94932-12V-1-BS/WHTLN
-------	---	-----	---	---	---	-----	---	-------	----------------------

Completed 12v SKU

### Example of LED Pendant Selection


94932		LED	-	4	-	B S	/	WHTLN	94932LED-4-BS/WHTLN
-------	--	-----	---	---	---	-----	---	-------	---------------------

Completed LED SKU

\* Canopy selection 4 is by default no alternative canopy choices are available for the LED pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
12V	1Lt x 35w	JC	GY6.35	2900k	600Lm	10ft Cable Clear with BS, Black with BRZ, Lamp
LED	1Lt x 4.5w	LED	Module	3000k	370Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

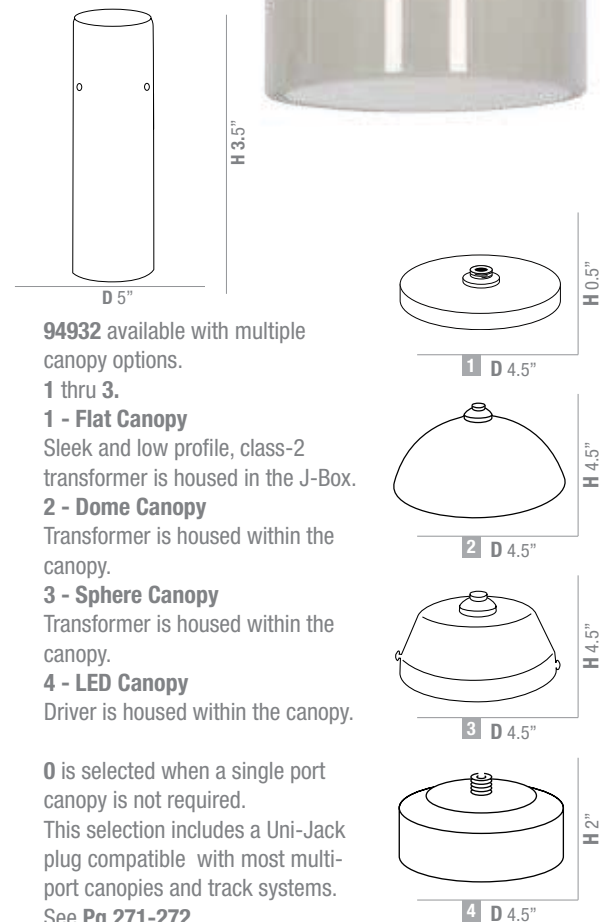

94932 available with multiple canopy options.

1 thru 3.

**1 - Flat Canopy**

Sleek and low profile, class-2 transformer is housed in the J-Box.

**2 - Dome Canopy**

Transformer is housed within the canopy.

**3 - Sphere Canopy**

Transformer is housed within the canopy.

**4 - LED Canopy**

Driver is housed within the canopy.

0 is selected when a single port canopy is not required.

This selection includes a Uni-Jack plug compatible with most multi-port canopies and track systems.

See Pg 271-272.



## 7 2 9 7 7 Iridescent cylinder pendant

Sharp cylindrical design utilizing an iridescent inner coating on a transparent glass, creates a rich and vivid look.

Model	Lamping	Canopy	Finish	Glass	Glass Dimensions
72977	LED	4*	BRZ BS	IRD	D 4" H 11"

Example of LED Pendant Selection

Completed LED SKU



72977	LED	-	4	-	B R Z	/	IRD	72977LED-4-BRZ/IRD
-------	-----	---	---	---	-------	---	-----	--------------------

\* Canopy selection 4 is by default no alternative canopy choices are available for the LED pendant.

### Suspension System and Lamping Specifications

	Wattage	Type	Base	Kelvin	Lumen	Included
LED	1Lt x 4.5w	LED	Module	3000k	370Lm	10ft Cable Clear with BS, Black with BRZ, Lamp

Certification Ceiling Dry CETL

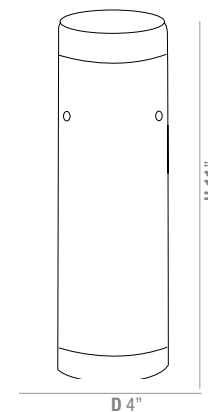

# Semi-Flush






B 51003-CH/CCL



Pg 8

**Kristal** Crystal semi-flush

<b>Finish:</b> CH <b>Glass:</b> CCL				<b>Canopy:</b> D 5.8" H 1"	
Model	Wattage	Type	Base	Dimensions	
A 51002-CH/CCL	3Lt x 60w	B-10	E-12	D 15" H 14"	
B 51003-CH/CCL	6Lt x 60w	B-10	E-12	D 20" H 18"	
<b>Certification</b> Ceiling Dry Location <b>CETL</b> 					



A D 15"



B D 20"


H 14"

H 18"



Pg 192

**Prizm** Cantilevered semi flush a unique and stylish design

<b>Finish:</b> CH <b>Glass:</b> CCL								
Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
23924-CH/CCL	3Lt x 60w	G9 Hgn	G9	2900k	2400Lm	Lamps	D 20" H 11"	D 5" H 1"
<b>Certification</b> Ceiling Damp Location <b>CETL</b> 								




D 20"

H 11"






A 55504-CH

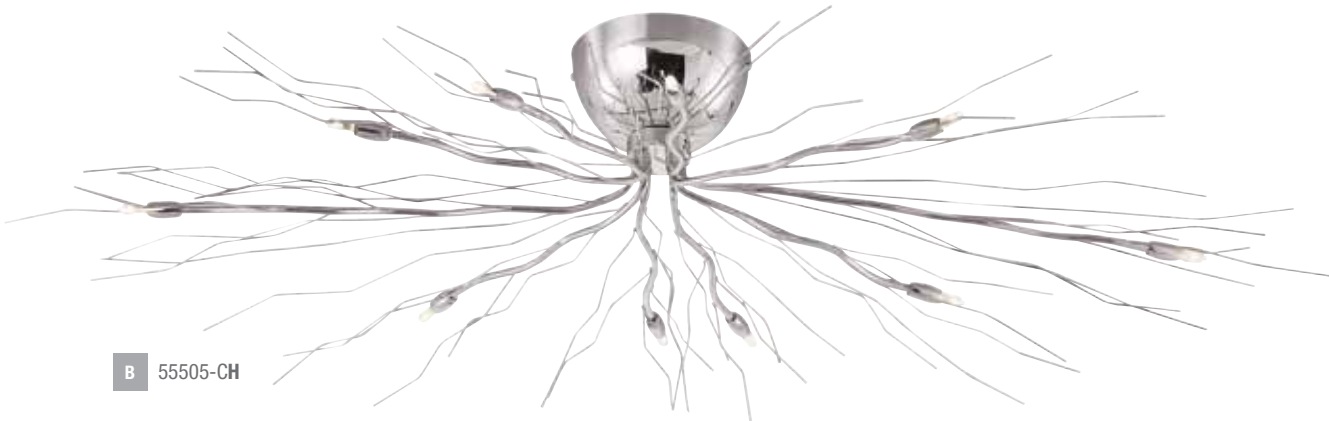

B 55505-CH

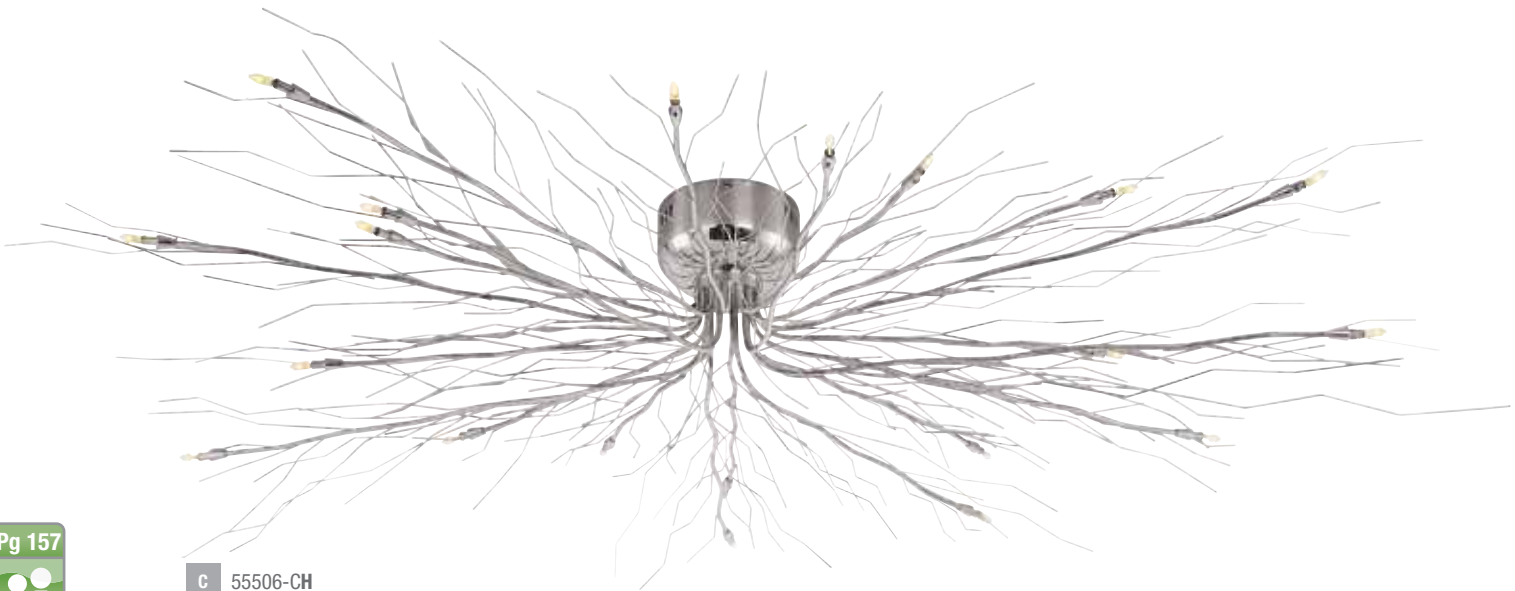


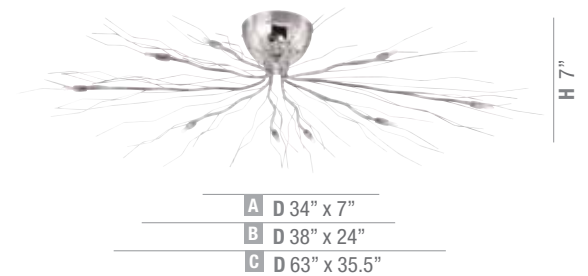
C 55506-CH



**Sol** Tree Branch Semi-Flush

Finish:	Optional LED G-4 Lamps available model G4LEDSMD1.5W							
Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
A 55504-CH	10Lt x 10w	Bi-Pin HGN 12v	G4	2900k	1200Lm	Lamps	D 34" H 7"	D 5.5" H 2.75"
B 55505-CH	10Lt x 10w	Bi-Pin HGN 12v	G4	2900k	1200Lm	Lamps	L 38" W 24" H 7"	D 5.5" H 2.75"
C 55506-CH	20Lt x 10w	Bi-Pin HGN 12v	G4	2900k	2400Lm	Lamps	L 63" W 35.5" H 8"	D 7.2" H 3.5"

Certification Ceiling Damp Location **CETL** 





Pg 36

**Aztec** Semi flush bowl

**Finish:** BS **Glass:** WHT

Model	Wattage	Type	Base	Dimensions	Canopy
20460GU -BS/WHT	3Lt x 13w	Spiral	GU-24	D 17" H 17.5"	D 5.2" H 1"

**Certification** Ceiling Damp Location **CUL** 



Pg 80

23071-BRZ/ALB

**Noya** Cable Semi-Flush

**Finish:** BRZ BS **Glass:** ALB WHT

Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
23071-___/___	3Lt x 60w	A-19	E-26				D 16" H 17"	D 4.8" H 1"
C23071 _____ EN1313B	6Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps	D 16" H 17"	D 4.8" H 1"

**Certification** Ceiling Dry Location **CUL** 

23071-BS/WHT

D 16"

H 17"



**Helius** Semi-Flush, clear plate glass with frosted centre

Finish: CH Glass: CFR

Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
50481-BS/CFR	1Lt x 150w	J-78	R7s	2900k	2600Lm	Lamps	D 12" H 8"	D 8.25" H 1"

Certification Ceiling Damp Location **CETL**



glass facing up



**Argon** featuring a flip-able glass shade, mountable in a face up or down position

Finish: BS Glass: FST

Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
50451-BS/FST	1Lt x 150w	J-78	R7s	2900k	2600Lm	Lamps	D 16" H 9"	D 9" H 1.75"

Certification Ceiling Dry Location **CETL**



glass facing down

D 16"



A 63960-MC/FST



B 63961-ORB/FST

Pg 13



**Nido** Multiple mounting options, ceiling semi-flush or wall & vanity fixture

**Finish:** MC ORB **Glass:** FST

	Model	Wattage	Type	Base	Kelvin	Lumen	Included	Dimensions	Canopy
A	63960-___/FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	Lamps	L 32" W 3" H 5"	L 7.25" W 4.5" H 1"
B	63961-___/FST	4Lt x 100w	J-78	R7s	2900k	6600Lm	Lamps	L 42" W 3" H 5"	L 7.25" W 4.5" H 1"

**Certification** Ceiling Dry Location **CETL** 




A L 32"



B L 42"

# Flush-Mounts

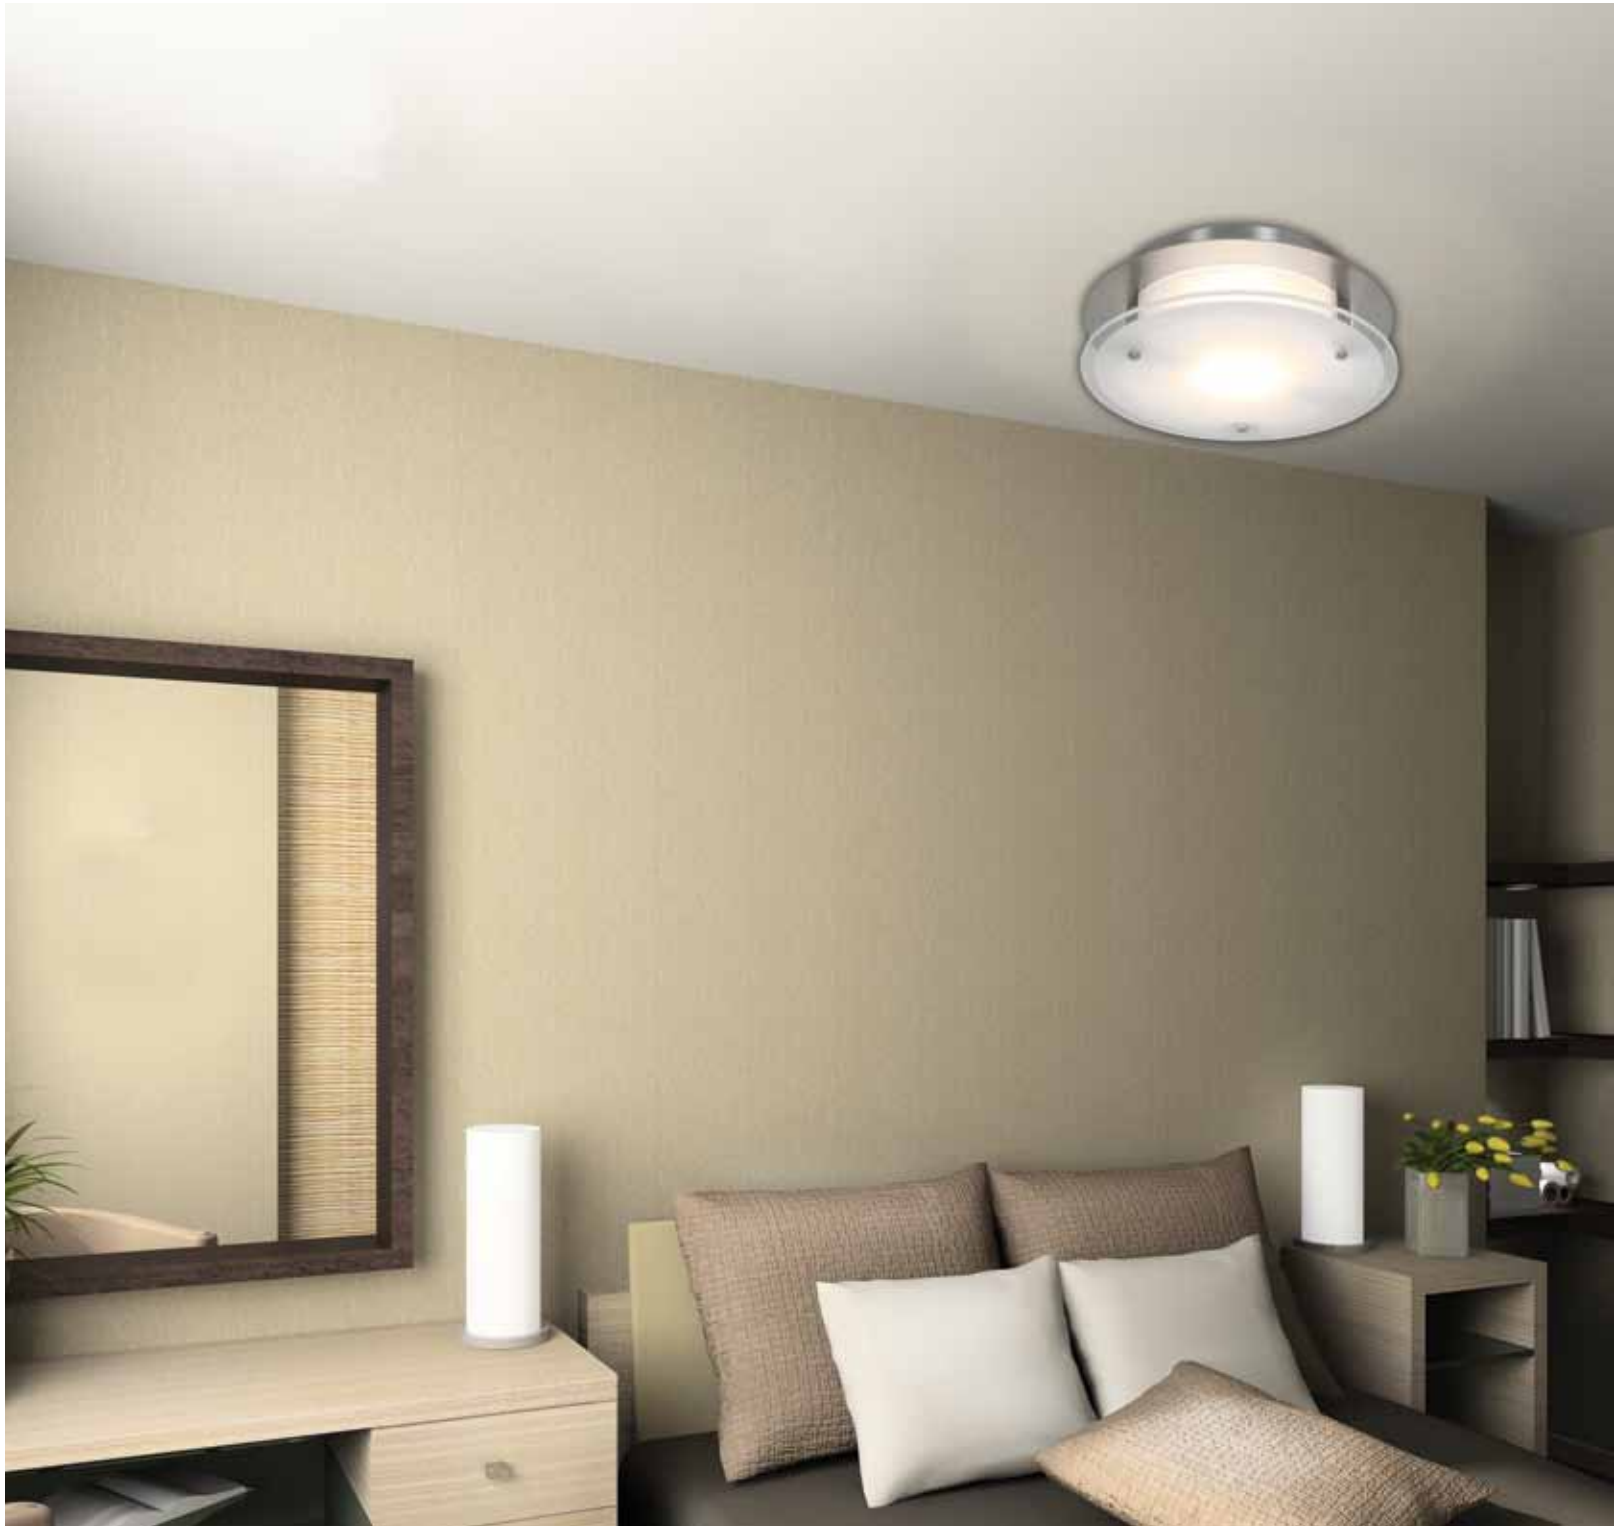



**Aztec** Flush-Mount

Finish BS	Glass WHT	Dimensions D 14" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20456GU-BS/WHT	2Lt x 13w	Spiral	GU-24		1800Lm	
C20456BSWHTEN1140C	1Lt x 40w	2CT6	G10q		2800Lm	
20456LED-BS/WHT	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

Certification Ceiling Damp CUL



**Aztec** Flush-Mount

Finish BS	Glass WHT	Dimensions D 17" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20457GU-BS/WHT	3Lt x 13w	Spiral	GU-24		2700Lm	
C20457BSWHTEN1140C	1Lt x 40w	2CT6	G10q		2800Lm	
20457LED-BS/WHT	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps

Certification Ceiling Damp CUL



**Aztec** Flush-mount, Dimmable LED option

Finish BS	Glass WHT	Dimensions D 21.5" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20458GU-BS/WHT	4Lt x 13w	Spiral	GU-24		3600Lm	
C20458BSWHTEN1158C	1Lt x 58w	2CT6	G10q		3700Lm	
20458LEDD-BS/WHT <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps

Certification Ceiling Damp CUL



**Saloris** Acrylic Flush-Mount


Finish BS	Diffuser ACR	Dimensions D 17" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20740-BS/ACR	22w+32w	T-9	G10q	3000k	3900Lm	Lamps
C20740BSACREN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20740LED-BS/ACR	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps

Certification Ceiling Damp CUL



20624-WH/OPL


**Cobalt** Flush-Mount

Finish BS ORB WH	Glass OPL	Dimensions D 11" H 3.6"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20624-___/OPL	1Lt x 100w	A-19	E-26			
20624GU-___/OPL	2Lt x 13w	Spiral	GU-24		1800Lm	
C20624__OPLN1213BS	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
20624LED-___/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps
<b>Certification</b> Ceiling Damp CUL 						



20625-BS/OPL


**Cobalt** Flush-Mount

Finish BS ORB WH	Glass OPL	Dimensions D 13" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20625-___/OPL	2Lt x 60w	A-19	E-26			
20625GU-___/OPL	2Lt x 13w	Spiral	GU-24		1800Lm	
C20625__OPLN1218BS	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20625LED-___/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps
<b>Certification</b> Ceiling Damp CUL 						




20626-ORB/OPL

**Saloris** Acrylic Flush-Mount, Dimmable LED option

Finish BS	Diffuser ACR	Dimensions D 23.25" H 5.25"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20741-BS/ACR	32w+40w	T-9	G10q	3000k	4600Lm	Lamps
C20741BSACREN1313B	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps
20741LEDD-BS/ACR <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification</b> Ceiling Damp CUL 						

**Cobalt** Flush-Mount, Dimmable LED option

Finish BS ORB WH	Glass OPL	Dimensions D 15" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20626-___/OPL	2Lt x 75w	A-19	E-26			
20626GU-___/OPL	3Lt x 13w	Spiral	GU-24		2700Lm	
C20626BSOPLN1218BS	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20626LEDD-___/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification</b> Ceiling Damp CUL 						





20650-BS/OPL





20651-ORB/OPL

### Strata Flush-Mount


Finish BS ORB	Glass OPL	Dimensions D 10" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20650-___/OPL	1Lt x 60w	A-19	E-26			
C20650___OPLN1113BS 	1Lt x 13w	A-19	GU-24	2700k	900Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						

### Strata Flush-Mount



Finish BS ORB	Glass OPL	Dimensions D 14" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20651-___/OPL	2Lt x 60w	A-19	E-26			
C20651___OPLN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20651LED-___/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						



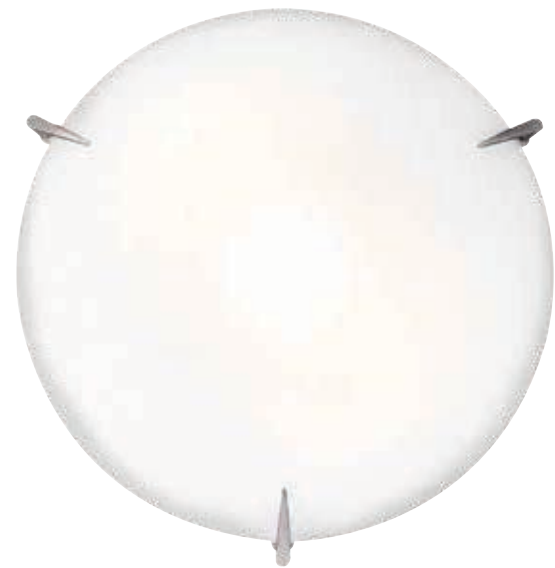

20652-BS/OPL



### Strata Flush-Mount, Dimmable LED option

Finish BS ORB	Glass OPL	Dimensions D 16" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20652-___/OPL	3Lt x 60w	A-19	E-26			
C20652___OPLN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20652LEDD-___/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						

### Xenon Flush-Mount

Finish BS	Glass OPL	Dimensions D 12" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20661-BS/OPL	2Lt x 60w	A-19	E-26			
20661GU-BS/OPL	2Lt x 13w	Spiral	GU-24		1800Lm	
C20661BSOPLN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
20661LED-BS/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						







20724-BS/OPL





20725-ORB/OPL

### Atom Flush-Mount



Finish BS ORB	Glass OPL	Dimensions D 10" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20724-_/OPL	1Lt x 100w	A-19	E-26	2700k		
C20724_OPLEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
20724LED-_/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						

### Atom Flush-Mount

Finish BS ORB	Glass OPL	Dimensions D 12" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20725-_/OPL	2Lt x 60w	A-19	E-26			
C20725_OPLEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20725LED-_/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						





### Xenon Flush-Mount

Finish BS	Glass OPL	Dimensions D 16" H 3.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20662-BS/OPL	3Lt x 60w	A-19	E-26			
20662GU-BS/OPL	3Lt x 13w	Spiral	GU-24		2700Lm	
C20662BSOPLEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
20662LEDD-BS/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						



20726-BS/OPL

### Atom Flush-Mount, Dimmable LED option

Finish BS ORB	Glass OPL	Dimensions D 14" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20726-_/OPL	3Lt x 60w	A-19	E-26			
C20726_OPLEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20726LEDD-_/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification Ceiling Damp CUL</b> 						



Pg 18

**Altum** OPL Glass Flushmount

Finish WH	Glass OPL	Dimensions D 10.25" H 3.1"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50186-WH/OPL	1Lt x 60w	A-19	E-26			
C50186WHOPLN1118B	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Lamps
50186LED-WH/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

**Certification** Ceiling Damp **CETL**



Pg 18

**Altum** OPL Glass Flushmount

Finish WH	Glass OPL	Dimensions D 12.5" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50187-WH/OPL	2Lt x 60w	A-19	E-26			
C50187WHOPLN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
50187LED-WH/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

**Certification** Ceiling Damp **CETL**



Pg 18

**Altum** OPL Glass Flushmount

Finish WH	Glass OPL	Dimensions D 15.75" H 3.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50188-WH/OPL	3Lt x 60w	A-19	E-26			
C50188WHOPLN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
50188LED-WH/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps

**Certification** Ceiling Damp **CETL**



Pg 18

**Altum** OPL Glass Flushmount

Finish WH	Glass OPL	Dimensions D 19.5" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50189-WH/OPL	3Lt x 60w	A-19	E-26			
C50189WHOPLN1313B	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps

**Certification** Ceiling Damp **CETL**



**Aero** Flush-Mount

Finish CH	Glass OPL	Dimensions D 10" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20670-CH/OPL	1Lt x 75w	A-19	E-26			
C20670CHOPLN1126B	1Lt x 26w	Spiral	GU-24	2700k	1710Lm	Lamps
20670LED-CH/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

**Certification** Ceiling Damp **CETL**



**Aero** Flush-Mount

Finish CH	Glass OPL	Dimensions D 12.5" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20671-CH/OPL	2Lt x 60w	A-19	E-26			
C20671CHOPLN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20671LED-CH/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps

**Certification** Ceiling Damp **CETL**



**Aero** Flush-Mount, Dimmable LED option

Finish CH	Glass OPL	Dimensions D 15.7" H 5.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20672-CH/OPL	3Lt x 60w	A-19	E-26			
C20672CHOPLN1218B	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
20672LEDD-CH/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps

**Certification** Ceiling Damp **CETL**




20745GU-WH/FST



20746GU-SAT/FST


**TomTom** Flush-Mount

Finish SAT WH	Glass FST	Dimensions D 8" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20745GU-___/FST	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps
C20745SATFSTEN1118Q	1Lt x 18w	Quad	GU-24		1250Lm	
20745LED-___/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

Certification Ceiling Damp **CETL** 

**TomTom** Flush-Mount

Finish SAT WH	Glass FST	Dimensions D 12" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20746GU-___/FST	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
C20746SATFSTEN1218Q	2Lt x 18w	Quad	GU-24		2500Lm	
20746LED-___/FST	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps


Certification Ceiling Damp **CETL** 



20747GU-SAT/FST

**TomTom** Flush-Mount. Dimmable LED option

Finish SAT WH	Glass FST	Dimensions D 16.5" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20747GU-___/FST	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps
C20747SATFSTEH3226Q	2Lt x 26w	Quad	GU-24		3420Lm	
20747LEDD-___/FST <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps

Certification Ceiling Damp **CETL** 




50079-BRZ/OPL




50080-BS/OPL

### Conga Flush-Mount

Finish BRZ BS	Glass OPL	Dimensions D 12" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50079-__/_OPL	1Lt x 100w	A-19	E-26			
C50079__OPLN1213BS	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps
50079LED-__/_OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						


### Conga Flush-Mount

Finish BRZ BS	Glass OPL	Dimensions D 16" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50080-__/_OPL	2Lt x 75w	A-19	E-26	2700k	1600Lm	Lamps
C50080__OPLN1218BS	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
50080LED-__/_OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						




50081-BRZ/OPL

### Conga Flush-Mount, Dimmable LED option

Finish BRZ BS	Glass OPL	Dimensions D 19" H 5.25"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50081-__/_OPL	3Lt x 75w	A-19	E-26	2700k	2400Lm	Lamps
C50081__OPLN1226BS	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	Lamps
50081LEDD-__/_OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						




### Vision Flush-Mount

Finish BS	Glass FST	Dimensions L 6" W 6" H 3.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50029-BS/FST	1Lt x 60w	JCD	G9	2900k	800Lm	Lamps	
<b>Certification</b> Ceiling Dry <b>CETL</b> 							




### Vision Flush-Mount

Finish BS	Glass FST	Dimensions L 9.5" W 9.5" H 3.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50030-BS/FST	1Lt x 200w	J-118	R7s	2900k	3200Lm	Lamps	
C50030BSFSTEH3213Q	2Lt x 13w	Quad	G24q-1		1800Lm		
50030LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							




### Vision Flush-Mount

Finish BS	Glass FST	Dimensions L 11.8" W 11.8" H 3.25" Canopy: L 7.1" W 6" H 1.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50031-BS/FST	1Lt x 200w	J-118	R7s	2900k	3200Lm	Lamps	
C50031BSFSTEH3218Q	2Lt x 18w	Quad	G24q-2		2500Lm		
50031LED-BS/FST	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							




### Vision Flush-Mount, Dimmable LED option

Finish BS	Glass FST	Dimensions L 15.75" W 15.75" H 3.25" Canopy: L 12" W 11.75" H 1.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50032-BS/FST	2Lt x 150w	J-118	R7s	2900k	5200Lm	Lamps	
C50032BSFSTEH3226Q	2Lt x 26w	Quad	G24q-3		3420Lm		
50032LEDD-BS/FST <b>Dimmable</b>	1Lt x 36w	LED	Module	3000k	4000Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							




**Vision** Flush-Mount

Finish BS	Glass FST	Dimensions L 11.8" W 6.75" H 3.25" Canopy: L 7.9" W 4.75" H 1.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50033-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps	
C50033BSFSTEH3118Q	1Lt x 18w	Quad	G24q-2		1250Lm		
50033LED-BS/FST	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b>							




**Vision** Flush-Mount

Finish BS	Glass FST	Dimensions L 10" W 15.5" H 3.25" Canopy: L 11.75" W 6" H 1.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50034-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps	
C50034BSFSTEH3218Q	2Lt x 18w	Quad	G24q-2		2500Lm		
50034LED-BS/FST	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b>							




**Vision** Flush-Mount, Dimmable LED option

Finish BS	Glass FST	Dimensions L 18" W 18" H 5.1" Canopy: L 13.5" W 13.5" H 2"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50035-BS/FST	2Lt x 150w	J-118	R7s	2900k	5200Lm	Lamps	
C50035BSFSTEH3226Q	2Lt x 26w	Quad	G24q-3		3420Lm		
50035LEDD-BS/FST	1Lt x 36w	LED	Module	3000k	4000Lm	Lamps	
<b>Certification</b> Ceiling Dry <b>CETL</b>							





**Ark** Fluorescent close to ceiling fixture with rear glass diffusers for back light projection

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 38.25" W 8" H 4.5" <b>Canopy</b> L 9.9" W 4.5" H 1.4"				
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
31026-BS/FST	2Lt x 39w	T-5 HO	Bi-Pin	3000k	6200Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						





**Vision** Fluorescent ceiling or wall fixture

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 26.5" W 4.5" H 4" <b>Canopy</b> L 22.9" W 4.4" H 1.4"				
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
31027-BS/FST	1Lt x 24w	T-5 HO	Bi-Pin	3000k	1750Lm	Lamps
<b>Certification</b> Ceiling Wall Damp <b>CETL</b>  						





**Vision** Fluorescent ceiling or wall fixture

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 38.25" W 5.25" H 4" <b>Canopy</b> L 34.6" W 4.25" H 1.4"				
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
31029-BS/FST	1Lt x 39w	T-5 HO	Bi-Pin	3000k	3100Lm	Lamps
<b>Certification</b> Ceiling Wall Damp <b>CETL</b>  						







**Vision** Fluorescent ceiling or wall fixture

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 26.5" W 9.5" H 4" <b>Canopy:</b> L 22.9" W 4.4" H 1.4"				
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
31028-BS/FST	2Lt x 24w	T-5 HO	Bi-Pin	3000k	3500Lm	Lamps
<b>Certification</b> Ceiling Wall Damp CETL						




**Vision** Fluorescent ceiling or wall fixture

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 38.25" W 9.9" H 4" <b>Canopy:</b> L 34.6" W 6.75" H 1.4"				
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
31030-BS/FST	2Lt x 39w	T-5 HO	Bi-Pin	3000k	6200Lm	Lamps
<b>Certification</b> Ceiling Wall Damp CETL						



### VisionRound Ceiling & Wall


Finish BS	Glass FST	Dimensions D 10" H 3.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50036-BS/FST	1Lt x 150w	J-78	R7s	2900k	2600Lm	Lamps	
50036LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps	

Certification Ceiling Damp CETL 



### VisionRound Ceiling & Wall


Finish BS	Glass FST	Dimensions D 12" H 3.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50037-BS/FST	1Lt x 200w	J-118	R7s	2900k	3200Lm	Lamps	
50037LED-BS/FST	1Lt x 13w	LED	R7s	3000k	1520Lm	Lamps	

Certification Ceiling Damp CETL 




### VisionRound Ceiling & Wall, Dimmable LED option


Finish BS	Glass FST	Dimensions D 14" H 3.25"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50038-BS/FST	2Lt x 150w	J-78	R7s	2900k	5200Lm	Lamps	
50038LEDD-BS/FST <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps	

Certification Ceiling Damp CETL 



### Iron Flush-Mount

Finish BS	Glass FST	Dimensions D 12" H 4"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50130-BS/FST	1Lt x 100w	A-19	E-26				
C50130BSFSTEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps	
50130LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps	



Certification Ceiling Damp CETL 



Pg 28



### Saturn Flush-Mount



Finish BS	Glass FST	Dimensions D 9.5" H 4.5"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50091-BS/FST	1Lt x 75w	JCD	G9	2900k	1050Lm	Lamps	
C50091BSFSTEN1113BS 	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps	
50091LED	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							



Pg 28



### Saturn Flush-Mount



Finish BS	Glass FST	Dimensions D 14.5" H 5.5"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50092-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps	
C50092BSFSTEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps	
50092LED-BS/FST	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							



Pg 26



### Iron Flush-Mount



Finish BS	Glass FST	Dimensions D 16" H 4"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50131-BS/FST	2Lt x 75w	A-19	E-26				
C50131BSFSTEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps	
50131LED-BS/FST	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							



Pg 28




### Saturn Flush-Mount, Dimmable LED option

Finish BS	Glass FST	Dimensions D 19" H 5.5"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50093-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps	
C50093BSFSTEN1313BS 	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps	
50093LEDD-BS/FST <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps	
<b>Certification</b> Ceiling Damp <b>CETL</b> 							




### Carbon Flush-Mount

Finish BS	Glass OPL	Dimensions L 12" W 12" H 2.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50058-BS/OPL	1Lt x 100w	J-118	R7s	2900k	1650Lm	Lamps
C50058BSOPLN1213Q	2Lt x 13w	Quad	G24q-1		1800Lm	

Certification Ceiling Damp CETL 

### Carbon Flush-Mount


Finish BS	Glass OPL	Dimensions L 16" W 16" H 2.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50059-BS/OPL	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50059BSOPLH3218Q	2Lt x 18w	Quad	G24q-2		2500Lm	

Certification Ceiling Damp CETL 




### Lithium Flush-Mount

Finish BS	Glass OPL	Dimensions D 12" H 3.25"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50056-BS/OPL	1Lt x 100w	J-118	R7s	2900k	1650Lm	Lamps

Certification Ceiling Damp CETL 

### Lithium Flush-Mount


Finish BS	Glass OPL	Dimensions D 16" H 3.25"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50057-BS/OPL	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps

Certification Ceiling Damp CETL 



### Triton Flush-Mount


Finish BS		Glass FST		Dimensions D 9.5" H 4"			
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50071-BS/FST	1Lt x 100w	J-78	R7s	2900k	1650Lm	Lamps	
C50071BSFSTEN1113BS	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps	

Certification Ceiling Damp CETL 



### Triton Flush-Mount


Finish BS		Glass FST		Dimensions D 13.5" H 4.5"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included			
50072-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps			
C50072BSFSTEN1213BS	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps			

Certification Ceiling Damp CETL 



### Lithium Flush-Mount


Finish BS		Glass FST		Dimensions L 12" W 12" H 3"			
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50127 BS/FST	1Lt x 100w	J-118	R7s	2900k	1650Lm	Lamps	

Certification Ceiling Damp CETL 



### Triton Flush-Mount



Finish BS		Glass FST		Dimensions D 19" H 4.75"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included			
50073-BS/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps			
C50073BSFSTEN1313BS	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps			

Certification Ceiling Damp CETL 



Pg 14



**Leilah** Scalloped glass flush-mount

Finish BS	Glass WH	Dimensions D 17.25" H 6.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50956-BS/WH	2Lt x 60w	A-19	E-26			
C50956BSWHEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps
<b>Certification</b> Ceiling Dry <b>CETL</b>  LISTED						



Pg 14

**Leilah** Scalloped glass flush-mount

Finish BS	Glass WH	Dimensions D 21.4" H 7.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50957-BS/WH	4Lt x 60w	A-19	E-26			
C50957BSWHEN1413BS 	4Lt x 13w	Spiral	GU-24	2700k	3600Lm	Lamps
<b>Certification</b> Ceiling Dry <b>CETL</b>  LISTED						




23764 -RIC



Pg 76

**SoHo** Indirect light flush-mount

Finish BSL RIC	Dimensions D 18.75" H 10.5"		
Model	Wattage	Type	Base
23764-__	3Lt x 60w	A-19	E-26
<b>Certification</b> Ceiling Dry <b>CETL</b>  LISTED			



23764 -BSL



Pg 10



**Tara** Flush-Mount

Finish BS	Glass OPL	Dimensions D 14" H 4.75"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50120-BS/OPL	3Lt x 60w	A-19	E-26				
C50120BSOPLN1218BS	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps	

Certification Ceiling Damp CETL



Pg 10



**Tara** Flush-Mount

Finish BS	Glass OPL	Dimensions D 18" H 4.75"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50121-BS/OPL	3Lt x 75w	A-19	E-26				
C50121BSOPLN1226BS	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	Lamps	

Certification Ceiling Damp CETL



Pg 135



**Sol** Glass dome flush-mount

Finish CH	Glass CLR	Dimensions D 16" H 6"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
55501-CH/CLR	8Lt x 10w	Bi-Pin	G4	2900k	960Lm	Lamps	

Certification Ceiling Damp CETL



Pg 135



**Sol** Glass dome flush-mount

Finish CH	Glass CLR	Dimensions D 20" H 6"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
55502-CH/CLR	10Lt x 10w	Bi-Pin	G4	2900k	1200Lm	Lamps	

Certification Ceiling Damp CETL



Pg 20



**Orion** OPL glass flush-mount

Finish WH	Glass OPL	Dimensions D 10.75" H 3.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50160-WH/OPL	2Lt x 60w	A-19	E-26			
C50160WHOPLN1118BQ	1Lt x 18w	Quad	GU-24		1250Lm	
50160LED-WH/OPL	1Lt x 10.8w	LED	Module	3000k	1265Lm	Lamps

Certification Ceiling Damp **CETL** 



Pg 20



**Orion** OPL glass flush-mount

Finish WH	Glass OPL	Dimensions D 13.25" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50161-WH/OPL	3Lt x 60w	A-19	E-26			
C50161WHOPLN1218BQ	2Lt x 18w	Quad	GU-24		1250Lm	
50161LED-WH/OPL	1Lt x 13w	LED	Module	3000k	1520Lm	Lamps

Certification Ceiling Damp **CETL** 




Pg 20




**Orion** OPL glass flush-mount, dimmable LED option

Finish WH	Glass OPL	Dimensions D 19" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50162-WH/OPL	3Lt x 60w	A-19	E-26			
C50162WHOPLN1218BQ	1Lt x 18w	Quad	GU-24		1250Lm	
50162LEDD-WH/OPL <b>Dimmable</b>	1Lt x 24w	LED	Module	3000k	2790Lm	Lamps

Certification Ceiling Damp **CETL** 



**Vega** Flush-Mount

Finish WH	Glass OPL	Dimensions L 8" W 8" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20656-WH/OPL	1Lt x 100w	A-19	E-26			
C20656WHOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Lamps


Certification Ceiling Damp **CUL** 






### Luna Flush-Mount


Finish BS	Glass WHT	Dimensions D 13.5" H 3"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50069-BS/WHT	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50069BSWHTEN1213BQ	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps

Certification Ceiling Damp CETL 




### Luna Flush-Mount


Finish BS	Glass WHT	Dimensions D 17.25" H 4.3"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50070-BS/WHT	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50070BSWHTEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps

Certification Ceiling Damp CETL 




### Vega Flush-Mount


Finish WH	Glass OPL	Dimensions L 11" W 11" H 5.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20657-WH/OPL	2Lt x 60w	A-19	E-26			
C20657WHOPLN1118BS 	1Lt x 18w	Spiral	GU-24	2700k	1250Lm	Lamps

Certification Ceiling Damp CUL 



### Vega Flush-Mount

Finish WH	Glass OPL	Dimensions L 14" W 14" H 6.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
20658-WH/OPL	3Lt x 60w	A-19	E-26			
C20658WHOPLN1126BS 	1Lt x 26w	Spiral	GU-24	2700k	1710Lm	Lamps

Certification Ceiling Damp CUL 



23019-BS/ALB



23020-CH/WH

### Mona Flush-Mount

Finish BS CH RU WH	Glass ALB WH	Dimensions D 12" H 3.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23019-_/__	2Lt x 60w	B-10	E-12			
23019GU-_/__	2Lt x 13w	Spiral	GU-24		1800Lm	
C23019___---EN1213BS	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps

Certification Ceiling Damp CUL

### Mona Flush-Mount

Finish BS CH RU WH	Glass ALB WH	Dimensions D 16" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23020-_/__	3Lt x 60w	A-19	E-26			
23020GU-_/__	2Lt x 13w	Spiral	GU-24		1800Lm	
C23020___---EN1226BS	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	Lamps

Certification Ceiling Damp CUL



23021-BS/ALB

### Mona Flush-Mount


Finish BS CH RU WH	Glass ALB WH	Dimensions D 20" H 5.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23021-_/__	4Lt x 60w	A-19	E-26			
23021GU-_/__	3Lt x 13w	Spiral	GU-24		2700Lm	
C23021___---EN1226BS	2Lt x 26w	Spiral	GU-24	2700k	3420Lm	Lamps

Certification Ceiling Damp CUL






### Linen Flush-Mount

Finish BS Glass TEX		Dimensions D 12" H 4.5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23022-BS/TEX	2Lt x 60w	A-19	E-26			
C23022BSTEMEN1213BS 	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps

Certification Ceiling Damp CETL 




### Linen Flush-Mount


Finish BS Glass TEX		Dimensions D 15" H 4.75"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23023-BS/TEX	3Lt x 60w	A-19	E-26			
C23023BSTEMEN1218BS 	2Lt x 18w	Spiral	GU-24	2700k	2500Lm	Lamps

Certification Ceiling Damp CETL 



### Linen Flush-Mount

Finish BS Glass TEX		Dimensions D 20" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
23024-BS/TEX	4Lt x 60w	A-19	E-26			
C23024BSTEMEN1318BS 	3Lt x 18w	Spiral	GU-24	2700k	3750Lm	Lamps


Certification Ceiling Damp CETL 




50020-CH/FST

**Nimbus** Flush-Mount

Finish CH SAT WH	Glass FST	Dimensions D 8.25" H 3.25"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50020-___/FST	1Lt x 75w	J-78	R7s	2900k	1050Lm	Lamps


Certification Ceiling Damp CETL 



50041-SAT/FST

**Nimbus** Flush-Mount

Finish CH SAT WH	Glass FST	Dimensions D 12.5" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50041-___/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50041___FSTEN1213BS	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps

Certification Ceiling Damp CETL 



50046-CH/ALB

**Nimbus** Flush-Mount

Finish CH SAT WH	Glass ALB	Dimensions D 12.5" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50046-___/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps

C50046___ALBEN1113BS	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps
----------------------	-----------	--------	-------	-------	-------	-------


Certification Ceiling Damp CETL 



50049-WH/FST

**Nimbus** Flush-Mount


Finish CH SAT WH	Glass FST	Dimensions D 16" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50049-___/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50049___FSTEN1313BS	2Lt x 13w	Spiral	GU-24	2700k	1800Lm	Lamps

Certification Ceiling Damp CETL 




50050-SAT/ALB

**Nimbus** Flush-Mount

Finish CH SAT WH	Glass ALB	Dimensions D 16.25" H 5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
50050-_/FST	1Lt x 150w	R7s	J-118	2900k	2600Lm	Lamps
C50050__ALBEN1313BS	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						




**Cirrus** Flush-Mount

Finish SAT	Glass FST	Dimensions D 8.25" H 3"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50060-SAT/FST	1Lt x 75w	J-78	R7s	2900k	1050Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						




**Cirrus** Flush-Mount

Finish SAT	Glass FST	Dimensions D 12.25" H 4"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50061-SAT/FST	1Lt x 150w	J-118	R7s	2900k	2600Lm	Lamps
C50061SATFSTEN1113BS	1Lt x 13w	Spiral	GU-24	2700k	900Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						



**Cirrus** Flush-Mount

Finish SAT	Glass FST	Dimensions D 16" H 5"				
Model	Wattage	Type	Base	Kelvin	Lumen	Included
50063-SAT/FST	1Lt x 200w	J-118	R7s	2900k	3200Lm	Lamps
C50063SATFSTEN1313BS	3Lt x 13w	Spiral	GU-24	2700k	2700Lm	Lamps
<b>Certification</b> Ceiling Damp <b>CETL</b> 						



20742-BS



20742-WH

see Pg 281 for additional lamping specifications

**Ares** Dimmable flush-mount or wall mount

Finish BS WH	Lens FST	Dimensions D 5" H 3"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
20742-__	<b>Dimmable</b> 1Lt x 18w	CCFL	GX-53	2700k	800Lm	Lamps	
20742LED-__	<b>Dimmable</b> 1Lt x 13w	LED	GX-53	3000k	1200Lm	Lamps	

**Certification** Ceiling Damp **CETL**



**Helius** Flush-Mount

Finish BS	Glass CFR	Dimensions D 12" H 4"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
50480-BS/CFR	1Lt x 150w	J-78	R7s	2900k	2600Lm	Lamps	
50480LED-BS/CFR	<b>Dimmable</b> 1Lt x 13w	LED	GX-53	3000k	1200Lm	Lamps	

**Certification** Ceiling Damp **CETL**



63951-MC/FST



63951-ORB/FST



**Nido** Wall or ceiling fixture

Finish MC ORB	Glass FST	Dimensions L 14.25" W 14.25" H 3.75"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
63951-__/_FST	1Lt x 100w	J-78	R7s	2900k	1650Lm	Lamps	

**Certification** Ceiling Dry **CETL**



63953-MC/FST



63953-ORB/FST



**Nido** Wall or ceiling fixture

Finish MC ORB	Glass FST	Dimensions L 14.25" W 14.25" H 3.75"					
Model	Wattage	Type	Base	Kelvin	Lumen	Included	
63953-__/_FST	3Lt x 100w	J-78	R7s	2900k	4950Lm	Lamps	

**Certification** Ceiling Dry **CETL**

# Wall Fixtures





50566-BS/OPL

50566-ORB/OPL

**Aqueous** Wall and Vanity Fixture

Finish	BS ORB	Glass OPL	Dimensions				Back-Plate					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	L	H	Ext	L	W	H
50566-___/OPL	1Lt x 18w	2G11	FT18DL	3000k	1200Lm	Lamps	4.3"	11.25"	5.9"	5.9"	4.25"	1.75"

Certification Wall Damp Location Location **CETL** 



50567-BS/OPL

50567-ORB/OPL

**Aqueous** Wall and Vanity Fixture

Finish	BS ORB	Glass OPL	Dimensions				Back-Plate					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	L	H	Ext	L	W	H
50567-___/OPL	2Lt x 18w	2G11	FT18DL	3000k	2400Lm	Lamps	4.3"	22"	5.9"	5.9"	4.25"	1.75"

Certification Wall Damp Location **CETL** 



**Aqueous** Wall and Vanity Fixture

Finish	BS	Glass OPL	Dimensions				Back-Plate					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	L	H	Ext	L	W	H
70032LED-BS/OPL	1Lt x 8w	Module	LED	3000k	558Lm	Lamps	8"	11.25"	4.5"	6"	4.2"	1.4"

Certification Wall Damp Location **CETL** 



**Aqueous** Wall and Vanity Fixture

Finish	BS	Glass OPL	Dimensions				Back-Plate					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	L	H	Ext	L	W	H
70033LED-BS/OPL	2Lt x 8w	Module	LED	3000k	1116Lm	Lamps	8"	21.1"	4.5"	6"	4.2"	1.4"

Certification Wall Damp Location **CETL** 





**Aqueous** Wall and Vanity Fixture



Finish BS	Glass OPL	Dimensions L 4.75" H 12" Ext 4" Back-Plate: D 5" H 0.88"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
20441-BS/OPL	1Lt x 60w	E-26	B-10				
C20441BSOPLN1113BS	1Lt x 13w	GU-24	Spiral	2700k	900Lm	Lamps	

Certification Wall Damp Location CETL  



**Aqueous** Wall and Vanity Fixture

Finish BS	Glass OPL	Dimensions L 12.25" H 12" Ext 4" Back-Plate: D 5" H 0.88"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
20442-BS/OPL	2Lt x 60w	E-26	A-19				
C20422BSOPLN1213BS	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps	

Certification Wall Damp Location CETL  





20435-BS/OPL



20435-ORB/OPL

**Cobalt** Wall and Vanity Fixture

Finish BS	ORB	Glass OPL	Dimensions L 5" H 12.5" Ext 4" Back-Plate: D 5" H .75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
20435-BS ORB/OPL	1Lt x 60w	E-26	B-10				
C20435__OPLN1113B	1Lt x 13w	GU-24	Spiral	2700k	900Lm	Lamps	

Certification Wall Damp Location CUL  





20436-BS/OPL



20436-ORB/OPL

**Cobalt** Wall and Vanity Fixture

Finish BS	ORB	Glass OPL	Dimensions L 5" H 18.5" Ext 4" Back-Plate: D 5" H .75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
20436-BS ORB/OPL	2Lt x 60w	E-26	B-10				
C20436__OPLN1213B	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps	

Certification Wall Damp Location CUL  



**Lynx** Wall Fixture

<b>Finish</b> BS	<b>Glass</b> OPL	<b>Dimensions</b> L 4.25" H 10.5" Ext 4.75" <b>Back-Plate:</b> D 4.75" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50560-BS/OPL	1Lt x 40w	G9	G9 Hgn	2900k	380Lm	Lamps

Certification Wall Dry Location **CETL** 



**Lynx** Wall & Vanity

<b>Finish</b> BS	<b>Glass</b> OPL	<b>Dimensions</b> L 4.5" H 16" Ext 4" <b>Back-Plate:</b> D 4.75" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50564-BS/OPL	2Lt x 40w	G9	G9 Hgn	2900k	760Lm	Lamps

Certification Wall Dry Location **CETL** 



**Proteus** Wall Fixture with On/Off Pull Cord

<b>Finish</b> CH	<b>Glass</b> CLOP	<b>Dimensions</b> L 4.75" H 12" Ext 4.6" <b>Back-Plate:</b> D 4.75" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50561-CH/CLOP	1Lt x 60w	E-12	B-10			

Certification Wall Dry Location **CETL** 



**Proteus** Wall Fixture

<b>Finish</b> BS	<b>Glass</b> FRC	<b>Dimensions</b> L 5" H 9" Ext 5.25" <b>Back-Plate:</b> D 4.9" H 1.25"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50505-BS/FRC	1Lt x 60w	E-12	B-10			

Certification Wall Dry Location **CETL** 



**Oracle** Wall & Vanity

Finish BS	Glass OPL	Dimensions L 4.25" H 11.75" Ext 3.75" Canopy: L 4.4" W 4.4" H .75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
50565-BS/OPL	1Lt x 60w	E-12	B-10			

Certification Wall Damp CETL  



**Gyro Cylindrical glass** Wall fixture

Finish BS	Glass CLOP	Dimensions D 4.4" H 14.75" Ext 5.5" Back-Plate: D 4" H .9"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
52063-BS/CLOP	2Lt x 60w	G9	G9 Hgn	2900k	1600Lm	Lamps

Certification Wall Dry Location CETL 





50562-BS/OPL  
shown with optional extra  
SCR-50

Pg 27



**Iron** Wall Fixture with On/Off Switch, optional Mesh Sleeve SCR-50

Finish BS	Glass OPL	Dimensions L 4.3" H 14.5" Ext 4" Back-Plate: L 11.5" W 4.25" H .9"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
50562-BS/OPL	1Lt x 60w	E-26	A-19			
C50562BSOPLN1113BS	1Lt x 13w	GU-24	Spiral	2700k	900Lm	Lamps

Certification Wall Damp CETL  







A 62104-BS/OPL



B 62105-BS/OPL

**Argon Clean contemporary bent opal glass in a brushed steel frame**

Finish BS	Glass OPL	Certification	Wall Damp	Location	CETL	 		
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included
62104-BS/OPL	1Lt x 100w	R7s	J-78	2900k	1650Lm	L 12" H 5.25" Ext 3.25"	L 9.88" W 4.25" H 1"	Lamps
A 62104BSOPLN1113BS	 1Lt x 13w	GU-24	Spiral	2700k	900Lm	L 12" H 5.25" Ext 3.25"	L 9.88" W 4.25" H 1"	Lamps
62104LED-BS/OPL	1Lt x 10.8w	Module	LED	3000k	1265Lm	L 12" H 5.25" Ext 3.25"	L 9.88" W 4.25" H 1"	Lamps
62105-BS/OPL	2Lt x 100w	R7s	J-78	2900k	3300Lm	L 22.5" H 5.25" Ext 3.5"	L 19.75" W 4.25" H 1"	Lamps
B 62105BSOPLN1226BS	 2Lt x 26w	GU-24	Spiral	2700k	3420Lm	L 22.5" H 5.25" Ext 3.5"	L 19.75" W 4.25" H 1"	Lamps
62105LED-BS/OPL	1Lt x 13w	Module	LED	3000k	1520Lm	L 22.5" H 5.25" Ext 3.5"	L 19.75" W 4.25" H 1"	Lamps



C 62232-BS/LFR




B 62230-BS/LFR



A 62229-BS/LFR



**Neon Wall or vanity with bent line frosted glass with brushed steel clasps**

Finish BS	Glass LFR	Certification	Wall Damp	Location	CETL				
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Back-Plate	Included	
A	62229-BS/LFR	1Lt x 150w	R7s	J-118	2900k	2600Lm	L 12" H 12" Ext 4.5"	L 7.1" W 11.1" H 1.4"	Lamps
	C62229BSLFREN1218B	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	L 12" H 12" Ext 4.5"	L 7.1" W 11.1" H 1.4"	Lamps
B	62230-BS/LFR	1Lt x 150w	R7s	J-118	2900k	2600Lm	L 8" H 16" Ext 4.5"	L 4.75" W 15" H 1.4"	Lamps
	C62230BSLFREN1218B	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	L 8" H 16" Ext 4.5"	L 4.75" W 15" H 1.4"	Lamps
C	62232-BS/LFR	1Lt x 150w	R7s	J-118	2900k	2600Lm	L 16" H 16" Ext 4.5"	L 10.5" W 15" H 1.4"	Lamps
	C62232BSLFREN1213BS	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	L 16" H 16" Ext 4.5"	L 10.5" W 15" H 1.4"	Lamps



A 50182-BS/OPL



C 50184-BS/OPL




B 50183-BS/OPL



D 50185-BS/OPL

**Tabo Opal glass cylinders supported by a brushed steel frame**

Finish BS	Glass OPL	Certification	Wall Damp	Location	CETL	
Model	Wattage	Type	Base	Dimensions	Back-Plate	
A	50182-BS/OPL	1Lt x 60w	E-12	B-10	L 4.9" H 7.25" Ext 5.9"	L 9.88" W 4.25" H 1"
B	50183-BS/OPL	2Lt x 60w	E-12	B-10	L 4.9" H 11.8" Ext 5.9"	L 9.88" W 4.25" H 1"
C	50184-BS/OPL	2Lt x 60w	E-12	B-10	L 4.9" H 15.5" Ext 5.9"	L 9.88" W 4.25" H 1"
D	50185-BS/OPL	2Lt x 60w	E-12	B-10	L 4.9" H 19.5" Ext 5.9"	L 19.75" W 4.25" H 1"



**Helius** Wall Sconce

<b>Finish</b> BS	<b>Glass</b> FST	<b>Dimensions</b> L 6.25" H 5" Ext 5" <b>Back-Plate:</b> D 5" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
62084-BS/FST	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps

Certification Wall Dry Location **CETL** 





Pg 34



**Phoebe** Panel Glass Wall Fixture

<b>Finish</b> CH	<b>Glass</b> 8CL	<b>Dimensions</b> L 5.5" H 12" Ext 3.25" <b>Back-Plate:</b> L 5.6" W 4.75" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50550-CH/8CL	2Lt x 40w	G9	G9 Hgn	2900k	760Lm	Lamps

Certification Wall Dry Location **CETL**  




Pg 34



**Phoebe** Wall Fixture

<b>Finish</b> CH	<b>Glass</b> 8CL	<b>Dimensions</b> L 6.5" H 12" Ext 6" <b>Back-Plate:</b> D 5.5" H .25"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50511-CH/8CL	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps

Certification Wall Dry Location **CETL** 




Pg 24



**Helius** Wall Sconce

<b>Finish</b> BS	<b>Glass</b> CFR	<b>Dimensions</b> L 12" H 4.5" Ext 6.75" <b>Back-Plate:</b> L 9.75" W 4.25" H .75"				
<b>Model</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>
50483-BS/CFR	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps

Certification Wall Dry Location **CETL** 




20417-BS/ALB



20417-ORB/ALB

### Mona Wall Sconce

Finish BS ORB Glass ALB	Dimensions L 12" H 6" Ext 3.5" Canopy: L 9.6" W 4.75" H .9"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20417-___/ALB	1Lt x 60w	E-26	A-19			
C20417___ALBEN1118BS 	1Lt x 18w	GU-24	Spiral	2700k	1250Lm	Lamps

Certification Wall Dry Location CUL  



20414-SAT/FST



20414-RU/FST

### Thebes Wall Sconce

Finish RU SAT Glass FST	Dimensions L 16.5" H 4" Ext 4.5" Canopy: L 15.75" W 4" H .9"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20414-RU SAT/FST	1Lt x 150w	R7s	J-78	2900k	2600Lm	Lamps

Certification Wall Dry Location CETL 




20635-SAT/ALB



20635-ORB/ALB


### Crest Wall Sconce

Finish ORB SAT Glass ALB	Dimensions L 13" H 6.5" Ext 4" Canopy: L 6.4" W 13" H 0.4"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20635-ORB SAT/ALB	2Lt x 60w	E-26	A-19			
C20635___ALBEN1118BS 	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
20635LED-___/ALB	1Lt x 10.8w	Module	LED	3000k	1265Lm	Lamps

Certification Wall Dry Location CUL  



### Zenon Wall Sconce

Finish BS Glass OPL	Dimensions L 12.5" H 5.6" Ext 3.3" Canopy: L 7.5" W 3.5" H 1.5"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20660-BS/OPL	1Lt x 60w	E-26	A-19			
C20660BSOPLN1118BS 	1Lt x 18w	GU-24	Spiral	2700k	1250Lm	Lamps

Certification Wall Dry Location CUL  





**Titan** Wall & Vanity

Finish	BS	Glass	OPL	Dimensions			
				L 4.4"	H 7.2"	Ext 3.2"	Canopy: L 5.2" W 4.2" H .75"
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
62106-BS/OPL	1Lt x 40w	G9	G9 Hgn	2900k	380Lm	Lamps	

Certification Wall Damp Location **CETL**



23970-CH/WHT

**Pearl** Wall Fixture

Finish	BS	CH	Glass	AMB	WHT	Dimensions			
						L 6"	H 12"	Ext 6"	Canopy: L 6" W 5.88" H .6"
Model	Wattage	Base	Type	Kelvin	Lumen	Included			
23970-__/_/___	1Lt x 60w	E-26	A-19						
C23970	EN1118BS			2700k	1250Lm	Lamps			

Certification Wall Dry Location **CUL**



**Milano** Chromed glass wall fixture, included with Xenon 48w high lumen lamps, equivalent to 60w traditional halogen lamps

Finish	CH	Glass	CHR	Dimensions			
				L 6"	H 8.75"	Ext 8.5"	Canopy: D 4.75" H .9"
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
55530-CH/CHR	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps	

Certification Wall Damp Location **CETL**



**Milano** Chromed glass wall fixture, included with Xenon 48w high lumen lamps, equivalent to 60w traditional halogen lamps

Finish	CH	Glass	CHR	Dimensions			
				L 12"	H 8.75"	Ext 8.5"	Canopy: D 4.75" H .9"
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
55531-CH/CHR	2Lt x 60w	G9	G9 Hgn	2900k	1600Lm	Lamps	

Certification Wall Damp Location **CETL**





**Krypton** Wall Fixture

Finish BS	Glass OPL	Dimensions L 12" H 12" Ext 3.5" Canopy: L 15.6" W 7.6" H .25"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
53340-BS/OPL	2Lt x 60w	E-26	A-19			
C53340BSOPLN1226B	2Lt x 26w	GU-24	Spiral	2700k	3420Lm	Lamps


Certification Wall Damp Location CETL  



**Krypton** Wall Fixture



Finish BS	Glass OPL	Dimensions L 8.25" H 16" Ext 3" Canopy: L 15.6" W 7.6" H .25"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
53341-BS/OPL	2Lt x 60w	E-26	A-19	2700k	1640Lm	
C53341BSOPLN1226B	2Lt x 26w	GU-24	Spiral	2700k	3420Lm	Lamps

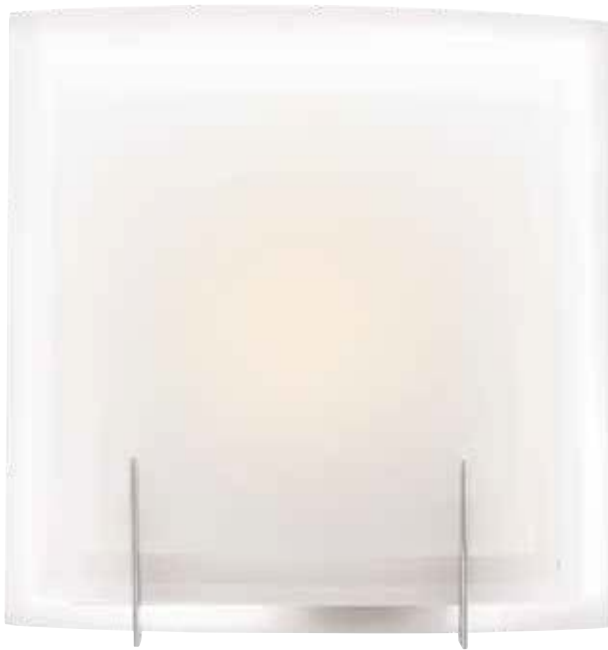Certification Wall Damp Location CETL  



**Nitrous** Wall and vanity fixture

Finish BS	Glass FST	Dimensions L 12" H 12" Ext 3.5" Canopy: L 9.1" W 10" H 0.88"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62215-BS/FST	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps
C62215BSFSTEH3126Q	1Lt x 26w	G24q-3	Quad		1710Lm	


Certification Wall Damp Location CETL  



**Nitrous** Wall and vanity fixture

Finish BS	Glass FST	Dimensions L 11" H 6.4" Ext 3.4" Canopy: L 7.2" W 5" H .75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62216-BS/FST	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps

Certification Wall Damp Location CETL  

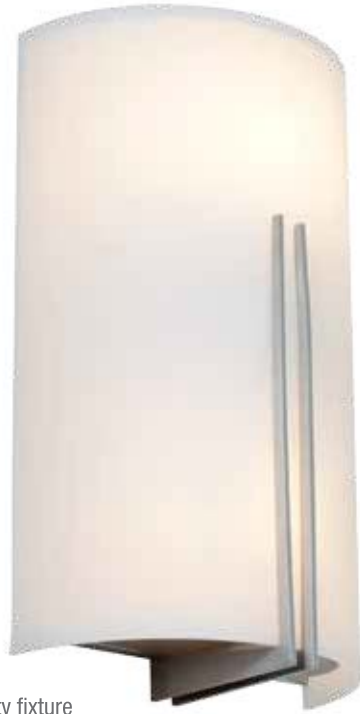

**Prong** Wall and vanity fixture

Finish BS	Glass WHT	Dimensions L 7.1" H 12.5" Ext 3.75" Canopy: L 11.25" W 6.75" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20446-BS/WHT	2Lt x 60w	E-26	A-19			
C20446BSWHTEN1218B	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps

Certification Wall Damp Location CUL  



**Prong** Wall and vanity fixture

Finish BS	Glass WHT	Dimensions L 12" H 7.1" Ext 4" Canopy: L 6.75" W 11.25" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20447-BS/WHT	2Lt x 60w	E-26	A-19			
C20447BSWHTEN1218B	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
20447LED-BS/WHT	1Lt x 10.8w	Module	LED	3000k	1265Lm	Lamps

Certification Wall Damp Location CUL  



**Artemis** Wall and vanity fixture

Finish BS	Glass OPL	Dimensions L 12.25" H 12" Ext 4" Canopy: L 12.1" W 12.4" H 0.6"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20422-BS/OPL	2Lt x 60w	E-12	B-10			
C20422BSOPLN1213B	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps

Certification Wall Dry Location CETL  



**Cobalt** Wall and vanity fixture

Finish BS	Glass OPL	Dimensions L 12.5" H 7" Ext 4" Canopy: L 9.4" W 8.4" H 0.5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20445-BS/OPL	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps
C20445BSOPLN1218BS	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps

Certification Wall Damp Location CUL  



**Artemis** Wall Fixture

Finish BS	Glass OPL	Dimensions L 10" H 11" Ext 4" Canopy: L 11" W 10" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20439-BS/OPL	2Lt x 60w	E-26	B-10			
C20439BSOPLN1218BS	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
20439LED-BS/OPL	1Lt x 4w	Module	LED	2800k	322Lm	Lamps

Certification Wall Damp Location CUL



**Artemis** Wall Fixture

Finish BS	Glass OPL	Dimensions L 10" H 11" Ext 4" Canopy: L 11" W 10" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20440-BS/OPL	2Lt x 60w	E-26	B-10			
C20440BSOPLN1218BS	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
20440LED-BS/OPL	1Lt x 4w	Module	LED	2800k	322Lm	Lamps

Certification Wall Damp Location CUL



Pg 27



**Iron** Wall Sconce

Finish BS	Glass OPL	Dimensions L 10" H 11.75" Ext 4" Canopy: L 10.2" W 9" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20739-BS/OPL	2Lt x 60w	E-26	A-19	2700k	1640Lm	
C20739BSOPLN1218BS	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
20739LED-BS/OPL	2Lt x 4w	Module	LED	2800k	644Lm	Lamps

Certification Wall Damp Location CUL



Pg 23



**Aquarius** Glass & metal wall fixture

Finish BS	Glass FST	Dimensions L 8" H 15" Ext 3" Canopy: L 12.6" W 5.25" H 2.4"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62095-BS/FST	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps
C62095BSFSTEN1218B	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
62095LED-BS/FST	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps

Certification Wall Damp Location CETL



**Metro** Wall Fixture

Finish BS	Glass OPL	Dimensions W 8.25" H 14" Ext 4" Canopy: L 12.4" W 4.75" H 2.25"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
62218-BS/OPL	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps	
C62218BSOPLN1218BS	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps	
62218LED-BS/OPL	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps	

Certification Wall Damp Location CETL  



**Sierra** Wall and vanity fixture

Finish BS	Diffuser ACR	Dimensions W 5.5" H 15.5" Ext 4" Canopy: L 15.5" W 5.5" H .9"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
31025-BS/ACR	1Lt x 24w	2G11	FT24DL	3000k	1800Lm	Lamps	

Certification Wall Damp Location CETL  



**Bo** Wall and vanity fixture

Finish BS	Glass OPL	Dimensions L 5.75" H 19.25" Ext 4" Canopy: L 5.1" W 18.5" H 1.4"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
62235-BS/OPL	2Lt x 60w	E-12	B-10				
C62235BSOPLN1218BQ	2Lt x 18w	GU-24	Quad		2500Lm		
62235LED-BS/OPL	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps	

Certification Wall Damp Location CETL  



**Bo** Wall and vanity fixture

Finish BS	Glass OPL	Dimensions L 5.75" H 12" Ext 4" Canopy: L 5.1" W 11" H 1.4"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included	
62236-BS/OPL	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps	
C62236BSOPLN1118Q	2Lt x 18w	G24q-2	Quad	2700k	2500Lm		
62236LED-BS/OPL	1Lt x 10.8w	Module	LED	3000k	1265Lm	Lamps	

Certification Wall Damp Location CETL  



**Oxygen** Wall and vanity fixture

Finish BS	Glass CKF	Dimensions L 7.25" H 14.5" Ext 3.25" Canopy: L 12.88" W 4.75" H 0.75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62060-BS/CKF	1Lt x 150w	R7s	J-118	2900k	2600Lm	Lamps
C62060BSCKFEH3218Q	2Lt x 18w	GU-24	Spiral	2700k	69Lm	Lamps

Certification Wall Damp Location CETL



**Radon** Wall and vanity fixture

Finish BS	Glass CKF	Dimensions L 5.5" H 11.5" Ext 3.75" Canopy: L 7.75" W 4.5" H .88"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62055-BS/CKF	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps
C62055BSCKFEN1126BS	1Lt x 26w	GU-24	Spiral	2700k	1710Lm	Lamps
62055LED-BS/CKF	1Lt x 10.8w	Module	LED	3000k	1265Lm	Lamps

Certification Wall Damp Location CETL



62050-BS/CKF



62050-BS/OPL

**Radon** Wall Fixture

Finish BS	Glass CKF OPL	Dimensions L 8.5" H 13.75" Ext 2.75" Canopy: L 14.25" W 8.5" H .4"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62050-BS/___	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps
C62050BS___EN1126Q	2Lt x 26w	G24q-3	Quad		3420Lm	
62050LED-BS/___	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps

Certification Wall Damp Location CETL



**Radon** Wall Fixture

Finish BS	Glass CKF	Dimensions L 7.75" H 8" Ext 2.5" Canopy: L 4.75" W 6.88" H .75"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62054-BS/CKF	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps
C62054BSCKFEN1113Q	1Lt x 13w	G24q-1	Quad		900Lm	

Certification Wall Damp Location CETL





20415-OPL



20415-ALB


**Daphne** Wall Sconce, supplied with BS and WH knobs for attaching the glass shade

Finish BS	Glass ALB OPL	Dimensions L 5.5" H 11.75" Ext 4" Canopy: L 8.5" W 4" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20415-___	1Lt x 100w	E-26	A-19			
C20415___EN1126B	1Lt x 26w	GU-24	Spiral	2700k	1710Lm	Lamps
20415LED-___	1Lt x 4w	Module	LED	2800k	322Lm	Lamps

Certification Wall Damp Location CUL  



**Artemis** Wall Sconce



Finish BS	Glass OPL	Dimensions L 7.5" H 12" Ext 4" Canopy: L 12.25" W 7.4" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20416-BS/OPL	2Lt x 60w	E-26	A-19			
C20416BSOPLN1218BS 	2Lt x 18w	GU-24	Spiral	2700k	69Lm	Lamps
20416LED-BS/OPL	2Lt x 4w	Module	LED	2800k	644Lm	Lamps

Certification Wall Dry Location CUL  




**Cobalt** Wall Sconce

Finish BS	Glass OPL	Dimensions W 6.25" H 11" Ext 4" Canopy: L 11" W 6.2" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20421-BS/OPL	1Lt x 60w	E-26	A-19			
C20421BSOPLN1113B	1Lt x 13w	GU-24	Spiral	2700k	900Lm	Lamps

Certification Wall Dry Location CUL  



**Artemis** Wall Sconce

Finish SAT	Glass OPL	Dimensions L 11.5" H 10" Ext 4" Canopy: L 11.4" W 10.4" H .5"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
20420-SAT/OPL	2Lt x 60w	E-26	A-19			
C20420SATOPLN1218BS 	2Lt x 18w	GU-24	Spiral	2700k	69Lm	Lamps
20420LED-SAT/OPL	1Lt x 4w	Module	LED	2800k	322Lm	Lamps

Certification Wall Dry Location CUL  



B 55541-CRM





A 55540-CRM



**MAXIME CHANET Designer**

**Origami** French designed and inspired by nature, produced from pre-stressed concrete with articulating metal louvers for light positioning

Finish	RU	Plate	CRM	Certification	Wall	Dry	Location	CETL	 	
Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Canopy	Included	Options	
A	<b>55540-CRM</b>	3Lt x 10w	G4	Bi-Pin HGN	2900k	360Lm	L 10" H 14" Ext 4"	L 12.6" W 8.75" H 1.5"	Lamps	LED lamp model G4LEDSMD1.5W
B	<b>55541-CRM</b>	6Lt x 20w	G4	Bi-Pin HGN	2900k	1800Lm	L 10" H 46" Ext 4"	L 44.6" W 8.75" H 1.5"	Lamps	LED lamp model G4LEDSMD1.5W





70025LED-BL



Blue LED strip available on request



70025LED-SAT

**Sail** LED Wall washer available with Blue centre LED strip

Finish BL SAT	Dimensions L 7" H 10" Ext 3" Canopy: L 4.25" W 4.25" H .75"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
70025LED-___	2Lt x 5w + 1Lt x 4w	Module	LED	3000k	640Lm	Lamps

Certification Wall Dry Location CETL



180 deg  
Articulating LED Wand

**Sabre** LED Wall Fixture with articulating LED wand for correct light placement

Finish SAT	Diffuser ACR	Dimensions H 26" Canopy D 4.5" Ext 2.8"				
Model	Wattage	Base	Type	Kelvin	Lumen	Included
70026LED-SAT	10Lt x 1w	Module	LED	3000k	700Lm	Lamps

Certification Wall Damp CETL





70003LED-BS



70003LED-BRZ

**Epiphanie** Gooseneck wall lamp hardwire or pin-up with included cord & plug

Finish BRZ BS	Dimensions L 5" H 16.7" Canopy: D 5" H 2.25"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
70003LED-___	1Lt x 3w	Module	LED	3500k	165Lm	Lamps

Certification Wall Dry Location CETL 



62089-BS



62089-BRZ

**LED** Gooseneck wall lamp hardwire or pin-up with included cord & plug

Finish BRZ BS	Dimensions D 5" H 16.7" Canopy: D 5" H 1.5"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62089-___	1Lt x 1w	Module	LED	4700k	65Lm	Lamps

Certification Wall Dry Location CETL 



70017LED-CH/CRM



**Cyprus** LED task light and fluorescent wall lamp, with 4-way on/off switching. hard-wire or pin-up with included cord & plug

Finish	CH BRZ	Shade	CRM	Dimensions				
				H 14.25"	L 15.25"	W 9"	Ext 9"	Canopy: L 5.25" W 4.4" H 1.4"
Model	Wattage	Base	Type	Kelvin	Lumen	Included		
70017LED-___/CRM	1 x 18w + 1 x 3W	GU-24 + Module	Spiral + LED	2700k & 3500k	1250Lm + 165Lm	Lamps		

Certification Wall Dry Location **CETL** 



62088-BS



62088-BRZ

**Odyssey** Wall lamp with on/off switch hard-wire or pin-up with included cord & plug

Finish BRZ BS	Dimensions L 5 To 20" H 26" Canopy: L 4.9" W 4.9" H .9"					
Model	Wattage	Base	Type	Kelvin	Lumen	Included
62088-__	1Lt x 35w	GU-10	MR-16	2700k	600Lm	Lamps

Certification Wall Dry Location CETL 

# Vanities





A 23906-BS/FCL



B 23907-BS/FCL




C 23908-BS/FCL



**Astor** Crystal wall-vanity fixture, mountable in vertical or horizontal positions

Finish BS	Glass FCL	Floating junction box cover, ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	23906-BS/FCL	L 4.5" H 7.75" Ext 4.25"	L 4.4" W 4.4" H .5"	2Lt x 60w	G9	G9 Hgn	2900k	1600Lm	Lamps
B	23907-BS/FCL	L 24.5" H 7.75" Ext 4.4"	L 23.2" W 1.4" H 1"	6Lt x 60w	G9	G9 Hgn	2900k	4800Lm	Lamps
C	23908-BS/FCL	L 34" H 7.75" Ext 4.5"	L 32.6" W 1.4" H 1"	8Lt x 60w	G9	G9 Hgn	2900k	6400Lm	Lamps

Certification Wall Damp Location CETL 



A 23831-CH/FCL



B 23832-CH/FCL



C 23833-CH/FCL



D 23834-CH/FCL

**Astor** Square crystal with frosted centre wall/vanity, mountable in an up or down position

Finish	CH	Glass	FCL	Floating junction box cover, ideal for off centre junction box placement						
Model	Fixture Dimensions	Canopy Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included		
A	23831-CH/FCL	L 4.75" H 5.2" Ext 4.2"	L 4.75" W 4.75" H 0.5"	1Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps	
B	23832-CH/FCL	L 15.75" H 5.25" Ext 4.5"	L 13" W 1.25" H .25"	2Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps	
C	23833-CH/FCL	L 25" H 5.25" Ext 4.5"	L 20.5" W 1.25" H .75"	3Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps	
D	23834-CH/FCL	L 34" H 5.25" Ext 4.5"	L 29.5" W 1.25" H .75"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps	



Certification Wall Damp Location CETL  LISTED



A 23910-CH/FCL



B 23911-CH/FCL



C 23912-CH/FCL



**Glas'e** Diamond crystal chrome wall-vanity, mountable in an up or down position

Finish	CH Glass FCL	Floating junction box cover, ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	23910-CH/FCL	L 4.75" H 5.25" Ext 5.25"	L 4.4" W 4.4" H .5"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	23911-CH/FCL	L 25" H 5.25" Ext 5.25"	L 23.6" W 1.5" H 1"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	23912-CH/FCL	L 34" H 5.25" Ext 5.25"	L 32.5" W 1.5" H 1"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps

Certification Wall Damp Location CETL 





A 23916-CH/FCL



B 23917-CH/FCL



C 23918-CH/FCL



**Glas'e** Square etched crystal chrome wall-vanity, mountable in an up or down position

Finish	CH Glass FCL	Floating junction box cover, ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	23916-CH/FCL	L 4.75" H 5.25" Ext 5.25"	L 4.4" W 4.4" H .5"	1Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps
B	23917-CH/FCL	L 25" H 5.25" Ext 5.25"	L 23.6" W 1.5" H 1"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	23918-CH/FCL	L 34" H 5.25" Ext 5.25"	L 32.5" W 1.5" H 1"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps

Certification Wall Damp Location CETL 



A 23920-CH/CCL



B 23921-CH/CCL



C 23922-CH/CCL



D 23923-CH/CCL

Pg 134



**Prizm** Mosaic crystal wall-vanity, mountable in an up or down position

Finish	CH	Glass	CCL	Full size frame, ideal for off centre junction box placement					
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	23920-CH/CCL	L 4.75" H 4.75" Ext 5"	L 4.75" W 4.75" H .75"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	23921-CH/CCL	L 20" H 4.75" Ext 5"	L 20" W 4.75" H .75"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	23922-CH/CCL	L 28" H 4.75" Ext 5"	L 28" W 4.75" H .75"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps
D	23923-CH/CCL	L 36" H 4.75" Ext 5"	L 36" W 4.75" H .75"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall Damp Location CETL 



A 51011-CH/CCL



B 51012-CH/CCL



C 51013-CH/CCL



D 51014-CH/CCL

Pg 98



**Kristal** Crystal beads encased in clear glass wall-vanity series, mountable in an up or down position

Finish	CH	Glass CCL	Full size frame, ideal for off centre junction box placement						
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	51011-CH/CCL	L 4.75" H 5.5" Ext 5.5"	D 4.75" W 4.75" H 1"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	51012-CH/CCL	L 13.5" H 5.5" Ext 5.5"	L 13.4" W 4.75" H 1"	2Lt x 60w	G9	G9 Hgn	2900k	1600Lm	Lamps
C	51013-CH/CCL	L 21.60" H 5.5" Ext 5.5"	L 21.6" W 4.75" H 1"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
D	51014-CH/CCL	L 30" H 5.5" Ext 5.5"	L 30" W 4.75" H 1"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps

Certification Wall Damp Location CETL  LISTED



A 62251-CH/OPL



B 62252-CH/OPL



C 62253-CH/OPL



D 62254-CH/OPL

**Styx** Wall-vanity fixture, mountable in vertical or horizontal positions

Finish	CH	Glass	OPL	Floating junction box cover, ideal for off centre junction box placement					
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62251-CH/OPL	L 9.4" H 4.4" Ext 4"	L 6.25" W 4.75" H 1"	1Lt x 75w	R7s	J-78	2900k	1050Lm	Lamps
B	62252-CH/OPL	L 23.25" H 1.6" Ext 4"	L 23.25" W 2.6" H 1"	2Lt x 75w	R7s	J-78	2900k	2100Lm	Lamps
C	62253-CH/OPL	L 35" H 1.6" Ext 4"	L 35" W 2.6" H 1"	3Lt x 75w	R7s	J-78	2900k	3150Lm	Lamps
D	62254-CH/OPL	L 46.5" H 1.6" Ext 4"	L 46.5" W 2.6" H 1"	4Lt x 75w	R7s	J-78	2900k	4200Lm	Lamps

Certification Wall Damp Location CETL  



A 62258-CH/FST



B 62259-CH/FST



C 62260-CH/FST



D 62262-CH/FST

### Nitro Wall-vanity

Finish	CH	Glass	FST	Full size back-plate ideal for off centre junction box placement						
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included		
A	62258-CH/FST	L 6.5" H 5" Ext 3"	L 5.6" W 4.5" H .6"	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps	
B	62259-CH/FST	L 15.9" H 5" Ext 3"	L 14.5" W 4.5" H .6"	2Lt x 100w	R7s	J-78	2900k	3300Lm	Lamps	
C	62260-CH/FST	L 24.5" H 5" Ext 3"	L 23.5" W 4.5" H .6"	3Lt x 100w	R7s	J-78	2900k	4950Lm	Lamps	
D	62262-CH/FST	L 42.5" H 5" Ext 3"	L 41.5" W 4.5" H .6"	5Lt x 100w	R7s	J-78	2900k	8250Lm	Lamps	

Certification Wall Damp Location CETL  



A 62263-BS/OPL



B 62264-BS/OPL



C 62265-BS/OPL


**Vapor** OPL glass wall-vanity, mountable in an up or down position

Finish	BS	Glass	OPL	Floating junction box cover, ideal for off centre junction box placement					
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62263-BS/OPL	L 20" H 6" Ext 4.4"	L 20" W 2" H .75"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
B	62264-BS/OPL	L 27" H 6" Ext 4.4"	L 27" W 2" H .75"	4Lt x 60w	G9	G9 Hgn	2900k	3200Lm	Lamps
C	62265-BS/OPL	L 34" H 6" Ext 4.4"	L 34" W 2" H .75"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall Damp Location CETL 



A 50175-BS/OPL

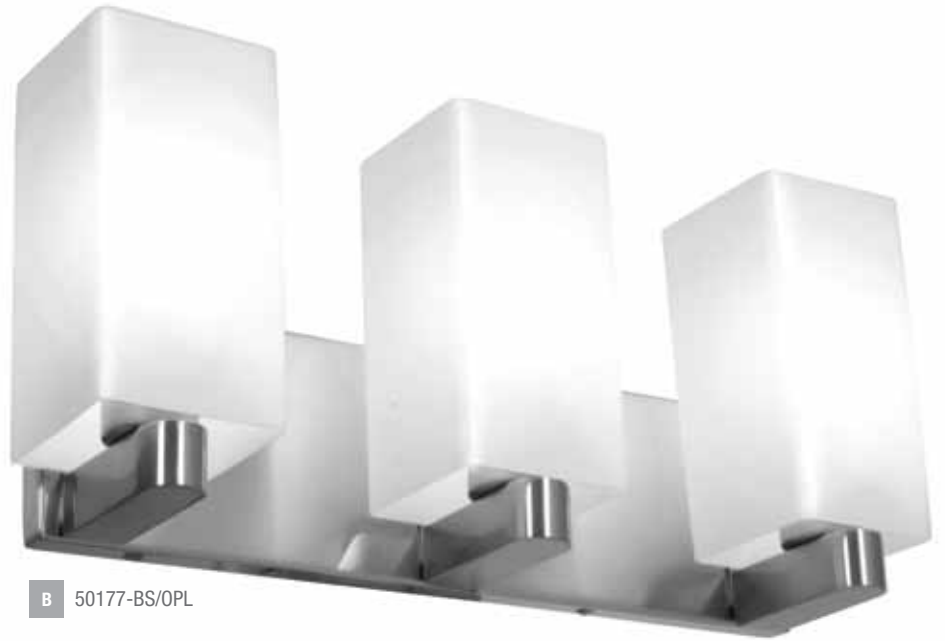

B 50177-BS/OPL



C 50178-BS/OPL

**Archi** Square glass, wall-vanity collection

Finish BS	Glass OPL	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	50175-BS/OPL	L 4.7" H 8.75" Ext 4.5"	L 5.9" W 4.75" H .75"	1Lt x 60w	E-26	A-19			
	C50175BSOPLN1113B	L 4.7" H 8.75" Ext 4.5"	L 5.9" W 4.75" H .75"	1Lt x 13w	GU-24	Spiral	2700k	900Lm	Lamps
B	50177-BS/OPL	L 18.3" H 8.75" Ext 4.5"	L 16.4" W 4.75" H .9"	3Lt x 60w	E-26	A-19			
	C50177BSOPLN1313B	L 18.3" H 8.75" Ext 4.5"	L 16.4" W 4.75" H .9"	3Lt x 13w	GU-24	Spiral	2700k	2700Lm	Lamps
C	50178-BS/OPL	L 24.4" H 8.75" Ext 4.5"	L 22.5" W 4.75" H .9"	4Lt x 60w	E-26	A-19			
	C50178BSOPLN1413B	L 24.4" H 8.75" Ext 4.5"	L 22.5" W 4.75" H .9"	4Lt x 13w	GU-24	Spiral	2700k	3600Lm	Lamps

Certification Wall Damp Location CETL 



A 53301-BS/OPL



B 53302-BS/OPL





C 53303-BS/OPL



D 53304-BS/OPL

**Cosmos** Wall fixture, mountable in an up or down position

Finish BS	Glass OPL	Full size back-plate ideal for off centre junction box placement								
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included		
A	53301-BS/OPL	L 9.2" H 6.6" Ext 3.5" 	L 8.25" W 4.25" H 1"	1Lt x 40w	G9	G9 Hgn	2900k	380Lm	Lamps	
B	53302-BS/OPL	L 18" H 6.4" Ext 4" 	L 17" W 4.4" H 1.2"	2Lt x 40w	G9	G9 Hgn	2900k	760Lm	Lamps	
C	53303-BS/OPL	L 24" H 6.75" Ext 4.6"	L 24" W 4.4" H 1.2"	3Lt x 40w	G9	G9 Hgn	2900k	1140Lm	Lamps	
D	53304-BS/OPL	L 36" H 6.75" Ext 8"	L 36" W 4.4" H 1.2"	4Lt x 40w	G9	G9 Hgn	2900k	1520Lm	Lamps	

Certification Wall Damp Location CETL 





A 62311-BS/FST



B 62312-BS/FST



C 62313-BS/FST



D 62314-BS/FST

Pg 30



**Titanium** Metal wave vanity fixtures with frosted glass diffusers


Finish	BS	Glass	FST	Floating junction box cover, ideal for off centre junction box placement					
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62311-BS/FST	L 12" H 2.75" Ext 4"	L 6.4" W 2" H .75"	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps
B	62312-BS/FST	L 23.6" H 2.75" Ext 4"	L 13.5" W 2" H .75"	2Lt x 100w	R7s	J-78	2900k	3300Lm	Lamps
C	62313-BS/FST	L 35.5" H 2.75" Ext 4"	L 25.25" W 2" H .75"	3Lt x 100w	R7s	J-78	2900k	4950Lm	Lamps
D	62314-BS/FST	L 47" H 2.75" Ext 4"	L 37.4" W 2" H .75"	4Lt x 100w	R7s	J-78	2900k	6600Lm	Lamps

Certification Wall Damp Location CETL





A 63811-18-CH/AMB

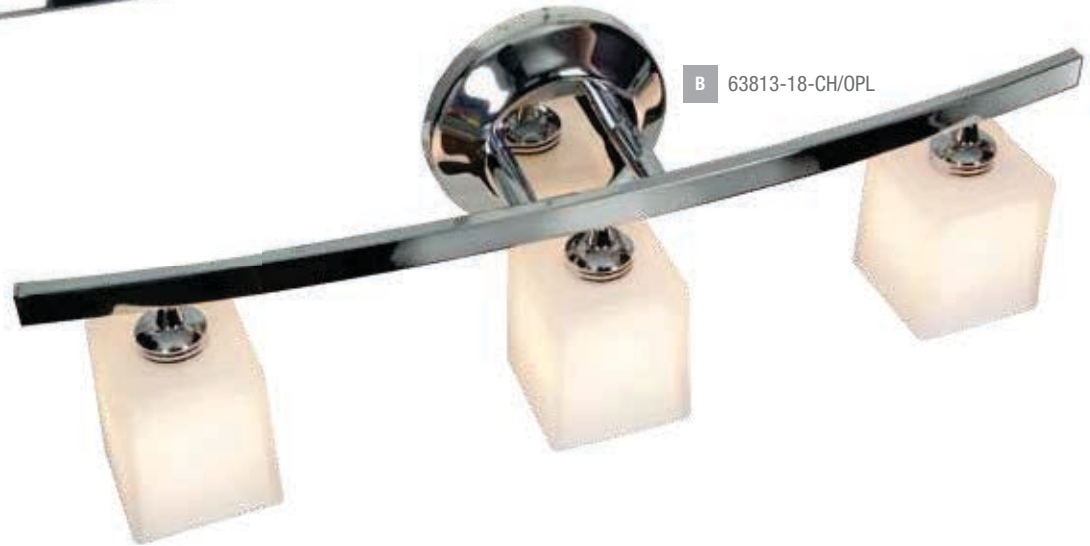

B 63813-18-CH/OPL



C 63815-18-MC/OPL

**Sydney** Wall-vanity, with cube glass, mountable in an up or down position

Finish CH MC Glass AMB OPL

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dim	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-18-_/__	L 7.5" H 7.5" Ext 5"	D 5" H 1.25"	H 3.5" L 3" W 3"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-18-_/__	L 22" H 7.5" Ext 5"	D 5" H 1.25"	H 3.5" L 3" W 3"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-18-_/__	L 32" H 7.5" Ext 5"	D 5" H 1.25"	H 3.5" L 3" W 3"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 63811-19-CH/FST



B 63813-19-CH/FST



C 63815-19-MC/FST

**Sydney** Wall-vanity, with cone glass, mountable in an up or down position

Finish CH MC Glass FST

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dim	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-19-_/__	L 7.5" H 9" Ext 5"	D 5" H 1.25"	D 4" H 5"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-19-_/__	L 22" H 9" Ext 5"	D 5" H 1.25"	D 4" H 5"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-19-_/__	L 32" H 9" Ext 5"	D 5" H 1.25"	D 4" H 5"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 63811-20-CH/OPL



B 63813-20-CH/OPL



C 63815-20-MC/OPL

**Sydney** Wall-vanity, with thea glass, mountable in an up or down position

Finish CH MC Glass OPL

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-20-_/__	L 7.5" H 8.5" Ext 4.5"	D 5" H 1.25"	H 4.7" L 7" W 6"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-20-_/__	L 22.5" H 8.5" Ext 4.5"	D 5" H 1.25"	H 4.7" L 7" W 6"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-20-_/__	L 32.5" H 8.5" Ext 4.5"	D 5" H 1.25"	H 4.7" L 7" W 6"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 63811-41-CH/AMM



B 63813-41-CH/AMM



C 63815-41-MC/AMM

**Sydney** Wall-vanity, with AMM cone glass, mountable in an up or down position

Finish CH MC Glass AMM

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-41-_/AMM	L 7.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 4" H 4.9"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-41-_/AMM	L 22.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 4" H 4.9"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-41-_/AMM	L 32.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 4" H 4.9"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 63811-46-CH/OPL



B 63813-46-MC/OPL



C 63815-46-CH/OPL

**Sydney** Wall-vanity, with mini cone glass, mountable in an up or down position

Finish CH MC Glass OPL

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-46-___/OPL	H 8.5" L 7.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-46-___/OPL	H 8.5" L 22.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-46-___/OPL	H 8.5" L 32.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 63811-47-CH/OPL



B 63813-47-MC/OPL



C 63815-47-MC/OPL

**Sydney** Wall-vanity, with cylinder glass, mountable in an up or down position

Finish CH MC Glass AMB OPL

	Model	Fixture Dimensions	Canopy Dimensions	Glass Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	63811-47-___/AMM	L 7.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	1Lt x 60w	G9	G9 Hgn	2900k	800Lm	Lamps
B	63813-47-___/AMM	L 22.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	3Lt x 60w	G9	G9 Hgn	2900k	2400Lm	Lamps
C	63815-47-___/AMM	L 32.5" H 8.5" Ext 4.5"	D 5" H 1.25"	D 2.5" H 3"	5Lt x 60w	G9	G9 Hgn	2900k	4000Lm	Lamps

Certification Wall CETL 



A 20452GU-BS/WHT



B 20453GU-BS/WHT



C 20454GU-BS/WHT

Pg 38



**Aztec** Steel ring with white glass vanity fixtures

Finish	Full size back-plate ideal for off centre Junction box placement				
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type
A 20452GU-BS/WHT	L 24" H 4.5" Ext 6"	L 24" W 4.5" H .9"	2Lt x 13w	GU-24	Spiral
B 20453GU-BS/WHT	L 36" H 4.5" Ext 6"	L 36" W 4.5" H .9"	3Lt x 13w	GU-24	Spiral
C 20454GU-BS/WHT	L 48" H 4.5" Ext 6"	L 48" W 4.5" H .9"	4Lt x 13w	GU-24	Spiral

Certification Wall Damp Location CUL 





A 23901-BS/OPL






B 23903-CH/OPL




C 23904-BS/OPL


**Frisco** Wall-vanity, mountable in an up or down position

Finish BS CH Glass OPL								
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A 23901-___/OPL	L 5" H 6" Ext 6.5"	L 6" W 4.6" H .6"	1Lt x 60w	E-26	A-19			
C23901__OPLN118BS 	L 5" H 6" Ext 6.5"	L 6" W 4.6" H .6"	1Lt x 18w	GU-24	Spiral	2700k	1250Lm	Lamps
B 23903-___/OPL	L 26" H 7.5" Ext 6.5"	D 4.75" L 26.25" W 2" H .6"	3Lt x 60w	E-26	A-19			
C23903__OPLN1318BS 	L 26" H 7.5" Ext 6.5"	D 4.75" L 26.25" W 2" H .6"	3Lt x 18w	GU-24	Spiral	2700k	3750Lm	Lamps
C 23904-___/OPL	L 35" H 7.5" Ext 6.5"	D 4.75" L 35" W 2" H .6"	4Lt x 60w	E-26	A-19			
C23904__OPLN1418BS 	L 35" H 7.5" Ext 6.5"	D 4.75" L 35" W 2" H .6"	4Lt x 18w	GU-24	Spiral	2700k	5000Lm	Lamps

Certification Wall Damp Location CETL 

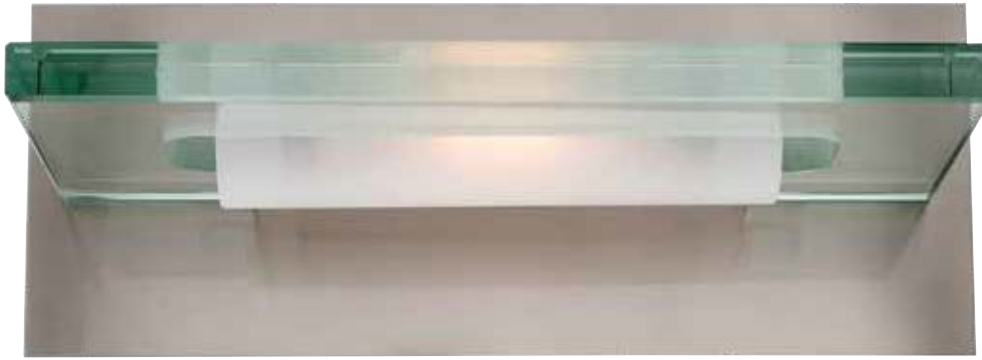

A 62091-BS/12C

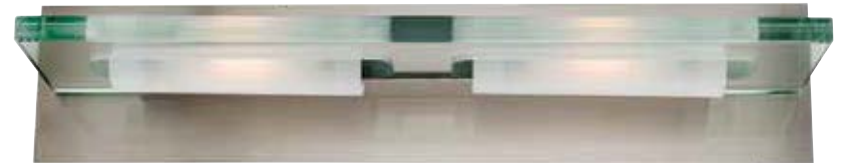

B 62092-BS/12C



C 62093-BS/12C



D 62099-BS/12C

Pg 35



**Phoebe** Thick clear panel glass vanities

Finish	BS	Glass	12C	Full size back-plate ideal for off centre junction box placement						
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included		
A 62091-BS/12C	H 5" L 12.75" Ext 6.25"	L 12" W 4.4" H .75"	1Lt x 100w	R7s	J-78	2900k	1650Lm	Lamps		
B 62092-BS/12C	H 5" L 23" Ext 6.25"	L 22.25" W 4.4" H .75"	2Lt x 100w	R7s	J-78	2900k	3300Lm	Lamps		
C 62093-BS/12C	H 5" L 33.25" Ext 6.25"	L 32.25" W 4.4" H .75"	3Lt x 100w	R7s	J-78	2900k	4950Lm	Lamps		
D 62099-BS/12C	H 5" L 43.5" Ext 6.25"	L 42.5" W 4.4" H .75"	4Lt x 100w	R7s	J-78	2900k	6600Lm	Lamps		

Certification Wall Damp Location CETL 



A 62061-SC/FST



B 62062-SC/FST



C 62063-SC/FST

### Roto Wall & Vanity

Finish SC	Glass FST	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62061-SC/FST	L 12" H 5.5" Ext 4"	L 6" W 4.25" H 1.1"	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps
	C62061SCFSTEN1118Q	L 12" H 5.5" Ext 4"	L 6" W 4.25" H 1.1"	1Lt x 18w	G24q-2	Quad	2700k	1250Lm	
B	62062-SC/FST	L 24" H 5.5" Ext 4"	L 18" W 4.25" H 1.1"	2Lt x 100w	R7s	J-118	2900k	3300Lm	Lamps
	C62062SCFSTEH3226Q	L 24" H 5.5" Ext 4"	L 18" W 4.25" H 1.1"	2Lt x 26w	G24q-3	Quad	2700k	3420Lm	
C	62063-SC/FST	L 36" H 5.5" Ext 4"	L 28.1" W 4.25" H 1.1"	3Lt x 100w	R7s	J-118	2900k	4950Lm	Lamps
	C62063SCFSTEH3226Q	L 36" H 5.5" Ext 4"	L 28.1" W 4.25" H 1.1"	2Lt x 26w	G24q-3	Quad	2700k	3420Lm	


Certification Wall CUL  



A 53311-BS/CKF



B 53313-BS/CKF

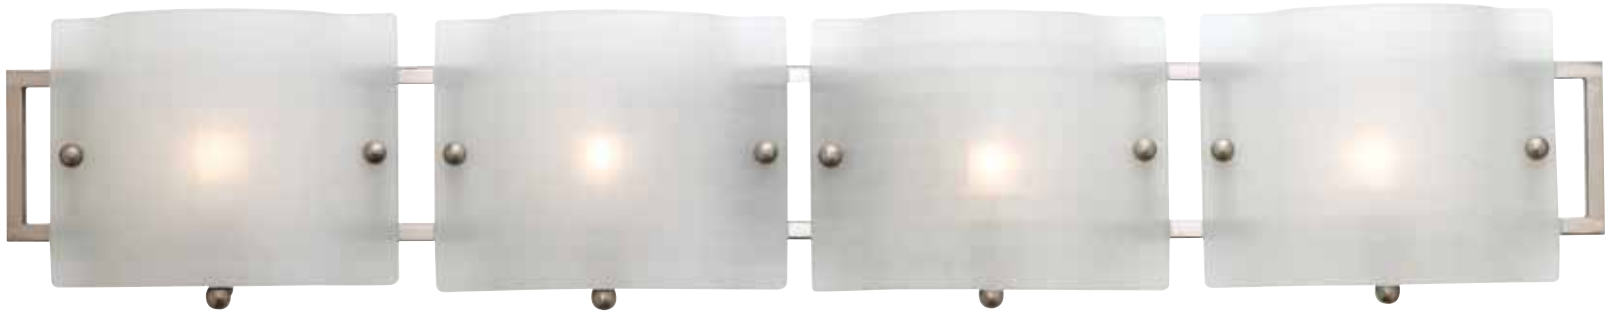

C 53314-BS/CKF

**Nara** Checkered frosted curved glass, wall-vanity collection

Finish BS Glass CKF

	Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type
A	53311-BS/CKF	L 11.25" H 7" Ext 4"	L 8.25" W 4.5" H .75"	1Lt x 60w	E-12	B-10
B	53313-BS/CKF	L 30.5" H 7" Ext 4"	L 8.25" W 4.5" H .75"	3Lt x 60w	E-12	B-10
C	53314-BS/CKF	L 40.5" H 7" Ext 4"	L 8.25" W 4.5" H .75"	4Lt x 60w	E-12	B-10

Certification Wall Damp Location CETL  



A 62041-BS/CKF



B 62042-BS/CKF



C 62043-BS/CKF

**Helium** Curved panel frosted lined glass wall-vanity series

Finish BS	Glass CKF	Full size back-plate ideal for off centre junction box placement								
Model		Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62041-BS/CKF	L 12.5" H 4.75" Ext 3.5"	L 12.1" W 4.6" H .6"	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps	
	C62041BSCKFEN1113BQ	L 12.5" H 4.75" Ext 3.5"	L 12.1" W 4.6" H .6"	1Lt x 13w	GU-24	Quad	2700k	900Lm	Lamps	
B	62042-BS/CKF	L 24.5" H 4.75" Ext 4.25"	L 23.5" W 4.6" H .75"	2Lt x 100w	R7s	J-118	2900k	3300Lm	Lamps	
	C62042BSCKFEN1226BS	L 24.5" H 4.75" Ext 4.25"	L 23.5" W 4.6" H .75"	2Lt x 26w	GU-24	Spiral	2700k	3420Lm	Lamps	
	62042LED-BS/CKF	L 24.5" H 4.75" Ext 4.25"	L 23.5" W 4.6" H .75"	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps	
C	62043-BS/CKF	L 32" H 4.75" Ext 5"	L 31.5" W 4.6" H .75"	2Lt x 100w	R7s	J-118	2900k	3300Lm	Lamps	
	C62043BSCKFEH1224T5	L 32" H 4.75" Ext 5"	L 31.5" W 4.6" H .75"	2Lt x 24w	Bi-Pin	T-5 HO		3500Lm		
	62043LEDD-BS/CKF <b>Dimmable</b>	L 32" H 4.75" Ext 5"	L 31.5" W 4.6" H .75"	1Lt x 25w	Module	LED	3000k	3040Lm	Lamps	

Certification Wall Damp Location CETL  



B 62233-BS/LFR



A 62231-BS/LFR





C 62234-BS/LFR




Pg 171


**Neon** Curved panel line-frosted glass wall-vanity collection

Finish BS	Glass LFR	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62231-BS/LFR	L 16" H 6.3" Ext 4.5"	L 10.5" W 5.4" H 1.4"	1Lt x 150w	R7s	J-118	2900k	2600Lm	Lamps
	C62231BSLFREN1218B	L 16" H 6.3" Ext 4.5"	L 10.5" W 5.4" H 1.4"	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps
B	62233-BS/LFR	L 24" H 6.3" Ext 4.5"	L 19.25" W 5.4" H 0.88"	2Lt x 100w	R7s	J-118	2900k	3300Lm	Lamps
	C62233BSLFREN1213BS 	L 24" H 6.3" Ext 4.5"	L 19.25" W 5.4" H 0.88"	2Lt x 13w	GU-24	Spiral	2700k	1800Lm	Lamps
C	62234-BS/LFR	L 32" H 6.3" Ext 4.5"	L 27.4" W 5.4" H 0.88"	3Lt x 100w	R7s	J-78	2900k	4950Lm	Lamps
	C62234BSLFREN1218BS 	L 32" H 6.3" Ext 4.5"	L 27.4" W 5.4" H 0.88"	2Lt x 18w	GU-24	Spiral	2700k	2500Lm	Lamps


Certification Wall Damp Location CETL 

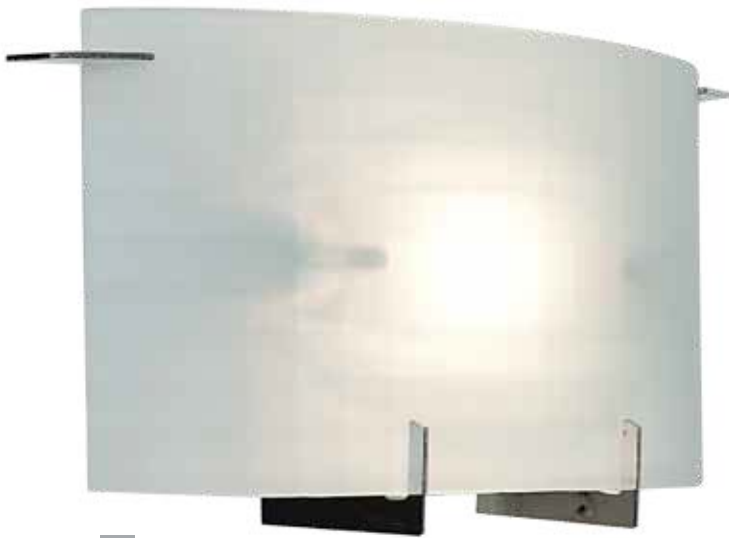

A 62051-BS/CKF

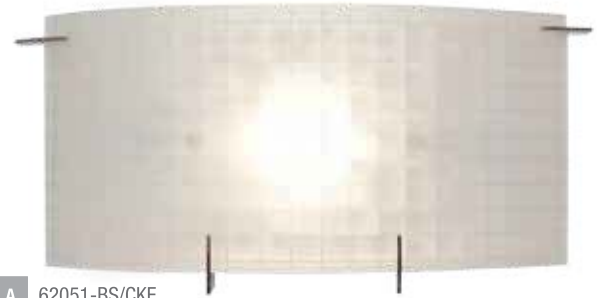

A 62051-BS/CKF

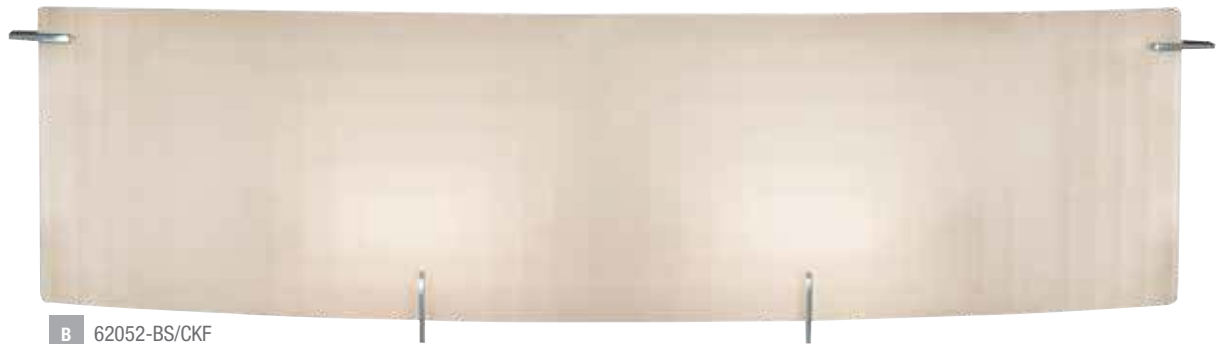

B 62052-BS/CKF



C 62053-BS/CKF



**Oxygen** Checkered frosted bent glass, wall-vanity collection

Finish CH	Glass CKF	Full size back-plate ideal for off centre junction box placement								
Model		Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62051-CH/CKF	L 13.75" H 6.75" Ext 3.25"	L 8.5" W 5.5" H 0.88"	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps	
	C62051CHCKFEN1118Q	L 13.75" H 6.75" Ext 3.25"	L 8.5" W 5.5" H 0.88"	1Lt x 18w	G24q-2	Quad		1250Lm		
B	62052-CH/CKF	L 25.25" H 6.75" Ext 4.25"	L 17" W 5.5" H 0.88"	2Lt x 150w	R7s	J-118	2900k	5200Lm	Lamps	
	C62052CHCKFEN1226BS	L 25.25" H 6.75" Ext 4.25"	L 17" W 5.5" H 0.88"	2Lt x 26w	GU-24	Spiral	2700k	3420Lm	Lamps	
C	62053-CH/CKF	L 33.5" H 6.75" Ext 4.75"	L 25.25" W 5.5" H 0.88"	2Lt x 150w	R7s	J-118	2900k	5200Lm	Lamps	
	C62053CHCKFEN1226BS	L 33.5" H 6.75" Ext 4.75"	L 25.25" W 5.5" H 0.88"	2Lt x 26w	GU-24	Spiral	2700k	3420Lm	Lamps	

Certification Wall Damp Location CETL LISTED





A 30110-BS/FST



B 30111-BS/FST

**Tahoe** Wall and ceiling fixture

Finish BS	Glass FST	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	30110-BS/FST	L 24.25" W 6.1" Ext 2.55"	L 24.2" W 4.2" H 2.25"	2Lt x 24w	Bi-Pin	T-5 HO	3000k	3500Lm	Lamps
B	30111-BS/FST	L 36" W 6.1" Ext 2.55"	L 36" W 4.2" H 2.25"	2Lt x 39w	Bi-Pin	T-5 HO	3000k	6200Lm	Lamps

Certification Wall Ceiling CETL  



A 31004-BS/OPL



B 31005-BS/OPL

**Aspen** Wall-vanity fixture, mountable in vertical or horizontal positions

Finish BS	Glass OPL	Floating junction box cover, ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	31004-BS/OPL	L 29.5" H 4.25" Ext 4"	L 24.1" W 2.6" H 1.25"	1Lt x 24w	Bi-Pin	T-5 HO	3000k	1750Lm	Lamps
B	31005-BS/OPL	L 41.5" H 4.5" Ext 4.75"	L 35.9" W 2.6" H 1.25"	1Lt x 39w	Bi-Pin	T-5 HO	3000k	3100Lm	Lamps

Certification Wall Damp Location CETL 





A 31021-BS/ACR



B 31022-BS/ACR

**Sierra** Wall - vanity fixture, mountable in vertical or horizontal positions

Finish BS	Diffuser ACR	Full size back-plate ideal for off centre junction box placement							
Model		Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	31021-BS/ACR	L 24.75" W 4" Ext 2.5"	L 22.1" W 3.9" H .4"	2Lt x 24w	Bi-Pin	T-5 HO	3000k	3500Lm	Lamps
B	31022-BS/ACR	L 36.75" W 4" Ext 2.5"	L 34.1" W 3.9" H .4"	2Lt x 39w	Bi-Pin	T-5 HO	3000k	6200Lm	Lamps

Certification Wall Ceiling Damp Location CETL  



A 31032-BS/ACR



B 31033-BS/ACR

**Sequoia** Wall-vanity fixture, mountable in vertical or horizontal positions

Finish BS	Diffuser ACR	Full size back-plate ideal for off centre junction box placement							
Model		Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included
A	31032-BS/ACR	L 25.25" W 5.5" Ext 3.62"	L 24.9" W 5.25" H .6"	2Lt x 24w	Bi-Pin	T-5 HO	3000k	3500Lm	Lamps
B	31033-BS/ACR	L 37" W 5.5" Ext 3.62"	L 36.75" W 5.25" H .6"	2Lt x 39w	Bi-Pin	T-5 HO	3000k	6200Lm	Lamps

Certification Wall Ceiling Damp Location CUL  



A 31010-BS/OPL



B 31011-CH/OPL

**Geneva** Wall-vanity series featuring curved opal glass on a brushed steel or chrome frame

<b>Finish</b> BS CH Glass OPL	Floating junction box cover, ideal for off centre junction box placement								
<b>Model</b>	<b>Fixture Dimensions</b>	<b>Back-Plate Dimensions</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>	
A 31010-_/OPL	L 24.5" W4" Ext 3.5"	L 25.6" W 2.25" H 1.25"	1Lt x 24w	Bi-Pin	T-5 HO	3000k	1750Lm	Lamps	
B 31011-_/OPL	L 36.6" W4" Ext 3.5"	L 37.4" W 2.25" H 1.25"	1Lt x 39w	Bi-Pin	T-5 HO	3000k	3100Lm	Lamps	

Certification Wall Damp CETL  



A 31006LEDD-BS/OPL



B 31007LEDD-BS/OPL

**Vail** Dimmable LED wall-vanity fixture, mountable in vertical or horizontal positions

<b>Finish</b> BS Glass OPL	Included with round and square floating junction box cover, ideal for off centre junction box placement								
<b>Model</b>	<b>Fixture Dimensions</b>	<b>Back-Plate Dimensions</b>	<b>Wattage</b>	<b>Base</b>	<b>Type</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Included</b>	
A 31006LEDD-BS/OPL	L 18.5" H 3.5" Ext 3.5"	L 14.5" W 3" H 1.25"	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps	
B 31007LEDD-BS/OPL	L 22.5" H 3.5" Ext 3.5"	L 18.75" W 3" H 1.25"	1Lt x 13w	Module	LED	3000k	1520Lm	Lamps	

Certification Wall Damp CETL  



A 31002-BS/OPL




B 31003-BS/OPL


**Vail** Wall-vanity fixture, mountable in vertical or horizontal positions

Finish	BS	Glass	OPL	Included with round and square floating junction box cover, ideal for off centre junction box placement							
Model	Fixture Dimensions			Back-Plate Dimensions		Wattage	Base	Type	Kelvin	Lumen	Included
A	31002-BS/OPL			L 30.25" H 4.25" Ext 3.25"	L 25.6" W 3" H 1.25"	1Lt x 24w	Bi-Pin	T-5 HO	3000k	1750Lm	Lamps
	31002LEDD-BS/OPL			L 30.25" H 4.25" Ext 3.25"	L 25.6" W 3" H 1.25"	1Lt x 26w	Module	LED	3000k	3040Lm	Lamps
B	31003-BS/OPL			L 42" H 4.25" Ext 3.25"	L 37.5" W 3" H 1.25"	1Lt x 39w	Bi-Pin	T-5 HO	3000k	3100Lm	Lamps
	31003LEDD-BS/OPL			L 42" H 4.25" Ext 3.25"	L 37.5" W 3" H 1.25"	1Lt x 40w	Module	LED	3000k	4560Lm	Lamps

Certification Wall Damp Location CETL  

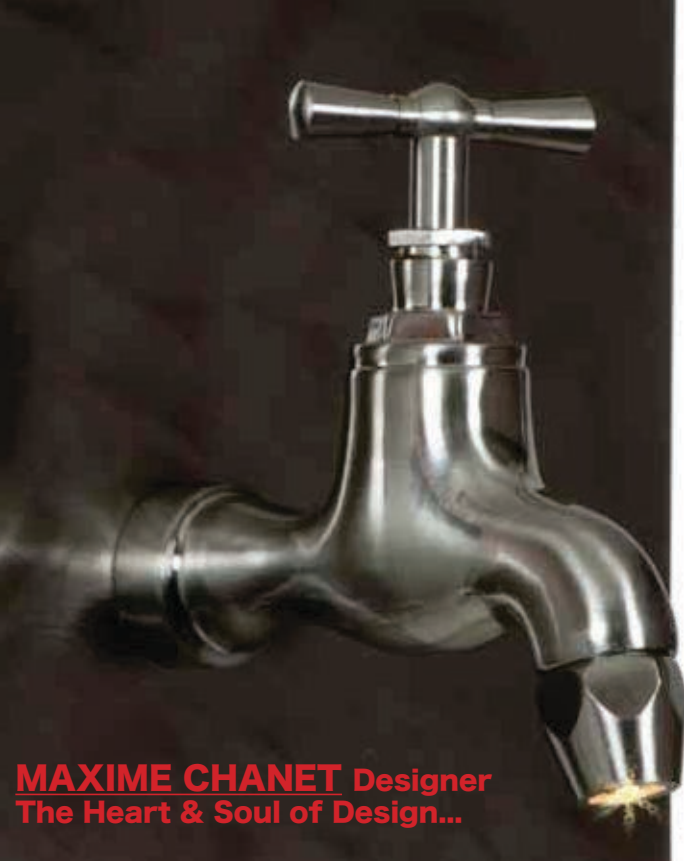

**MAXIME CHANET Designer**  
The Heart & Soul of Design...

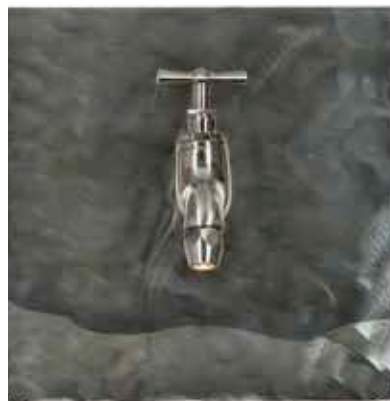

A 70060LED-CH/BS



A 70060LED-CH/GREY



B 70061LED-CH/GREY



C 70062LED-CH/GREY

**Waterworks** Wall Vanity lighting art, with prestressed concrete back plate (70060 available in prestressed concrete or Steel back plate)

Finish CH	Backplate GREY	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	70060LED-CH/__(Grey or BS)	L 8" H 8" Ext 5"	L 6.25" W 6.25" H 1"	1Lt x 1w	Module	LED	3000k	55Lm	Lamps
B	70061LED-CH/GREY	L 23.5" H 8" Ext 5"	L 22.5" W 6.75" H 1.25"	3Lt x 1w	Module	LED	3000k	165Lm	Lamps
C	70062LED-CH/GREY	L 59" H 10.5" Ext 5"	L 57.9" W 9.5" H 1.25"	7Lt x 1w	Module	LED	3000k	385Lm	Lamps

Certification Wall Damp Location CETL 



A 70041LED-CH/CLFR



B 70043LED-CH/CLFR



C 70044LED-CH/CLFR




D 70045LED-CH/CLFR

**Dewdrop** LED Wall and Vanity collection with high output LED encapsulated in a clear acrylic with frosted inner dome diffuser


Finish CH Lens CLFR									
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A 70041LED-CH/CLFR	D 4.75" Ext 6"	D 4.75" H 1.4"	1Lt x 4.5w	Module	LED	3000k	215Lm	Lamps	
B 70043LED-CH/CLFR	L 17.6" H 5.25" Ext 6.5"	D 4.75" L 8.2" W 2.4" H 1.6"	3Lt x 4.5w	Module	LED	3000k	645Lm	Lamps	
C 70044LED-CH/CLFR	L 24.2" H 5.25" Ext 6.5"	D 4.75" L 9.5" W 2.4" H 1.6"	4Lt x 4.5w	Module	LED	3000k	860Lm	Lamps	
D 70045LED-CH/CLFR	L 30" H 5.25" Ext 6.5"	D 4.75" L 9.5" W 2.4" H 1.6"	5Lt x 4.5w	Module	LED	3000k	1075Lm	Lamps	



Certification Wall Damp Location CETL 

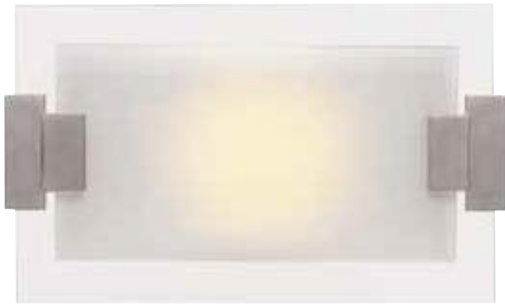

A 62255-BS/FST

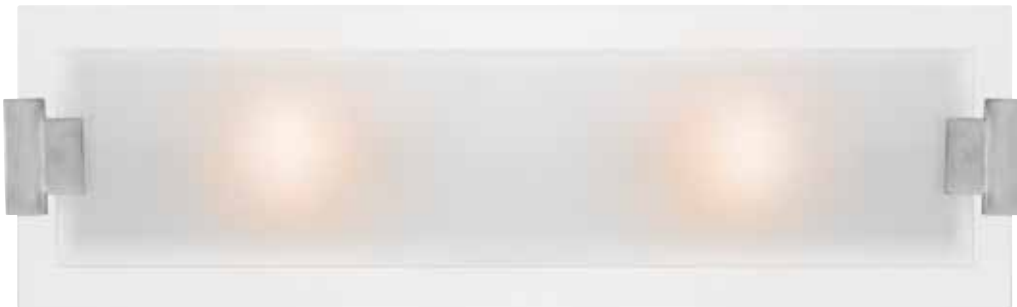

B 62256-BS/FST



C 62257-BS/FST

**Plasma** Frosted plate glass wall-vanity collection

Finish BS	Glass FST	Full size back-plate ideal for off centre junction box placement							
Model	Fixture Dimensions	Back-Plate Dimensions	Wattage	Base	Type	Kelvin	Lumen	Included	
A	62255-BS/FST	L 12" H 7" Ext 3"	L 9.1" W 4.5" H 1.75"	1Lt x 100w	R7s	J-118	2900k	1650Lm	Lamps
	C62255BSFSTEN1118Q	L 12" H 7" Ext 3"	L 9.1" W 4.5" H 1.75"	1Lt x 18w	G24q-2	Quad	2700k	1250Lm	
B	62256-BS/FST	L 24" H 7" Ext 3"	L 21" W 4.5" H 1.75"	2Lt x 100w	R7s	J-118	2900k	3300Lm	Lamps
	C62256BSFSTEH3218Q	L 24" H 7" Ext 3"	L 21" W 4.5" H 1.75"	2Lt x 18w	G24q-2	Quad	2700k	2500Lm	
C	62257-BS/FST	L 36" H 7" Ext 3"	L 33.1" W 4.5" H 1.75"	3Lt x 100w	R7s	J-118	2900k	4950Lm	Lamps
	C62257BSFSTEN1313Q	L 36" H 7" Ext 3"	L 33.1" W 4.5" H 1.75"	3Lt x 13w	G24q-1	Quad	2700k	2700Lm	

Certification Wall Damp Location CETL  



# Outdoor



20290-BL/FST



20290-SAT/FST






20290-WH/FST

W 4.25" L 8.25"

H 3.5"

### Nauticus Wet location bulkhead

Finish: BL SAT WH Glass: FST		Certification: Wall or Ceiling Wet Location CUL  						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20290-___/FST	1Lt x 60w	A-19	E-26			W 4.25" L 8.25" Ext 3.5"	L 8" W 4.4" H 1"	
C20290___FSTEN1113BS 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	W 4.25" L 8.25" Ext 3.5"	L 8" W 4.4" H 1"	Lamps



20294-BL/FST






20294-SAT/FST



D 7" Ext 4"  
20294-WH/FST

D 7"

### Nauticus Wet location bulkhead

Finish: BL SAT WH Glass: FST		Certification: Wall or Ceiling Wet Location CUL  						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20294-___/FST	1Lt x 60w	A-19	E-26			D 7" Ext 4"	D 7" H 1"	
C20294___FSTEN1113BS 	1Lt x 13w	A-19	GU-24	900Lm	2700k	D 7" Ext 4"	D 7" H 1"	Lamps





20292-BL/FST



20292-SAT/FST





20292-WH/FST

W 6.5" L 11"

H 4.75"

### Nauticus Wet location bulkhead

Finish: BL SAT WH Glass: FST		Certification: Wall or Ceiling Wet Location CUL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20292-___/FST	1Lt x 100w	A-19	E-26			W 6.5" L 11" Ext 4.75"	L 10.6" W 6.5" H 1"		
C20292 ___ FSTEN1118BS 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	W 6.5" L 11" Ext 4.75"	L 10.6" W 6.5" H 1"	Lamps	



20296-BL/FST





20296-SAT/FST



D 9.5" Ext 5"  
20296-WH/FST

D 9.5"

### Nauticus Wet location bulkhead

Finish: BL SAT WH Glass: FST		Certification: Wall or Ceiling Wet Location CUL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20296-___/FST	1Lt x 100w	A-19	E-26			D 9.5" Ext 5"	D 9.5" H 1"		
C20296 ___ FSTEN1118BS 	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	D 9.5" Ext 5"	D 9.5" H 1"	Lamps	



20291-BL/FST



20291-SAT/FST






20291-WH/FST

L 8.25" Ext 3.5"

H 4.25"

**Nauticus Wet Location bulkhead, eyelid to prevent light pollution, suitable for dark-sky**

<b>Finish:</b> BL WH SAT <b>Glass:</b> FST	<b>Certification:</b> Wall or Ceiling Wet Location CUL  							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20291-___/FST	1Lt x 60w	A-19	E-26			L 8.25" H 4.25" Ext 3.5"	L 8" W 4.4" H 1"	
C20291___FSTEN1113BS 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	L 8.25" H 4.25" Ext 3.5"	L 8" W 4.4" H 1"	Lamp



20337MG-SAT/FST





D 5" Ext 4.75"

20337MG-BRZ/FST

H 5"

**MicroMoon Marine grade wet location ceiling or wall fixture**

<b>Finish:</b> BRZ SAT <b>Glass:</b> RFR	<b>Certification:</b> Wall only Wet Location CETL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20337MG-___/FST 	1 x 13w	Spiral	GU-24	900Lm	2700k	D 5" Ext 4.75"	D 4.4" H 1.5"	Lamp






20355MG-SAT/FST



D 12" H 5"

D 12" Ext 5"  
20355MG-BRZ/FST

**Oceanus Marine grade wet location ceiling or wall fixture**

Finish: BRZ SAT Glass: FST		Certification: Wall or Ceiling Wet Location CETL  						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20355MG-___/FST	1Lt x 60w	A-19	E-26			D 12" Ext 5"	L 5" W 4.6"	
C20355 ___ FSTEN1118BS 	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	D 12" Ext 5"	L 5" W 4.6"	Lamp
20355MGLED-___/FST	1Lt x 10.8w	A-19	E-26	1265Lm	3000k	D 12" Ext 5"	L 5" W 4.6"	Lamp






20356MG-BRZ/FST



H 5.5"

D 15.75" Ext 5.5"  
20356MG-SAT/FST

**Oceanus Marine grade wet location ceiling or wall fixture**

Finish: BRZ SAT Glass: FST		Certification: Wall or Ceiling Wet Location CETL  						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20356MG-___/FST	2Lt x 60w	A-19	E-26	1640Lm	2700k	D 15.75" Ext 5.5"	L 5" W 4.6"	
C20356 ___ FSTEN1218BS 	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	D 15.75" Ext 5.5"	L 5" W 4.6"	Lamp
20356MGLED-___/FST	1Lt x 13w	LED	Module	1520Lm	3000k	D 15.75" Ext 5.5"	L 5" W 4.6"	Lamp

Certification: Wall or Ceiling Wet Location CETL






A 20300MG-BRZ/RFR



B 20302MG-SAT/RFR


### Poseidon Marine grade wet location bulkhead

Finish: BRZ SAT Glass: RFR		Certification: Wall only Wet Location CETL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
A 20300MG-___/RFR	1Lt x 60w	A-19	E-26	820Lm	2700k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	
A C20300___RFREN1118BS 	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	Lamps
20300LEDMG-___/RFR	1Lt x 4w	LED	Module	322Lm	2800k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	Lamps
B 20302MG-___/RFR	1Lt x 60w	A-19	E-26	820Lm	2700k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	
B C20302___RFREN1118BS 	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	Lamps
20302LEDMG-___/RFR	1Lt x 4w	LED	Module	322Lm	2800k	L 7.25" H 10.75" Ext 5.5"	L 4.6" W 4.6"	Lamps



L 7.25" Ext 5.5"

H 10.75"

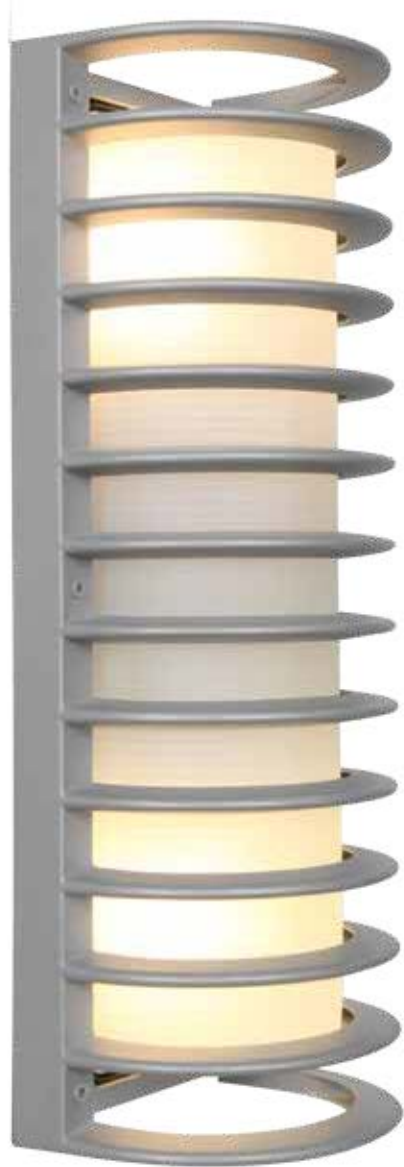

A 20342MG-SAT/RFR







B 20343MG-BRZ/RFR



C 20344MG-SAT/RFR

### Poseidon Marine grade wet location bulkhead

Finish: BRZ SAT Glass: RFR		Certification: Wall only Wet Location CETL		 					
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
A 20342MG-___/RFR	2Lt x 60w	A-19	E-26			L 6" H 16.75" Ext 5.3"	L 7" W 4.5"		
A C20342___RFREN1218BS 	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 6" H 16.75" Ext 5.3"	L 7" W 4.5"	Lamps	
20342MGLED-___/RFR	1Lt x 13w	LED	Module	1520Lm	3000k	L 6" H 16.75" Ext 5.3"	L 7" W 4.5"	Lamps	
B 20343MG-___/RFR	2Lt x 60w	A-19	E-26			L 6" H 16.75" Ext 5.3"	L 7" W 4.5"		
B C20343___RFREN1218B	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 6" H 16.75" Ext 5.3"	L 7" W 4.5"	Lamps	
C 20344MG-___/RFR	2Lt x 60w	A-19	E-26			L 6" H 16.75" Ext 5.3"	L 7" W 4.5"		
C C20344___RFREN1218BS 	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 6" H 16.75" Ext 5.3"	L 7" W 4.5"	Lamps	
20344MGLED-___/RFR	1Lt x 13w	LED	Module	1520Lm	3000k	L 6" H 16.75" Ext 5.3"	L 7" W 4.5"	Lamps	





H 16.75"

L 6" Ext 5.3"



### Poseidon Marine Grade wet location bulkhead

<b>Finish:</b> SS Glass: FST		<b>Certification:</b> Wall only Wet Location CETL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20301-SS/FST	1Lt x 60w	A-19	E-26			L 10.6" H 6.5" Ext 4.25"	L 8.5" W 5"	
C20301SSFSTEN1118BS 	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	L 10.6" H 6.5" Ext 4.25"	L 8.5" W 5"	Lamps
20301LED-SS/FST	1Lt x 10.8w	Led	Module	1265Lm	3000k	L 10.6" H 6.5" Ext 4.25"	L 8.5" W 5"	Lamps


L 10.6" Ext 4.25"

H 6.5"



20373-BRZ/OPL

### Tyro Wet Location wall fixture

<b>Finish:</b> BRZ SAT Glass: OPL		<b>Certification:</b> Wall only Wet Location CUL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20373-___/OPL	1Lt x 100w	A-19	E-26			L 14.65" H 5.25" Ext 4.2"	W 5.25" L 14.65"	
C20373___OPLN1118B	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	L 14.65" H 5.25" Ext 4.2"	W 5.25" L 14.65"	Lamps
20373MGLED-___/FST	1Lt x 13w	LED	Module	1520Lm	3000k	L 14.65" H 5.25" Ext 4.2"	W 5.25" L 14.65"	Lamps




L 14.65" Ext 4.2"  
20373-SAT/OPL

H 5.25"



### Oden Wet Location wall fixture

Finish: SAT Glass: FST	Certification: Wall only Wet Location CETL					CETL LISTED		
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20330-SAT/FST	2Lt x 60w	A-19	E-26	1640Lm	2700k	L 10.25" W 10.25" Ext 4.75"	L 10.25" W 10.25"	
C20330SATFSTEN1218BS 	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 10.25" W 10.25" Ext 4.75"	L 10.25" W 10.25"	Lamps
20330LED-SAT/FST	1Lt x 13w	LED	Module	1520Lm	3000k	L 10.25" W 10.25" Ext 4.75"	L 10.25" W 10.25"	Lamps






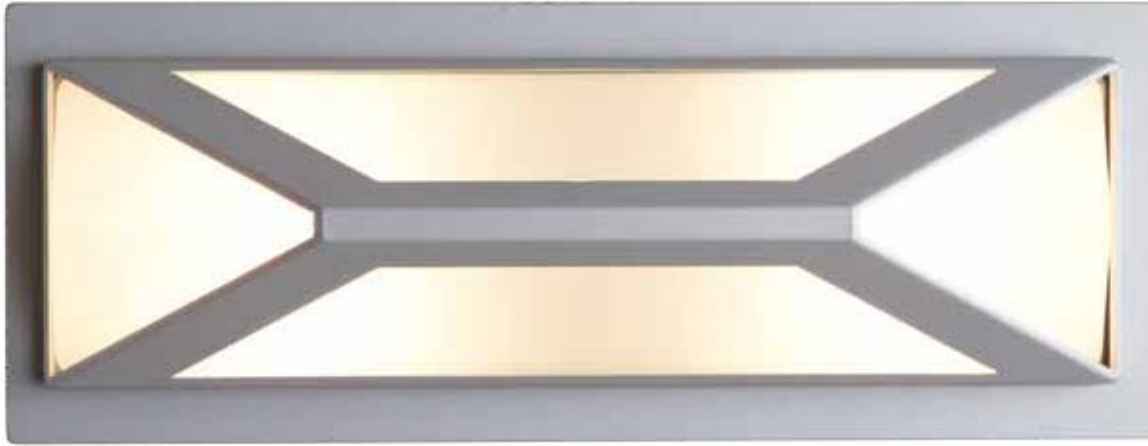
20375MG-SAT/FST



D 6.5" Ext 4"  
20375MG-BRZ/FST

### Nymph Marine grade wet location wall fixture

Finish: BRZ SAT Glass: FST	Certification: Wall only Wet Location CETL					CETL LISTED  		
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20375MG-___/FST 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	D 6.5" Ext 4"	D 4.4" H .4"	Lamps
20375MGLED-___/FST	1Lt x 10.8w	LED	Module	1265Lm	3000k	D 6.5" Ext 4"	D 4.4" H .4"	Lamps



20370MG-SAT/RFR



H 16.25"

L 6.5" Ext 6"  
20370MG-BRZ/RFR

### Nyami Marine grade wet location led wall fixture

Finish: BRZ SAT Glass: FST	Certification: Wall only Wet Location CETL					CETL LISTED			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20370MG-___/FST	2Lt x 60w	A-19	E-26			L 6.5" H 16.25" Ext 6"	L 5.9" W 4.2"		
C20370___FSTEN1218BS	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 6.5" H 16.25" Ext 6"	L 5.9" W 4.2"	Lamps	
20370MGLED-___/FST	1Lt x 13w	LED	Module	1520Lm	3000k	L 6.5" H 16.25" Ext 6"	L 5.9" W 4.2"	Lamps	



20362-SAT/OPL



L 11.5"

W 10.25" Ext 4"

### Artemis Wet location wall fixture

Finish: BRZ SAT Glass: OPL	Certification: Wall only Wet Location CUL					CUL LISTED			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20362-___/OPL	2Lt x 13w	Spiral	GU-24	1800Lm	2700k	L 11.5" W 10.25" Ext 4"	L 11.4" W 10.4"	Lamps	
C20362___OPLN1218BS	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 11.5" W 10.25" Ext 4"	L 11.4" W 10.4"	Lamps	






20333MG-BRZ/RFR



H 13"

L 7" Ext 5"  
20333MG-SAT/RFR

### Neptune Marine grade wet location wall fixture

Finish: BRZ SAT Glass: RFR	Certification: Wall only Wet Location CETL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20333MG-___/RFR	1Lt x 75w	A-19	E-26			L 7" H 13" Ext 5"	L 7.9" W 4.5"	
C20333___RFREN1218B	2Lt x 18w	Spiral	GU-24	2500Lm	2700k	L 7" H 13" Ext 5"	L 7.9" W 4.5"	Lamps
20333MGLED-___/RFR	1Lt x 10.8w	LED	Module	1265Lm	3000k	L 7" H 13" Ext 5"	L 7.9" W 4.5"	Lamps



20335-SAT/RFR


30335MG-BRZ/RFR



H 8.25"




L 10.5" Ext 4.75"

### Neptune Marine grade wet location wall fixture

Finish: BRZ SAT Glass: RFR	Certification: Wall only Wet Location CETL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20335MG-___/RFR	1Lt x 60w	A-19	E-26			L 10.5" H 8.25" Ext 4.75"	L 7.9" W 4.5"	
C20335___RFREN1118B	1Lt x 18w	Spiral	GU-24	1250Lm	2700k	L 10.5" H 8.25" Ext 4.75"	L 7.9" W 4.5"	Lamps
20335MGLED-___/RFR	1Lt x 10.8w	LED	Module	1265Lm	3000k	L 10.5" H 8.25" Ext 4.75"	L 7.9" W 4.5"	Lamps






### Eclipse Wet Location Wall Fixture

Finish: SAT Glass: OPL	Certification: Wall only Wet Location CUL  							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20449-___/OPL	1Lt x 75w	A-19	E-26			L 9.25" H 14" Ext 4"	L 9.25" W 4.1"	
C20449SATOPLEN1113BS 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	L 9.25" H 14" Ext 4"	L 9.25" W 4.1"	Lamps



### Brick Wet Location wall fixture

Glass: OPL	Certification: Wall only Wet Location CUL  							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20450-___/OPL	1Lt x 75w	A-19	E-26			L 5.5" H 10.25" Ext 4"	L 9.25" W 4.1"	
C20450PLEN1113BS 	1Lt x 13w	Spiral	GU-24	900Lm	2700k	L 5.5" H 10.25" Ext 4"	L 9.25" W 4.1"	Lamps

L 5.5" Ext 4"



A 20346MG-BRZ/ACR



B 20347MG-SAT/ACR




A 20346MG-SAT/ACR

H 26"

L 10" Ext 5.7"

### Kraken Marine grade wet location wall fixture

Finish: BRZ SAT Diffuser: ACR		Certification: Wall only Wet Location CETL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
A 20346MG-___/ACR	2Lt x 24w	T-5 HO	Bi-Pin	3500Lm	3000k	L 10" H 26" Ext 5.7"	L 6" W 4.4"	Lamps
B 20347MG-___/ACR	2Lt x 24w	T-5 HO	Bi-Pin	3500Lm	3000k	L 10" H 26" Ext 5.7"	L 6" W 4.4"	Lamps



23060MGLED-SAT



23060MGLED-BRZ

W 5.25" Ext 3"

L 5.25"

**ZYZX Marine grade wet location led wall-washer**

Finish: BRZ SAT	Certification: Wall only Wet Location CETL   							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
23060MGLED-___	2Lt x 3.5w	LED	Module	280Lm	3000k	L 5.25" W 5.25" Ext 3"	W 5.25" L 5.25"	Lamps



23061MGLED-SAT



23061MGLED-BRZ

W 5.25" Ext 3"

L 5.25"



**ZYZX Marine grade wet location led wall-washer**

Finish: BRZ SAT	Certification: Wall only Wet Location CETL   							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
23061MGLED-___	1Lt x 3.5w	LED	Module	140Lm	3000k	L 5.25" W 5.25" Ext 3"	W 5.25" L 5.25"	Lamps



Ext 2.5"

### LEDORB Wet location led wall fixture

<b>Finish:</b> SAT <b>Glass:</b> ACR		<b>Certification:</b> Wall only Wet Location CETL		 				
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20394LED-SAT	1Lt x 12w	LED	Module	500Lm	3000k	D 7.75" Ext 2.5"	D 6" H 1.5"	Lamps



23064MGLED-SAT



23064MGLED-BRZ

W 5.25" Ext 2.5"

### ZYZX Marine grade wet location led wall-washer

<b>Finish:</b> BRZ SAT		<b>Certification:</b> Wall only Wet Location CETL		  				
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
23064MGLED-___	2Lt x 3.5w	LED	Module	280Lm	3000k	L 5.25" H 5.25" Ext 2.5"	L 5.25" W 5.25"	Lamps



23063MGLED-SAT



23063MGLED-BRZ

W 4.75" Ext 2.75"

L 7.2"

**Archer Marine grade wet location led wall washer**

Finish: BRZ SAT Glass: CLR		Certification: Wall only Wet Location CETL				  			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
23063MGLED-___	2Lt x 4.5w	LED	Module	770Lm	3000k	L 7.2" W 4.75" Ext 2.75"	L 7.2" W 4.75"	Lamps	



23062MGLED-SAT



23062MGLED-BRZ

W 4.75" Ext 2.75"

L 7.2"

**Archer Marine grade wet location led wall washer**

Finish: BRZ SAT Glass: CLR		Certification: Wall only Wet Location CETL				  			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
23062MGLED-___	1Lt x 4.5w	LED	Module	385Lm	3000k	L 7.2" W 4.75" Ext 2.75"	L 7.2" W 4.75"	Lamps	








20350MG-BRZ/CLR



20350MG-SAT/CLR

H 4.25"

**KO Marine grade wet location wall washer**

<b>Finish:</b> BRZ SAT <b>Glass:</b> CLR		<b>Certification:</b> Wall only Wet Location CETL   						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20350MG-___/CLR	1Lt x 35w	MR-16	GU-10	600CD	2900k	D 4.2" H 4.25" L 4.2" Ext 4"	D 4.2" H 1.4"	Lamps
20350MGLED-___/CLR	1Lt x 4w	MR-16 LED	GU-5.3	215Lm	3000k	D 4.2" H 4.25" L 4.2" Ext 4"	D 4.2" H 1.4"	Lamps

D 4.2" Ext 4"






20350MG-SAT/CLR



20350MG-BRZ/CLR

H 4"

**KO Pivotal marine grade wet location spotlight**

<b>Finish:</b> BRZ SAT <b>Glass:</b> CLR		<b>Certification:</b> Wall only Wet Location CETL   						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20351MG-___/CLR	1Lt x 35w	MR-16	GU-10	600CD	2900k	D 4" H 4" L 4 to 6" Ext 5"	D 4.2" H 1.4"	Lamps
20351MGLED-___/CLR	1Lt x 4w	MR-16 LED	GU-5.3	215Lm	3000k	D 4" H 4" L 4 to 6" Ext 5"	D 4.2" H 1.4"	Lamps

L 6" x D 4" Ext 5"





20352MG-SAT/CLR






20352MG-BRZ/CLR

D 4" H 6.5"

L 4" x D 4" Ext 4"

**KO** Marine grade wet location wall washer

<b>Finish:</b> BRZ SAT <b>Glass:</b> CLR		<b>Certification:</b> Wall only Wet Location CETL			  			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20352MG-___/CLR	1Lt x 35w	MR-16	GU-10	600CD	2900k	D 4" H 6.5" L 4" Ext 4"	D 4.2" H 1.4"	Lamps
20352MGLED-___/CLR	2Lt x 4w	MR-16 LED	GU-5.3	430Lm	3000k	D 4" H 6.5" L 4" Ext 4"	D 4.2" H 1.4"	Lamps





23026MG-BRZ



23026MG-SAT

D 4.4" H 6.5"

L 2.75" x W " D 4.4" Ext 5"

**Myra** Marine grade wet location wall washer with articulating head

Finish: BRZ SILV Glass: CLR		Certification: Wall only Wet Location CETL  							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
23026MG-___	2Lt x 50w	MR-16	GU-10	1900CD	2700k	D 4.4" H 6.5" L 2.75" Ext 5"	D 4.4" H .6" H .4"	Lamps	



23025MG-BRZ




23025MG-SAT

D 4.4"

L 3.4" x W 2.75" Ext 5"

**Myra** Marine Grade wet location fully adjustable spotlight

Finish: BRZ SILV Glass: CLR		Certification: Wall only Wet Location CETL  							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
23025MG-___	1Lt x 50w	MR-16	GU-10	950CD	2700k	D 4.4" L 3.4" W 2.75" Ext 5"	D 4.4" H .6"	Lamps	

20385MG-SAT/CLR





20385MG-BRZ/CLR



H 9"

L 4.4" Ext 4.8"

**Poseidon Marine grade wet location wall-washer**

Finish: BRZ SAT Glass: CLR		Certification: Wall only Wet Location CETL				 			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20385MG-___/CLR	2Lt x 35w	MR-16	GU-5.3	2500CD	2900k	L 4.4" H 9" Ext 4.8"	D 4.4" H 1.2"	Lamps	

20384MG-SAT/CLR





20384MG-BRZ/CLR



H 6"

L 4.4" Ext 4.8"

**Poseidon Marine grade wet location wall-washer**

Finish: BRZ SAT Glass: CLR		Certification: Wall only Wet Location CETL				 			
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20384MG-___/CLR	1Lt x 35w	MR-16	GU-5.3	1250CD	2900k	L 4.4" H 6" Ext 4.8"	D 4.4" H 1.2"	Lamps	



20364-BRZ




20364-SAT

H 12"

W 4" Ext 5.5"

### Poseidon Wet location wall washer

<b>Finish:</b> BRZ SAT <b>Glass:</b> CLR		<b>Certification:</b> Wall only Wet Location CUL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20364-___/CLR	2Lt x 60w	A-19	E-26			W 4.75" H 12.25" Ext 7"	D 4.75"		
<b>C20364</b> ___ <b>CLREN1213B</b>	2Lt x 13w	Spiral	GU-24	1800Lm	2700k	W 4.75" H 12.25" Ext 7"	D 4.75" H .5"	Lamps	



20363-SAT



20363-BL




20363-BRZ

H 6"

W 4" Ext 5.5"

### Poseidon Wet location wall washer and dark sky fixture

<b>Finish:</b> BL BRZ SAT		<b>Certification:</b> Wall only Wet Location CUL 							
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included	
20363-___	1Lt x 60w	A-19	E-26			L 6" W 4" Ext 5.5"	D 4.75"		
<b>C20363</b> ___ <b>EN1113B</b>	1Lt x 13w	Spiral	GU-24	900Lm	2700k	L 6" W 4" Ext 5.5"	D 4.75"	Lamps	



20389MG-SAT/CLR





20389MG-BRZ/CLR

H 14"

L 6.2" Ext 8.4"

**Trident Wet location wall washer**

<b>Finish:</b> BRZ SAT <b>Glass:</b> CLR		<b>Certification:</b> Wall only Wet Location CETL  						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20389MG-___/CLR	2Lt x 75w	A-19	E-26			L 6.2" H 14" Ext 8.4"	L 6.9" W 4.25"	
<b>C20389</b> ___ <b>CLREN1213B</b>	2Lt x 13w	Spiral	GU-24	1800Lm	2700k	L 6.2" H 14" Ext 8.4"	L 6.9" W 4.25"	Lamps



20444-SAT




20444-BRZ

H 12"

W 4.75" Ext 6.9"

**Poseidon Damp location wall washer, for use in covered installations**

<b>Finish:</b> BRZ SAT		<b>Certification:</b> Wall only Damp Location CUL 						
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
20444-___	2Lt x 60w	A-19	E-26			W 4.75" H 12" Ext 6.9"	D 4.75" H .5"	
<b>C20444</b> ___ <b>EN1113B</b>	2Lt x 13w	Spiral	GU-24	1800Lm	2700k	W 4.75" H 12" Ext 6.9"	D 4.75" H .5"	Lamps



A 20367MG-BRZ/OPL



L 4.3" Ext 5.9"

H 11.25"





B 20368MG-SAT/OPL



L 4.3" Ext 5.9"

H 12.2"

**Nyz Marine grade wet location wall fixture**

Finish: BRZ SAT Glass: OPL		Certification: Wall only Wet Location CETL		 				
Model	Wattage	Type	Base	Lumen	Kelvin	Dimensions	Back-Plate	Included
A 20367MG-___/OPL	1Lt x 18w	FT18DL	2G11	1200Lm	3000k	L 4.3" H 11.25" Ext 5.9"	H 1.75" L 5.9" W 4.2"	Lamps
B 20368MG-___/OPL	2Lt x 18w	FT18DL	2G11	2400Lm	3000k	L 4.3" H 11.25" Ext 5.9"	1.75" L 5.9" W 4.2"	Lamps

# InteLED



**Cove | Undercabinet | Wall Grazing | Display | Toe Kicks**

# InteLED

Building Blocks of Light



A 780LED-STR-ALU

B 781LED-STR-ALU

C 782LED-STR-ALU

D 783LED-STR-ALU





The secret behind IntelLED's spot free light diffusion is our tightly spaced LED's ensuring a controlled light output and eliminates traditional hot spots on stone or shiny surfaces.



Available in warm 3000k and cool 4000k

### IntelLED LED modules

Finish: ALU	Certification Ceiling Dry Location CETL 									
Model	Wattage	Type	Base	Kelvin	Total Lumen	Nominal Lumen	Kelvin	Total Lumen	Nominal Lumen	Dimensions
A 780LED-STR-ALU	5w	LED	Module	3000k	350Lm	70Lm P/w	4000k	400Lm	80Lm per watt	L 12" W .875" H 1.25"
B 781LED-STR-ALU	10w	LED	Module	3000k	700Lm	70Lm P/w	4000k	805Lm	80.5Lm per watt	L 22.75" W .875" H 1.25"
C 782LED-STR-ALU	14w	LED	Module	3000k	1100Lm	78.5Lm P/w	4000k	1265Lm	90Lm per watt	L 39.5" W .875" H 1.25"
D 783LED-STR-ALU	18w	LED	Module	3000k	1400Lm	78Lm P/w	4000k	1610Lm	89Lm per watt	L 47" W .875" H 1.25"

**784PWB-WHT** Hardwire connection box with On/Off switch  
Can be mounted between modules or at either end of the track run.

Included with Romex connector

Finish: WH

Dimensions: H 1" L 4.75" W 2.6"

Certification Ceiling Dry CETL



**785PWC-WHT** 3ft Power Cord including Plug

Finish: WH

Dimensions: L 36"

Certification Ceiling Dry CETL




**786PWC-WHT** 6ft Power Cord including Plug

Finish: WH

Dimensions: L 72"

Certification Ceiling Dry CUL

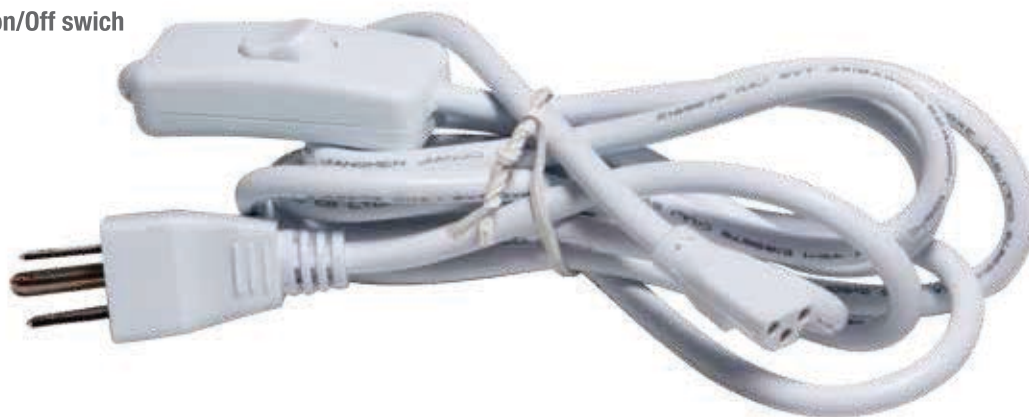

**789SPC-WHT** 6ft Power Cord with in-line on/Off switch

Finish: WH

Dimensions: L 72"

Certification Ceiling Dry CUL

**787CON-WHT** 12" Flex connector for interconnecting two modules

Finish: WH

Dimensions: L 12"

Certification Ceiling Dry CUL

**792CON-WHT** 6" Flex connector for interconnecting two modules

Finish: WH

Dimensions: L 6"

Certification Ceiling Dry CUL

**793CON-WHT** 9" Flex connector for interconnecting two modules

Finish: WH

Dimensions: L 9"

Certification Ceiling Dry CUL



**788BCON** Butt connector, for seamless connections between modules

Finish: WH

Certification Ceiling Dry CETL




**Included accessories** included with all LED module's

Hardwire connector to power the system

788CONN Butt connector for joining modules

Mounting Brackets

Moly plugs and screws

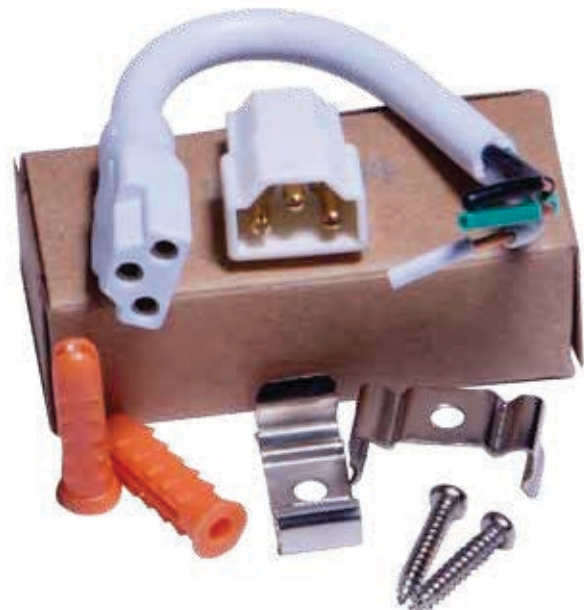

The pictures represented below were taken in a controlled environment using the same lighting and Stone surface

Typical under cabinet system with inherent reflections from spaced out High Output LED arrays



**InteLED**  
Building Blocks of Light

InteLED modules with tightly spaced LED array's ensuring controlled lumen output well distributed light pattern and glare free on Granite or other Stone surfaces.



Side by side comparison of the InteLED color temperatures



# Portables





BLU



PNK



SAT



WHT

**Tut Chi** General purpose touch controlled LED lantern, battery operated 3 AA cells for more than 38 hours of continuous use. Batteries not included.

Finish: BLU PNK SAT WHT

Model	Wattage	Type	Base	Kelvin	Lumen	Dimensions	Included
70007LED	12Lt x .2w	LED	Module	3500k	100Lm	D 4.2" H 8"	Lamps



BL

SAT



WHT



**FrogLED** General purpose LED spotlight with fully pivotal head and On/Off switch

<b>Finish:</b> BL SAT WHT	<b>Certification</b> Ceiling Dry Location CETL 						
<b>Model</b>	<b>Wattage</b>	<b>Type</b>	<b>Base</b>	<b>Kelvin</b>	<b>Lumen</b>	<b>Dimensions</b>	<b>Included</b>
<b>87000LED</b>	1Lt x 4w	MR-16 LED	GU-5.3	3000k	215Lm	<b>D 4.25" H 4"</b>	Lamp, Plug-In transformer





# Midi Pendant

## Midi Pendant Component System



A selection of corded and rod suspensions in Incandescent and Fluorescent lamping options.

Multi light bars and circular canopies.

Compatible mouth blown glass shades in a variety of finishes.





### Julia Fluorescent Rod Pendant

Finish BS ORB					
Canopy Dimensions: D 5.25" H 1.4"					
Included Rods 6"16"22", 10ft Cord, Integral Slope Adapter, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
23086FC-___	1Lt x 18w	Spiral	GU-24	2700k	1250Lm
Certification Ceiling Dry CUL  					





### Tali Fluorescent Cord Pendant

Finish BS ORB					
Canopy Dimensions: D 5.25" H 1.4"					
Included 12ft Clear Cord with BS Black Cord with ORB, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
23088FC-___	1Lt x 18w	Spiral	GU-24	2700k	1250Lm
Certification Ceiling Dry CUL  					




### Shava Fluorescent Cord Pendant

Finish BS					
Canopy Dimensions: D 5.25" H 1.4"					
Included 12ft Clear Cord, Lamps, Spider ring and pins					
Model	Wattage	Type	Base	Kelvin	Lumen
23091-___	1Lt x 18w	Spiral	GU-24	2700k	1250Lm
Certification Ceiling Dry CUL  					




### Janine Incandescent Rod Pendant

Finish BS ORB					
Canopy Dimensions: D 5.25" H 1.4"					
Included Rods 6"16"22", 10ft Cord, Integral Slope Adapter					
Model	Wattage	Type	Base	Kelvin	Lumen
23087FC-___	1Lt x 100w	A-19	E-26		
Certification Ceiling Dry CUL 					




### Sydney Incandescent Cord Pendant

Finish BS ORB					
Canopy Dimensions: D 5.25" H 1.4"					
Included 12ft Clear Cord with BS Black Cord with ORB					
Model	Wattage	Type	Base	Kelvin	Lumen
23089FC-___	1Lt x 100w	A-19	E-26		
Certification Ceiling Dry CUL 					



### Ami Adjustable Incandescent Cord Pendant

Finish BS Adjustable fitter for balancing uneven Shades					
Canopy Dimensions: D 5.25" H 1.4"					
Included 12ft Clear Cord and Cable					
Model	Wattage	Type	Base	Kelvin	Lumen
23095-___	1Lt x 100w	A-19	E-26	_	_
Certification Ceiling Dry CUL 					

### 52023 Trinity 3 Light Incandescent Bar Pendant

Finish BS ORB					
Canopy Dimensions: L 28" W 2.75" with floating J-Box cover					
Included 12ft Clear Cord with BS Black Cord with ORB					
Model	Wattage	Type	Base	Kelvin	Lumen
52023-___	3Lt x 60w	A-19	E-26		


Certification Ceiling Dry CUL 




### 52024 Trinity 4 Light Incandescent Bar Pendant

Finish BS ORB					
Canopy Dimensions: L 36" W 2.75" with floating J-Box cover					
Included 12ft Clear Cord with BS Black Cord with ORB					
Model	Wattage	Type	Base	Kelvin	Lumen
52024-___	4Lt x 60w	A-19	E-26		

Certification Ceiling Dry CUL 

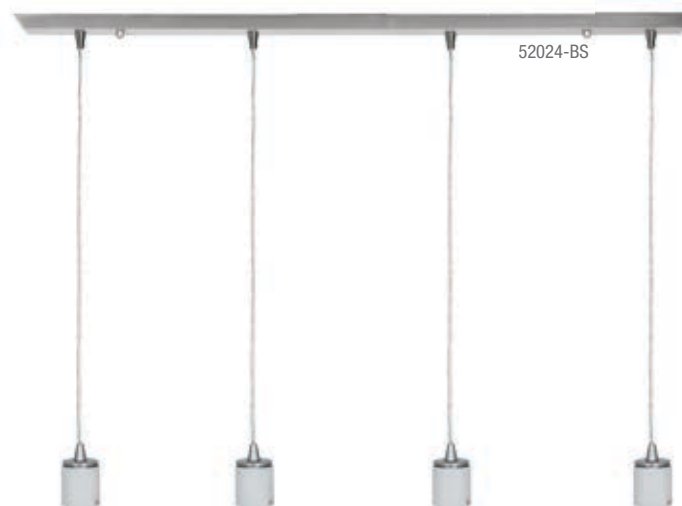


### 52026 Quadra 3 Light Fluorescent Bar Pendant

Finish BS ORB					
Canopy Dimensions: L 28" W 2.75" with floating J-Box cover					
Included 12ft Clear Cord with BS Black Cord with ORB, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
52026-___ 	3Lt x 18w	Spiral	GU-24	2700k	3750Lm

Certification Ceiling Dry CUL 



### 52027 Quadra 4 Light Fluorescent Bar Pendant

Finish BS ORB					
Canopy Dimensions: L 36" W 2.75" with floating J-Box cover					
Included 12ft Clear Cord with BS Black Cord with ORB, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
52027-___ 	4Lt x 18w	Spiral	GU-24	2700k	5000Lm

Certification Ceiling Dry CUL 



### 52230 Trinity Tres Pod Incandescent Pendant

Finish BS ORB					
Canopy Dimensions: D 11" H 1"					
Included 12ft Clear Cord with BS Black Cord with ORB					
Model	Wattage	Type	Base	Kelvin	Lumen
52230	3Lt x 60w	A-19	E-26		

Certification Ceiling Dry CUL 



### 52232 Trinity Cinco Pod Incandescent Pendant

Finish BS ORB					
Canopy Dimensions: D 14" H 1"					
Included 12ft Clear Cord with BS Black Cord with ORB, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
52232	5Lt x 60w	A-19	E-26		

Certification Ceiling Dry CUL 

### 52028 Quadra Tres Pod Fluorescent Pendant



Finish BS ORB					
Canopy Dimensions: D 11" H 1"					
Included 12ft Clear Cord with BS Black Cord with ORB, Lamps					
Model	Wattage	Type	Base	Kelvin	Lumen
52230GU	3Lt x 18w	Spiral	GU-24	2700k	3750Lm

Certification Ceiling Dry CUL 




**2 3 1 0 4 Inari Silk Martini Midi  
Pendant Glass Shade**

Finish	AMB COB RED WHT
Dimensions	D 7" H 6"

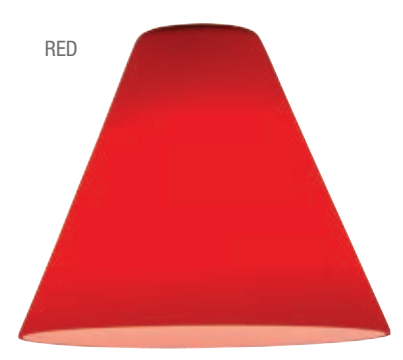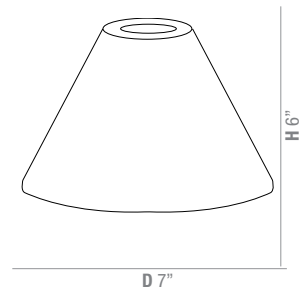



**2 3 1 1 1 Merlot Midi  
Pendant Glass Shade**

Finish	ASKY RUSKY
Dimensions	D 3.5" H 8"

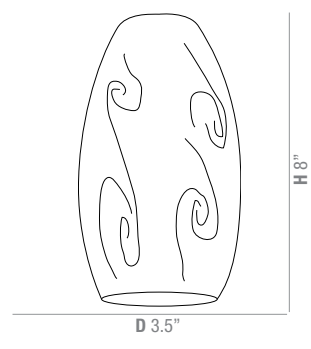


**2 3 1 1 2 Inari Silk Champagne Midi Pendant Glass Shade**

Finish	AMST ASKY BRST CRM ICA MYA OPL RED WHST
Dimensions	D 5" H 9"

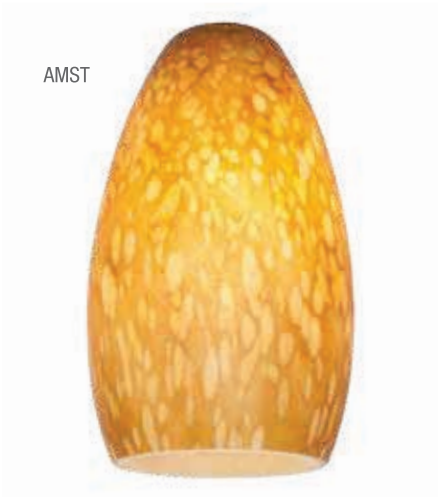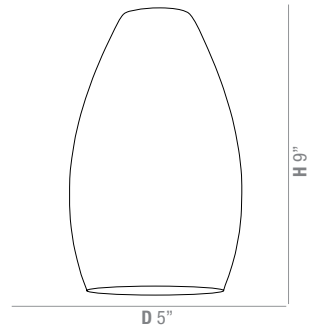

**2 3 1 1 8 Inari Silk Pinot Midi Pendant Glass Shade**

<b>Finish</b>	AMB COB OPL RED WAMB WRED WWHT
<b>Dimensions</b>	D 5.25" H 7.5"

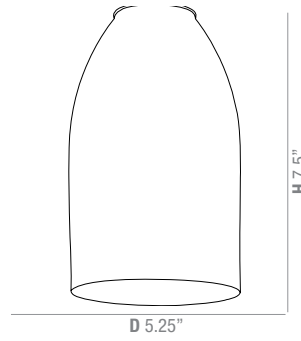

**23118 Mat Glass Finishes**




**23118 Wicker Textured Glass Finishes**






**2 3 1 2 3** Brandy FireBird Midi  
Pendant Glass Shade

Finish	AMBFB ASKY LGRFB RUSKY PLMFB WHTFB
Dimensions	D 6" H 9"




AMBFB

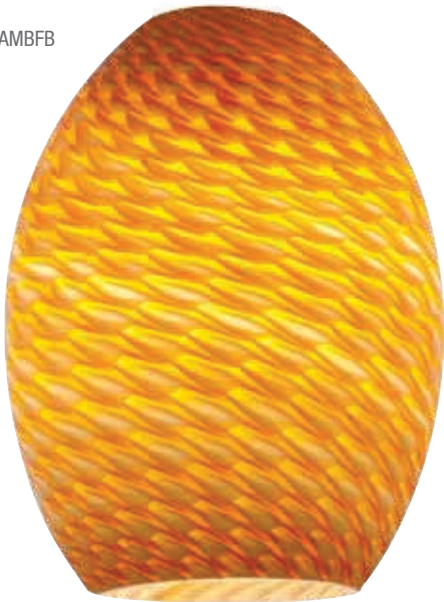

ASKY



LGRFB

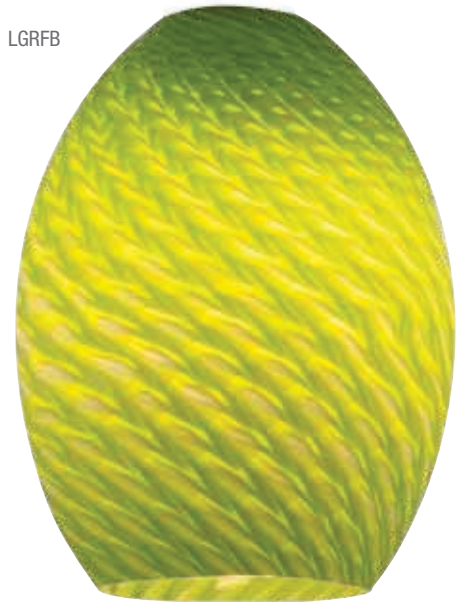

RUSKY



PLMFB




WHTFB



**2 3 1 2 4 Cabernet Midi  
Pendant Glass Shade**

Finish	AMS BRS SDS
Dimensions	D 4.9" H 12"

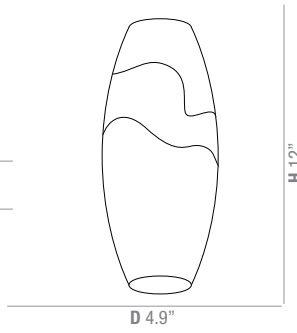


**Stone Glass Finish**




**9 7 0 G G Cognac Midi  
Pendant Glass Shade**

Finish	AMB WHT
Dimensions	D 4.75" H 10.25"

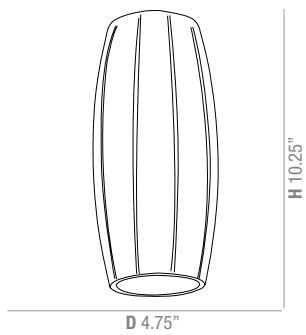

**2 3 1 3 0 Cylinder Midi Pendant Glass Shade**

Finish	AMB OPL RED
Dimensions	D 4" H 10"

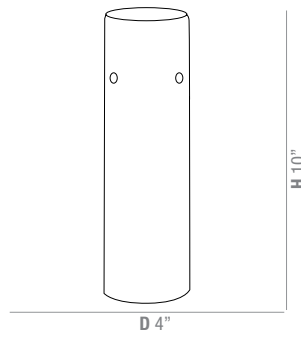

AMB



OPL




RED



**2 3 1 3 3 Glass in Glass Midi Cylinder Pendant Shade**

Finish	CLAM CLOP CLRD
Dimensions	D 4.5" H 10"

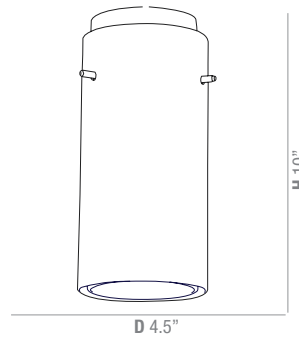

CLAM



CLOP




CLRD



**2 3 1 2 2 Inari Silk Flute Midi  
Pendant Glass Shade**

Finish	LGR
Dimensions	D 5.5" H 6.5"

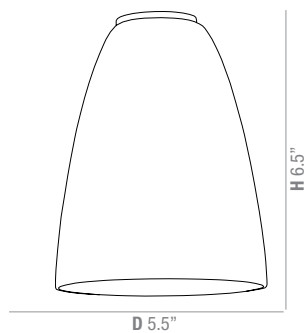


LGR



**9 6 9 S T Sherry Midi  
Pendant Glass Shade**

Finish	AMB OPL
Dimensions	D 4.5" H 6"

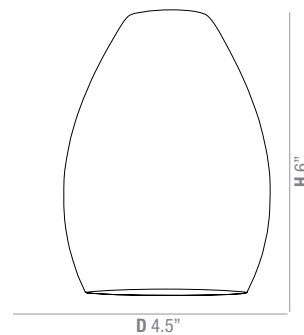

AMB




OPL



**9 7 8 S T Chianti Midi  
Pendant Glass Shade**

Finish	PLS PLC
Dimensions	D 4.75" H 7"

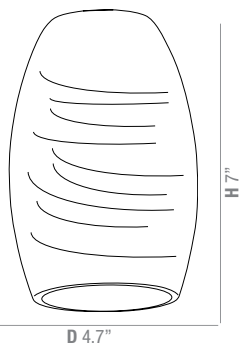

PLS



PLC



# Mini Pendant



## Mini Pendant Component System

- A selection of Line and Low Voltage pendant assemblies.
- Multiple lamping options available LED, Line Voltage Halogen and Low voltage Halogen.
- All Low Voltage Halogen incorporate the Uni-Jack fitter for use in all UJ canopies.
- Compatible Mini pendant glass shades.



903UJ-BS

**Zeta 12v Halogen Pendant**

Multiple Canopy options available Pg 271, 272

Finish BRZ BS

Canopy Dimensions: Multiple Canopy options available

Included 10ft Clear Coated Co-Axial with BS Black with BRZ, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
903UJ-___	1Lt x 35w	JC	GY 6.35	2900k	600Lm

Certification Ceiling Dry CETL 



70012LED-BRZ

**Tungsten LED Pendant**

Projected downlight and 3/4 glass illumination

Finish BRZ BS

Canopy Dimensions: D 4.5" H 2"

Included 12ft Clear Cord with BS Black Cord with ORB, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
70012LED-___	1Lt x 4w	LED	Module	3000k	370Lm

Certification Ceiling Dry CETL 



70012LED360-BS

**Tungsten360 LED Pendant**

Full Glass Illumination with included lens

Finish BRZ BS

Canopy Dimensions: D 4.5" H 2"

Included 12ft Clear Cord with BS Black Cord with ORB, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
70012LED360	1Lt x 4w	LED	Module	3000k	370Lm

Certification Ceiling Dry CETL 



908UJ-BS

**Omega 12v Halogen Pendant**

Multiple Canopy options available Pg 271, 272

Finish BRZ BS

Canopy Dimensions: Multiple Canopy options available

Included 10ft Clear Coated Co-Axial with BS Black with BRZ, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
908UJ-___	1Lt x 35w	JC	GY 6.35	2900k	600Lm

Certification Ceiling Dry CETL 



9032LV-BS

**Omega LV 120v Halogen Pendant**

Line Voltage no transformer required

Finish BRZ BS

Canopy Dimensions: D 4.5" H 1"

Included 10ft Clear Coated Cord, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
9032LV-___	1Lt x 40w	JCD	G-9	2900k	480Lm

Certification Ceiling Dry CETL 



909UJ-BS

**Xi 12v Halogen Pendant**

Low profile fitter to highlight glass shade

Finish BRZ BS

Canopy Dimensions: Multiple Canopy options available Pg 271,2

Included 10ft Clear Coated Co-Axial with BS Black with BRZ, Lamp

Model	Wattage	Type	Base	Kelvin	Lumen
909UJ-___	1Lt x 35w	JC	GY 6.35	2900k	600Lm

Certification Ceiling Dry CETL 

### 87105UJ Flat low profile Uni-Jack System Mono-Pod

Included with class-2 transformer for mounting within the J-Box

Finish Available: BRZ BS

Dimensions: D 4.5" H 0.5"

Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 



BS



BRZ

### 87106UJ Dome shaped surface canopy Uni-Jack System Mono-Pod

Transformer incorporated within the canopy

Finish Available: BRZ BS

Dimensions: D 4.5" H 4.5"

Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 



BS



BRZ

### 87107UJ Sphere shaped surface canopy Uni-Jack System Mono-Pod

Transformer incorporated within the canopy

Finish Available: BRZ BS

Dimensions: D 4.5" H 4.5"

Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 



BS



BRZ



### 87203UJ Uni-Jack Plug

Compatible with all Uni-Jack canopies and pendant assemblies

Finish Available: BRZ BS

Plug Dimensions: D 0.4" H 1"

Minimum Wattage: 50w



### 87122UJ Three Port Bar Pendant

Transformer incorporated within the canopy

Finish Available: BRZ BS


Dimensions: L 36" W 1.5"

Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 

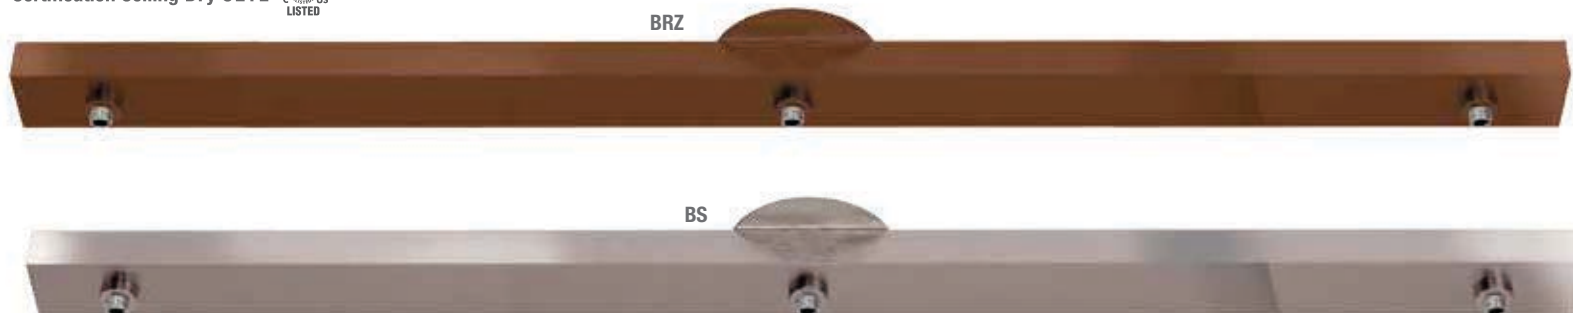

### 87120UJ Three-Port round canopy

Transformer incorporated within the canopy

Finish Available: BRZ BS

Dimensions: D 12" H 1.5"

Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 



### 87121UJ Five-Port round canopy

Transformer incorporated within the canopy

Finish Available: BRZ BS


Dimensions: D 18" H 1.5"


Minimum Wattage: 50w Low voltage Halogen Lamps only

Dimmable: Yes

Compatible Pendants see Pg 268 -269

Certification Ceiling Dry CETL 

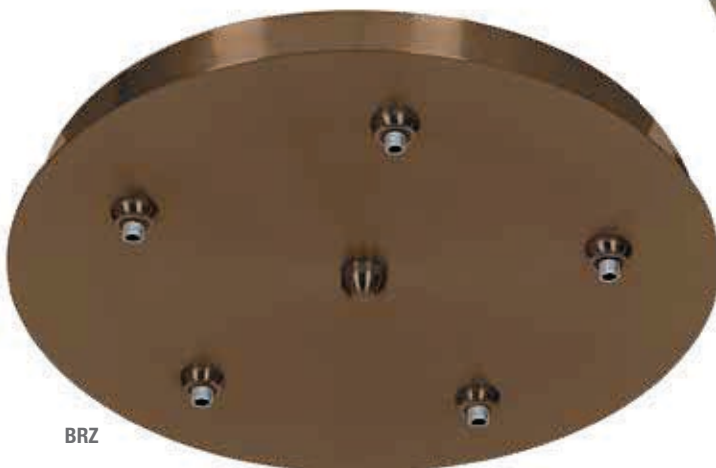

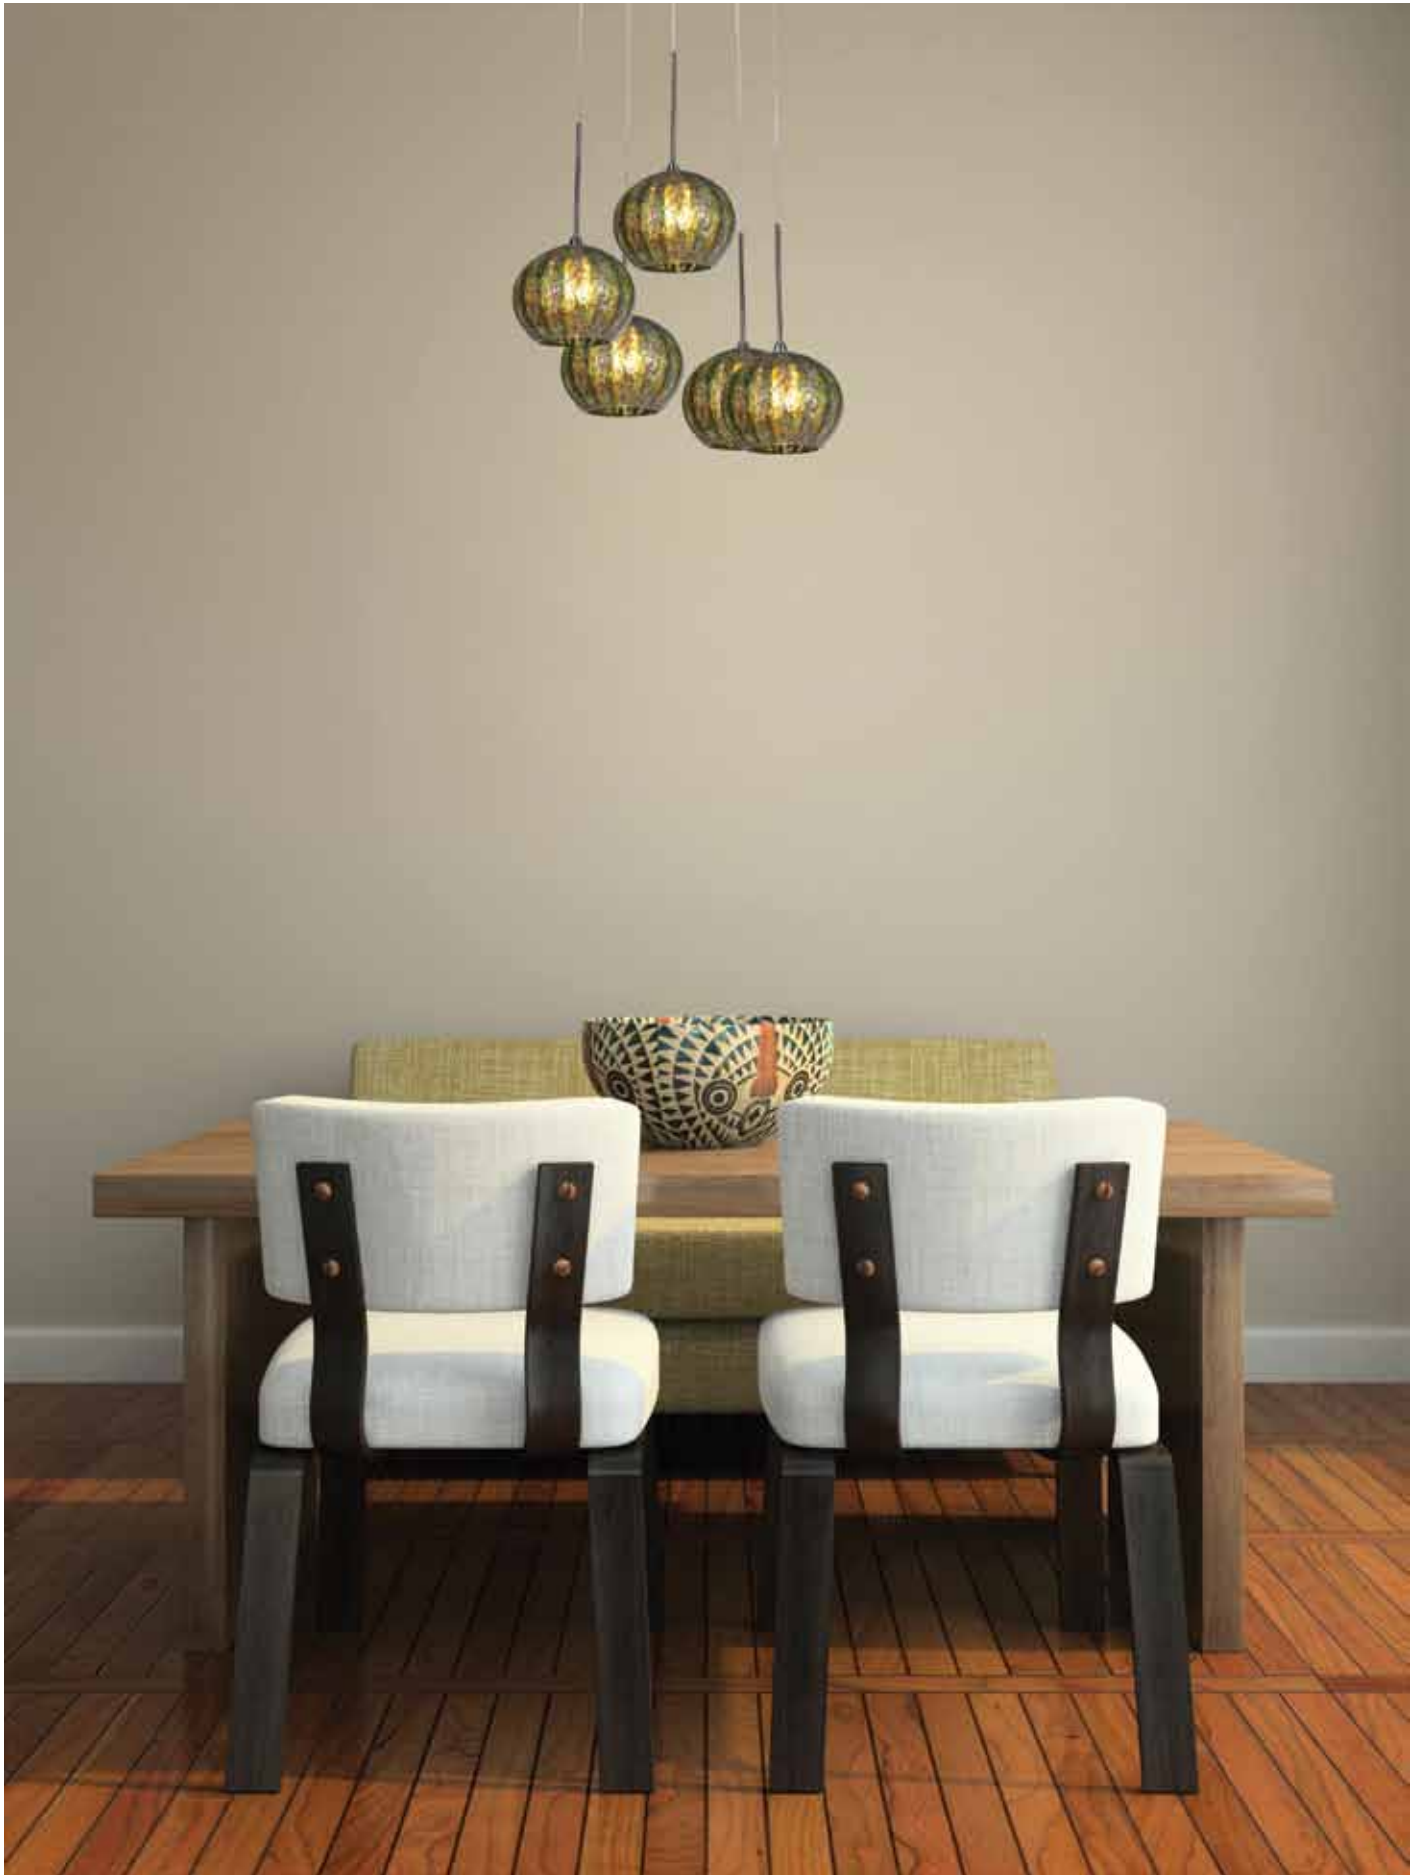

**5 3 1 R J** **Bella Teardrop Mini  
Pendant Glass Shade**


**Finish** | WTP

**Dimensions** | D 2.5" H 9"

**Fitter** | Requires three prong spider ring

Compatible with the following mini pendants Pg 268-269

70012LED	903RT	908RT
909UJ	906RT	9032LV

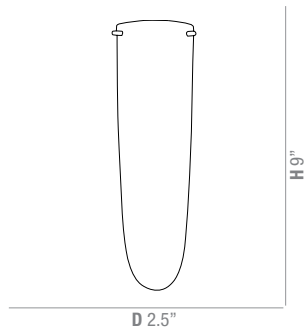

**8 9 1 1 9** **Mania Conical Mini  
Pendant Glass Shade**


**Finish** | COB FST RED

**Dimensions** | D 4" H 5"

**Fitter** | 22mm


Compatible with the following mini pendants Pg 268-269

70012LED	903RT	908RT
909UJ	906RT	9032LV

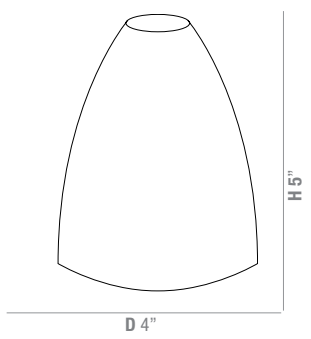



**8 9 1 2 1**      **Techno Metal Mini  
Pendant Glass Shade**

<b>Finish</b>	<b>BSC</b>	
<b>Dimensions</b>	<b>D 5.25" H 3.8"</b>	
<b>Fitter</b>	22mm	
Compatible with the following mini pendants Pg 268-269		
70012LED	903RT	908RT
909UJ	906RT	9032LV

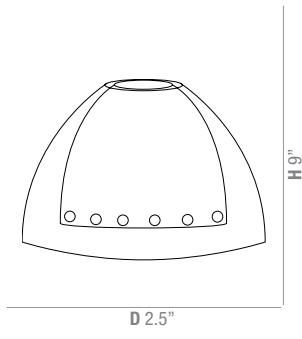

**9 1 8 S T**      **Hermes Square Mini  
Pendant Glass Shade**


<b>Finish</b>	<b>OPL AMB</b>	
<b>Dimensions</b>	<b>W 3" x 3" H 3.5"</b>	
<b>Fitter</b>	22mm	
Compatible with the following mini pendants Pg 268-269 with exception of 70012LED		
	903RT	908RT
909UJ	906RT	9032LV

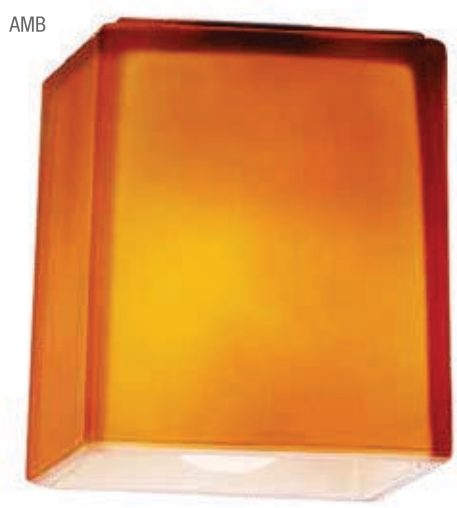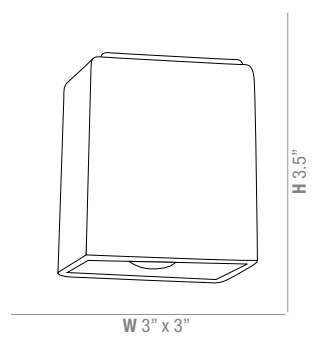

## 9 2 0 S T

### Thea Curve Mini Pendant Glass Shade

Finish	OPL	
Dimensions	L 6" W 2.25" H 4.7"	
Fitter	22mm Fitter	
Compatible with the following mini pendants Pg 268-269 with exception of 70012LED		
	903RT	908RT
909UJ	906RT	9032LV





OPL



## 9 8 0 0 P R



### Safari Opaline Pendant Glass Shade

Finish	GRO RRO SAO SARO	
Dimensions	D 5" H 3.5"	
Fitter	22mm	
Compatible with the following mini pendants Pg 268-269		
70012LED	903RT	908RT
909UJ	906RT	9032LV

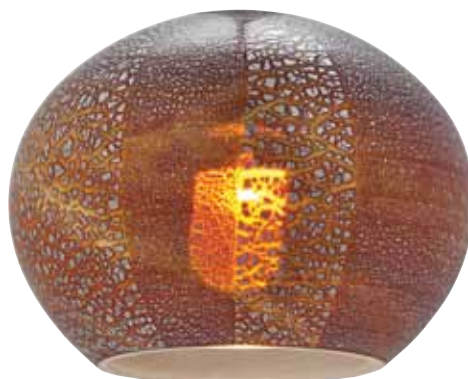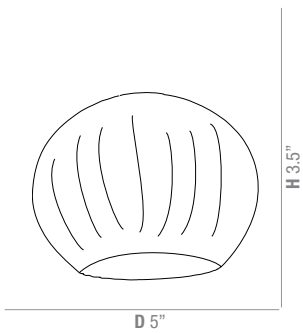


# 9 3 2 V Inari Cylinder Pendant Glass Shade

<b>Finish</b>	AMB COB OPL WHTLN BLULN REDLN BLKLN PLM	
<b>Dimensions</b>	D 3" H 10"	
<b>Fitter</b>	Requires three prong spider ring	
Compatible with the following mini pendants Pg 268-269		
70012LED	903RT	908RT
909UJ	906RT	9032LV

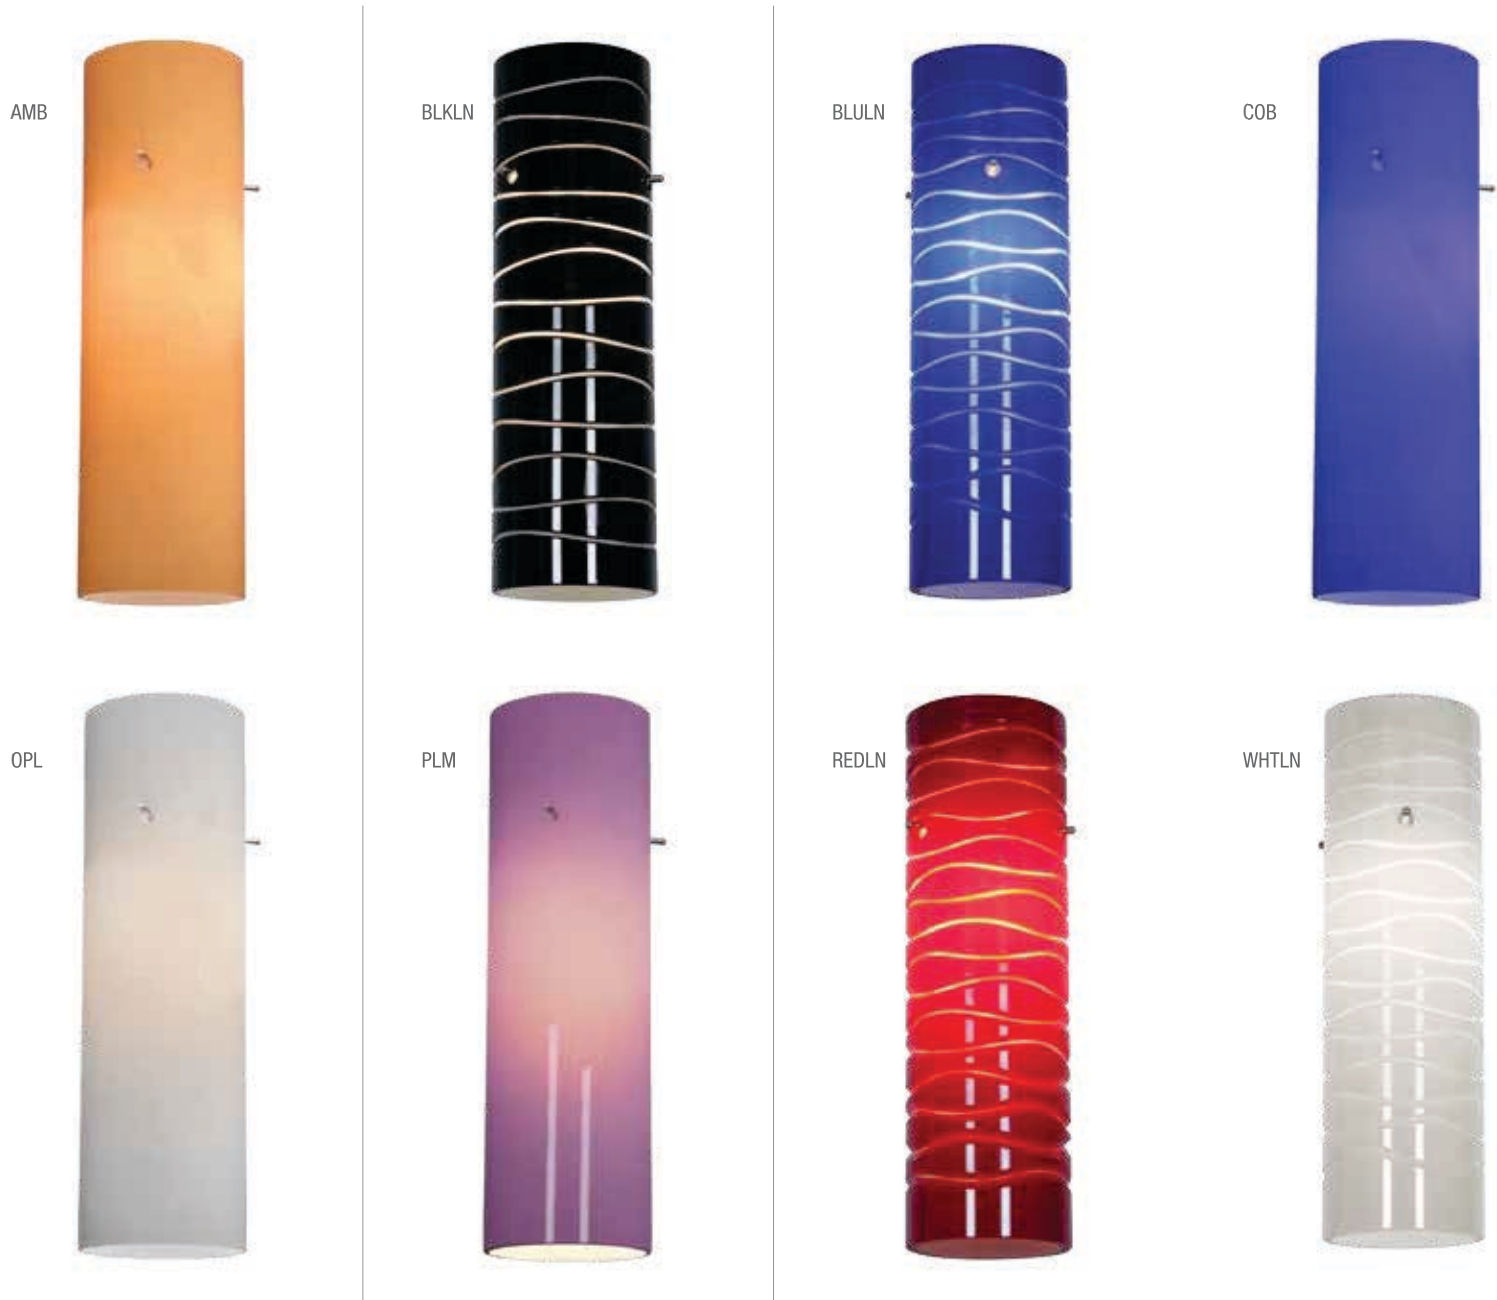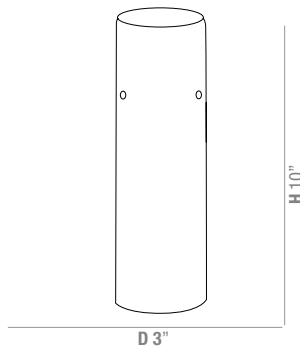


**9 3 7 I T** Cavo Italian Wire Mini Pendant Glass Shade

Finish	CRY BLC ORO MTL
Dimensions	D 4.75" H 8.5"
Fitter	Requires three prong spider ring
Compatible with the following mini pendant	
909UJ	

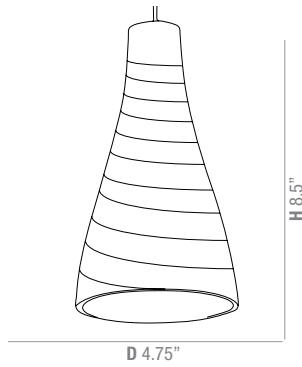

**9 4 1 R J** Fire Cone Mini Pendant Glass Shade

Finish	AMM	
Dimensions	D 4" H 4.9"	
Fitter	22mm Fitter	
Compatible with the following mini pendants Pg 268-269		
70012LED	903RT	908RT
909UJ	906RT	9032LV

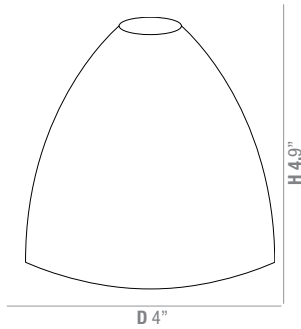



**9 4 2 R J Fire Dome Mini Pendant Glass Shade**


<b>Finish</b>	AMM
---------------	-----

<b>Dimensions</b>	D 5" H 4.4"
-------------------	-------------

<b>Fitter</b>	22mm Fitter
---------------	-------------

Compatible with the following mini pendants Pg 268-269

70012LED	903RT	908RT
909UJ	906RT	9032LV

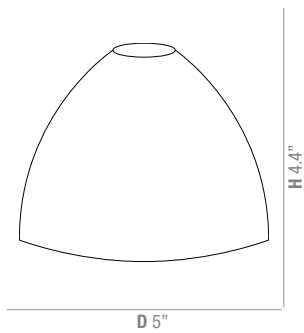

**9 7 7 G G Tungsten Iridescent Mini Pendant Glass Shade**



<b>Finish</b>	IRD
---------------	-----

<b>Dimensions</b>	D 4" H 11"
-------------------	------------

<b>Fitter</b>	Requires three prong spider ring
---------------	----------------------------------

Compatible with the following mini pendants Pg 268

70012LED		
----------	--	--

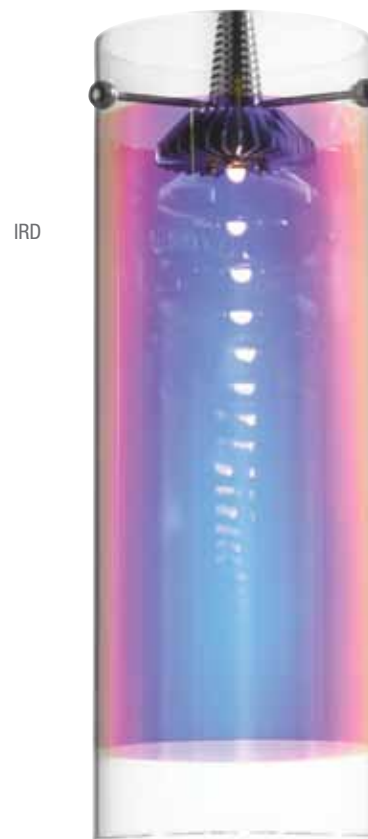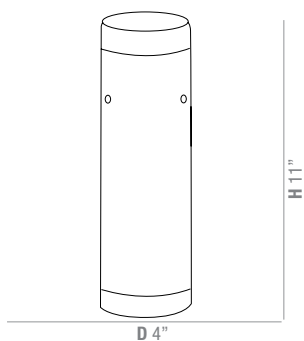

### MR-16LED 30 deg beam angle

<b>Wattage:</b> 4w
<b>Lumen Output:</b> 215Lm
<b>Kelvin:</b> 3000k
<b>CRI:</b> 85
<b>Base:</b> GU-5.3
<b>Voltage:</b> 12v AC or DC
<b>Life Expectancy:</b> 25 years operating at 3 hours per day
<b>Dimmable:</b> No

Certification Ceiling Dry CETL 



Image not actual size

### G4LEDSMD1.5W

LED Corn Bulb, full 360 deg illumination

<b>Wattage:</b> 1.5w
<b>Lumen Output:</b> 95Lm
<b>Kelvin:</b> 3000K
<b>CRI:</b> 83
<b>Base:</b> G-4
<b>Voltage:</b> 12v AC or DC
<b>Life Expectancy:</b> 25000 hours
<b>Dimmable:</b> No

Certification Ceiling Dry CETL 



Image not actual size

### G9-48W120V/ER

Energy Reduction Xenon lamp with enhanced light output. Patented pinch technology eliminates the need for lamp cover.


<b>Finish:</b> FR Frost or CL Clear
<b>Wattage:</b> 48w
<b>Lumen Output:</b> 740Lm
<b>Kelvin:</b> 2900k
<b>CRI:</b> 100
<b>Base:</b> G-9
<b>Voltage:</b> 120v AC
<b>Life Expectancy:</b> 2000 hours
<b>Dimmable:</b> Yes



Image not actual size



Image not actual size

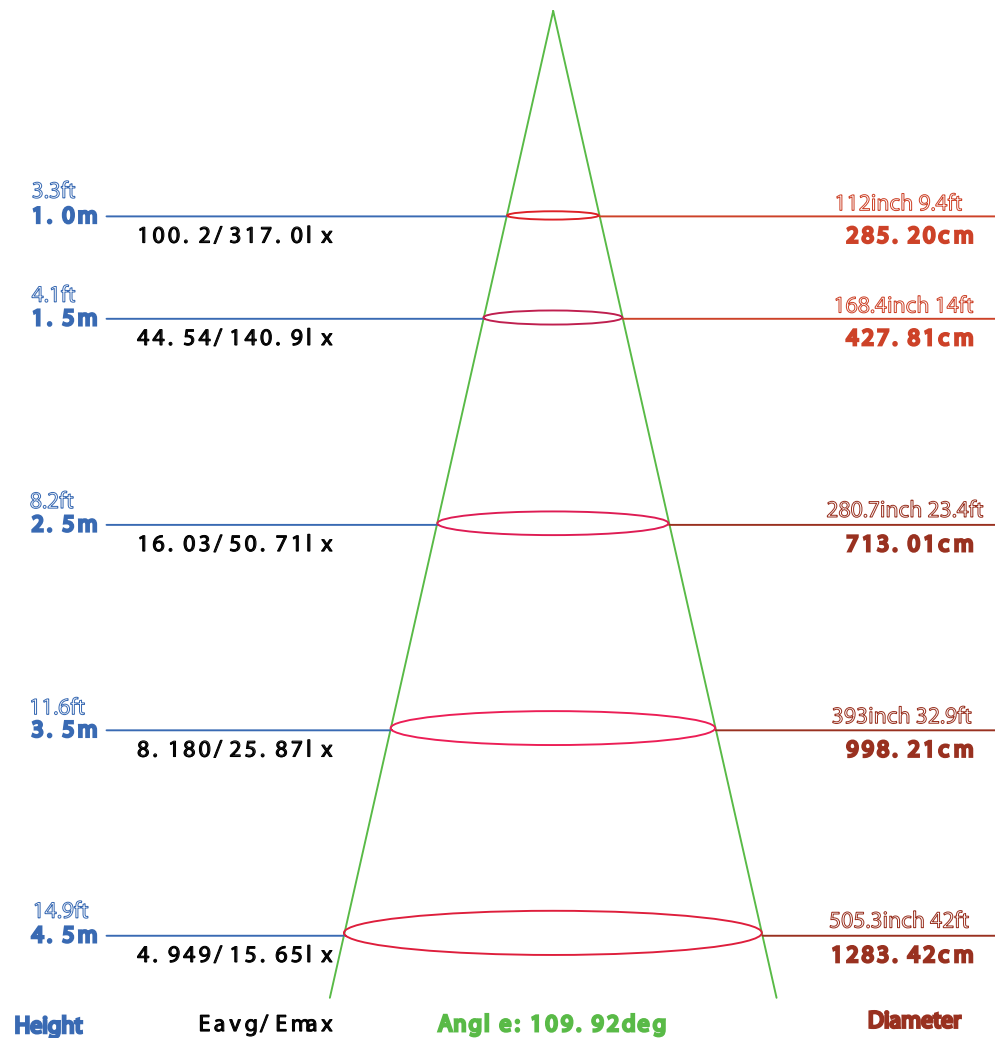

### GX-53LED-120v

<b>Wattage:</b> 13w
<b>Lumen Output:</b> 1200Lm
<b>Kelvin:</b> 3000k
<b>CRI:</b> 85
<b>Base:</b> GX-53
<b>Voltage:</b> 120v AC
<b>Life Expectancy:</b> 40000 hours
<b>Dimmable:</b> Yes


Certification Ceiling Dry CETL 

## LED Facts


- LED's or Light Emitting Diodes were discovered in the 1920's by a Russian Technician Oleg Losev.
- Until 1968 the production of LED's were extremely costly and used only in expensive test equipment.
- Mass production of LED's began in 1968, primarily red, and used for indicator lights.
- The development of LED's has increased in efficiency and light output is doubling every 36 months.
- LED's are used in many of our day-to-day appliances, dramatic leaps have been achieved creating many types of functional light from this tiny device.
- This burgeoning technology is expected to exceed \$15 billion per year as we adapt our traditional incandescent light sources to LED's.

### Did you know that LED's are actually a very simple diode;

Power runs through the diode from the **P** positive side to the **N** Negative side.

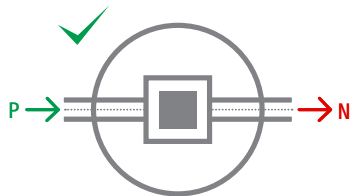

LED's cannot run in reverse, connecting a diode out of phase could damage the LED.

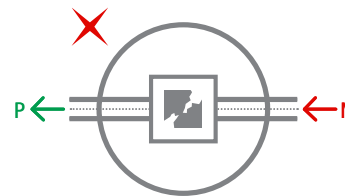

A common material used to create the Diode is Gallium Nitride (GaN) grown on a Silicon substrate then "Doped", impregnated with impurities to give the Diode incandescent properties. When power travels through the Diode photon losses occur which is emitted as light. To protect the fragile diode, it is fully encapsulated with an epoxy casing, which gives the Diode its characteristic Dome shape.

Most of the "White" LED's that are manufactured today use a "Blue" LED coated with Phosphor, which not only alters the color temperature and Lumen output but has a direct effect on the power and thermal management of the diode. The warmer the color, the greater amount of Phosphor used.

High power LED's (HP LED) can be driven at currents from hundreds of mA to more than an ampere. All LED's require a DC (direct current) power supply or "driver". It is essential that the correct driver matches the operating conditions specified by the LED manufacture, this will ensure that the LED is not over driven causing significant heat gain and premature failure.

## What Are the Advantages of LED's?

- Energy consumption is dramatically reduced
- Reduce carbon footprint by as much as 85%.
- Lumen output is considerably higher than Incandescent lamps.
- A high quality 6w LED can produce the same Lumen output as a 40w Incandescent lamp
- Yearly operating costs reduce from \$19.92 per incandescent lamp to \$2.04 per LED lamp
- High quality LED's will exceed 50Lm per watt, incandescent lamps average 14 Lm per watt.

# Sustainability

- LED's are the most efficient light source available today.
- Incandescent lamps have an average life of 850 hours, LED's exceed 35,000 hours.
- Environmentally safe, LED's do not contain mercury and are easily recycled.
- LED's conserve more than 70% of their original light output.
- Minute carbon footprint makes the LED's a great source for developing exciting modern luminaires.

# Terminology

**LED:** "Light emitting diode" A diode is an electronic component that allows current to flow in a single direction

**Drivers:** Constant Current is the preferred method for providing power to HP LED arrays.


Constant Voltage drivers are mainly used in multiple Low Power chip arrays such as LED strips and tape light where current limiting resistors are used to control the current.

Constant Voltage drivers are generally less expensive than Constant Current drivers.


**Dimming:** It is currently difficult to dim single chip HP LED's, and most dimmable drivers only support higher wattage LED's, however with the rapid leaps in technology an inexpensive dimming solution will be available shortly.

**Heat Management:** heat is a major destructive element in the manufacture of HP LED's and effective heat sinks are necessary to ensure the temperature is maintained below critical mass ensuring the LED's function and perform to their specification and achieve their life expectancy with less than 30% degradation over its life cycle.

## LED Anatomy

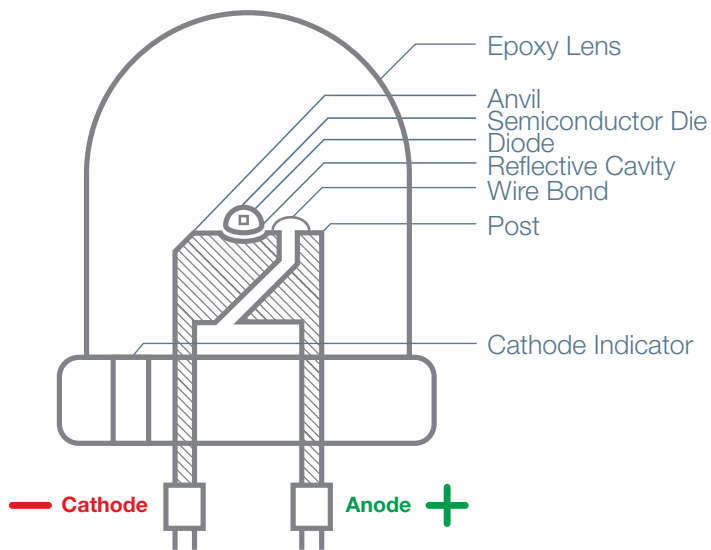

## UML Symbol

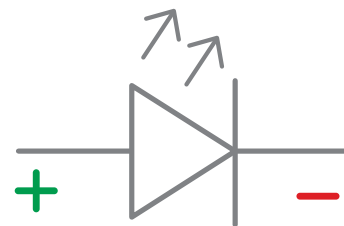

# Index






















MODEL	PG#	Model	PG#	MODEL	PG#	MODEL	PG#
20290	222	20422	177	20725	143	23130	265
20291	224	20435	167	20726	143	23133	265
20292	223	20436	167	20738	27 92	23218UJ	119
20294	222	20439	178	20739	27 178	23425	86
20296	223	20440	178	20740	140	23426	86
20300MG	226	20441	167	20741	141	23633	69
20301	228	20442	167	20742	164	23636	89
20302MG	226	20444	243	20745GU	146	23637	89
20330	229	20445	177	20746GU	146	23733	100
20333MG	231	20446	177	20747GU	146	23760	114 115
20335MG	231	20447	177	23019	160	23762	92
20337MG	224	20449	232	23020GU	160	23764	156
20342MG	227	20450	232	23021	160	23765	76
20343MG	227	20452GU	38 206	23022	161	23770	77
20344MG	227	20453GU	38 206	23023	161	23831	189
20346MG	233	20454GU	38 206	23024	161	23832	189
20347MG	233	20456GU	36 140	23025MG	240	23833	189
20350MG	238	20457GU	36 140	23026MG	240	23834	189
20351MG	238	20458GU	36 140	23060MGLED	234	23901	207
20352MG	239	20460GU	37 136	23061MGLED	234	23903	207
20355MG	225	20462GU	37 82	23062MGLED	236	23904	207
20356MG	225	20463GU	37 82	23063MGLED	236	23905	99
20362	230	20624	141	23064MGLED	235	23906	188
20363	242	20625	141	23071	136	23907	188
20364	242	20626	141	23072	80	23908	188
20367MG	244	20635	174	23073	80	23910	190
20368MG	244	20650	142	23074	81	23911	190
20370MG	230	20651	142	23086FC	256	23912	190
20373	228	20652	142	23087FC	257	23916	191
20375MG	229	20656	158	23088FC	256	23917	191
20384MG	241	20657	159	23089FC	257	23918	191
20385MG	241	20658	159	23091	256	23920	192
20389MG	243	20660	174	23095	257	23921	192
20394LED	235	20661	142	23104	260	23922	192
20414	174	20662	143	23111	260	23923	192
20415	181	20670	16 145	23112	261	23924	134
20416	181	20671	16 145	23118	262	23950	88
20417	174	20672	16 145	23122	266	23951	88
20420	181	20673	17 62	23123	263	23952	88
20421	181	20724	143	23124	264	23970	175

MODEL	PG#	Model	PG#	MODEL	PG#	MODEL	PG#
23980	53	50038	152	50183	172	51008	9 61
28004	102	50041	162	50184	172	51011	193
28011	103	50046	162	50185	172	51012	193
28012	104	50049	162	50186	18 144	51013	193
28018	105	50050	163	50187	18 144	51014	193
28022	106	50056	154	50188	18 144	51016	98
28023	107	50057	154	50189	18 144	51017	98
28024	108	50058	154	50190	19 63	52001	122
28030	109	50059	154	50191	19 63	52023	258
28033	110	50060	163	50441	32 74	52024	258
28069	111	50061	163	50443	33 75	52026	259
28070	112	50063	163	50444	32 74	52027	258
28078	113	50069	159	50451	137	52028	259
28085	116	50070	159	50454	66	52029	48
28087	116	50071	155	50465	52	52030	46
28088	116	50072	155	50466	52	52031	47
30110	214	50073	155	50480	24 164	52032	46
30111	214	50079	147	50481	25 137	52033	47
31002	217	50080	147	50483	24 173	52034	46
31003	217	50081	147	50484	25 66	52035	47
31004	214	50090	29	50501	95	52042	48
31005	214	50091	28 153	50505	168	52043	48
31006LEDD	216	50092	28 153	50509	58	52045	65
31007LEDD	216	50093	28 153	50510	58	52052	123
31010	216	50107	22 73	50511	34 173	52062	93
31011	216	50108	23 72	50514	93	52063	169
31012	71	50110	23 72	50518	94	52070	97
31017	70	50120	10 157	50525	96	52072UJ	120
31021	215	50121	10 157	50526	96	52075UJ	121
31022	215	50123	11 68	50543	94	52102	97
31025	179	50124	11 68	50550	34 173	52103	44
31026	150	50127	155	50560	168	52133	45
31027	150	50129	67	50561	168	52203	44
31028	151	50130	26 152	50562	27 169	52204	45
31029	150	50131	26 153	50564	168	52205	44
31030	151	50145	87	50565	169	52206	45
31032	215	50146	87	50566	166	52220	43
31033	215	50160	20 158	50567	166	52221	42
50020	162	50161	20 158	50956	14 156	52222	43
50029	148	50162	20 158	50957	14 156	52223	42
50030	148	50163	21 62	50958	15 83	52224	43
50031	148	50170	65	50959	15 83	52226	42
50032	148	50175	197	50963	15 95	52232FC	259
50033	149	50177	197	51000	7 60	531RJ	274
50034	149	50178	197	51001	7 60	53301	198
50035	149	50180	64	51002	8 134	53302	198
50036	152	50181	64	51003	8 134	53303	198
50037	152	50182	172	51007	9 61	53304	198

MODEL	PG#	Model	PG#	MODEL	PG#	MODEL	PG#
53311	210	62218	179	63815-18	200	793CON	249
53313	210	62229	171	63815-19	201	87000LED	253
53314	210	62230	171	63815-20	202	87105FCUJ	270
53340	176	62231	212	63815-41	203	87106UJ	270
53341	176	62232	171	63815-46	204	87107UJ	270
55501	157	62233	212	63815-47	205	87120UJ	272
55502	157	62234	212	63951	13 164	87121UJ	272
55504	135	62235	179	63953	13 164	87122UJ	271
55505	135	62236	179	63957	12 79	87203UJ	271
55506	135	62251	194	63958	12 79	89119	274
55530	6 175	62252	194	63959	12 79	89121	275
55531	6 175	62253	194	63960	13 138	9032LV	269
55532	4 56	62254	194	63961	13 138	903UJ	268
55533	4 56	62255	220	63962	12 55	908UJ	269
55534	5 57	62256	220	70003LED	184	909UJ	269
55540	182	62257	220	70007LED	252	918ST	275
55541	182	62258	195	70012LED	268	920ST	276
55542	50	62259	195	70012LED360	268	932V	277
55543	50	62260	195	70017LED	185	937IT	278
55545	84	62262	195	70025LED	183	941RJ	278
55546	84	62263	196	70026LED	183	942RJ	279
55547	85	62264	196	70032LED	166	94019	125
62041	211	62265	196	70033LED	166	94531	124
62042	211	62311	30 199	70040LED	118	94932	131
62043	211	62312	30 199	70041LED	219	94941	130
62050	180	62313	30 199	70043LED	219	96121	126
62051	213	62314	30 199	70044LED	219	96918	127
62052	213	62315	31 78	70045LED	219	96942	129
62053	213	62316	31 78	70048LED	90	96980	128
62054	180	62317	31 51	70049LED	90	969ST	266
62055	180	63004ET	41	70050LED	91	970GG	264
62060	180	63013ET	40	70052LED	91	97121	126
62061	209	63015ET	40	70053LED	54	977GG	279
62062	209	63021	41	70060LED	218	978ST	266
62063	209	63023ET	40	70061LED	218	980OPR	276
62084	173	63024ET	41	70062LED	218	G4LEDSMD1.5W	280
62088	186	63811-18	200	72977LED	132	G9-48W120V/ER	280
62089	184	63811-19	201	780LEDSTR	247	GX53LED13WLAMP	281
62091	35 208	63811-20	202	781LEDSTR	247	MR16LED-12V LAMP	280
62092	35 208	63811-41	203	782LEDSTR	247		
62093	35 208	63811-46	204	783LEDSTR	247		
62095	23 178	63811-47	205	784PWB	248		
62099	35 208	63813-18	200	785PWC	248		
62104	170	63813-19	201	786PWC	248		
62105	170	63813-20	202	787CON	249		
62106	175	63813-41	203	788BCON	249		
62215	176	63813-46	204	789SPC	248		
62216	176	63813-47	205	792CON	249		



## Fixture Finish Codes

ANCK	Antique Nickle		PBLU	Powder Blue	
ALU	Aluminum		PNK	Pink	
BL	Black		RED	Red	
BRZ	Bronze		RIC	Rice	
BS	Brushed Steel		RU	Rust	
BSL	Brushed Silver		SAT	Satin	
CH	Chrome		SC	Satin Chrome	
DBRZ	Distressed Bronze		SILV	Silver	
GWH	Glossy White		SS	Stainless Steel	
MC	Mat Chrome		WH	White	
ORB	Oil Rubbed Bronze				










## Glass Finish Codes






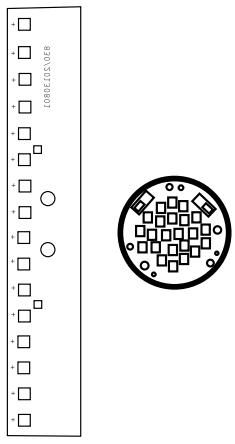


12C	12mm Clear Glass
8CL	8mm Clear Glass
ALB	Alabaster
AMB	Amber
AMFBF	Amber Firebird
AMS	Amber Slate
AMST	Amber Stone
APCL	Clear Acrylic Prismatic
ASKY	Amber Sky
ASM	Smoked Acrylic
AWH	White Acrylic
AYEL	Yellow Acrylic
BLC	Black and White
BLK	Black
BLKLN	Black Lined
BLU	Blue
BLULN	Blue Lined
BRS	Brown Slate
BRST	Brown Stone
BSC	Brushed Steel in Clear Glass
CCL	Clear Crystal

CFR	Clear Frosted
CKF	Checkered Frosted
CLAM	Clear Amber
CLF	Clear with Frosted Ring
CLM	Metal Mesh in Clear Glass
CLOP	Clear Opal
CLR	Clear
CLRD	Clear Red
COB	Cobalt
CRY	Crystal
FST	Frosted
GRO	Green Opaline
ICA	Inca
LGRFB	Light Green Firebird
MTL	Metal
MYA	Maya
OPL	Opal
ORO	Gold
PLC	Purple Cloud
PLM	Plum
PLMFB	Plum Firebird

PLS	Purple Swirl
RED	Red
REDLN	Red Lined
RFR	Ribbed Frosted
RRO	Red Ribbed Opaline
RUSKY	Red Sky
SAO	Silver Amber Opaline
SARO	Silver Amber Ribbed Opaline
SDS	Sand Slate
SMK	Smoke
TEX	Textured
WAMB	Wicker Amber
WHST	White Stone
WHT	White
WHTFB	White Firebird
WHTLN	White Lined
WRED	Wicker Red
WTP	White Tear Drop
WWHT	Wicker White

## Glossary of Lamp types used by fixtures in this catalog

	Lamp Wattage	Base Type	Lamp Type	Kelvin	Total Nom Lumens	Lumens Per Watt	Voltage
	18w	2G11	FT18DL	3000k	1200Lm	66.67Lm/w	120v
	24w	Bi-Pin	T-5 HO	3000k	1750Lm	72.92Lm/w	120v
	39w	Bi-Pin	T-5 HO	3000k	3100Lm	79.49Lm/w	120v
	60w	E-12	B-10	2700k	650Lm	10.84Lm/w	120v
	60w	E-26	A-19	2700k	800Lm	13.34Lm/w	120v
	75w	E-26	A-19	2700k	1100Lm	14.67Lm/w	120v
	100w	E-26	A-19	2700k	1600Lm	16Lm/w	120v
	40w	G10q	2CT6	2700k	2800Lm	70Lm/w	120v
	58w	G10q	2CT6	2700k	3700Lm	63.8Lm/w	120v
	22w+32w	G10q	T-9 4-Pin	3000k	3900Lm	72Lm/w	120v
	32w+40w	G10q	T-9 4-Pin	3000k	4600Lm	63.8Lm/w	120v
	13w	G24q-1	Quad	2700k	900Lm	69.24Lm/w	120v
	18w	G24q-2	Quad	2700k	1250Lm	69.45Lm/w	120v
	26w	G24q-3	Quad	2700k	1800Lm	65.77Lm/w	120v
	10w	G4	Bi-Pin HGN 12v	2900k	120Lm	12Lm/w	12v
	20w	G4	Bi-Pin HGN 12v	2900k	300Lm	15Lm/w	12v
	40w	G9	G9 Hgn	2900k	480Lm	12Lm/w	120v
	48w	G9	G9 Xenon	2900k	740Lm	15.41Lm/w	120v
	50w	G9	G9 Hgn	2900k	600Lm	12Lm/w	120v
	60w	G9	G9 Hgn	2900k	800Lm	13.34Lm/w	120v
	75w	G9	G9 Hgn	2900k	1050Lm	14Lm/w	120v
	35w	GU-10	MR-16	2900k	260Lm	7.43Lm/w	120v
	50w	GU-10	MR-16	2900k	440Lm	8.8Lm/w	120v
	50w	GU-10	PAR-36 ESD 111	2900k	280Lm	5.6Lm/w	120v

	13w	GU-24	Quad	2700k	900Lm	69.24Lm/w	120v
	18w	GU-24	Spiral	2700k	1250Lm	69.45Lm/w	120v
	26w	GU-24	Spiral	2700k	1710Lm	65.77Lm/w	120v
	20w	GU-4	MR-11	3000k	240Lm	12Lm/w	12v
	4w	GU-5.3	MR-16 LED	3000k	215Lm	53.75Lm/w	12v
	35w	GU-5.3	MR-16	2900k	360Lm	14.86Lm/w	12v
	50w	GU-5.3	MR-16	2900k	514Lm	16.5Lm/w	12v
	18w	GX-53	CCFL	2700k	800Lm	44.45Lm/w	120v
	13w	GX-53	LED	3000k	1200Lm	92.3Lm/w	120v
	35w	GY6.35	Bi-Pin	2900k	600Lm	17.15Lm/w	120v
	1w	Module	LED	4700k	65Lm	65Lm/w	120v
	3w	Module	LED	3500k	165Lm	55Lm/w	120v
	4w	Module	LED	3000k	370Lm	92.5Lm/w	120v
	7w	Module	LED	3000k	385Lm	55Lm/w	120v
	10.8w	Module	LED	3000k	1265Lm	117.13Lm/w	120v
	13w	Module	LED	3000k	1520Lm	116.93Lm/w	120v
	18w	Module	LED	3000k	1400Lm	77.78Lm/w	120v
	24w	Module	LED	3000k	2790Lm	116.25Lm/w	120v
	25w	Module	LED	3000k	3040Lm	121.6Lm/w	120v
	36w	Module	LED	3000k	4000Lm	111.12Lm/w	120v
	75w	R7s	J-78	2900k	1050Lm	14Lm/w	120v
	100w	R7s	J-78	2900k	1650Lm	16.5Lm/w	120v
	150w	R7s	J-78	2900k	2600Lm	17.34Lm/w	120v
	100w	R7s	J-118	2900k	1650Lm	16.5Lm/w	120v
	150w	R7s	J-118	2900k	2600Lm	17.34Lm/w	120v
	200w	R7s	J-118	2900k	3200Lm	16Lm/w	120v
	300w	R7s	J-118	2900k	5000Lm	16.66Lm/w	120v

**HEADQUARTERS:**

1200 Valencia Avenue  
Tustin, CA 92780 | USA

**TOLL-FREE:**

800-828-5483

**PHONE:**

714-247-1270

**FAX:**

714-247-1351

**E-MAIL:**

info@accesslighting.com

**DALLAS TRADEMART:**

2100 Stemmons Freeway | Suite 3939  
Dallas, TX 75207 | USA



www.accesslighting.com



**\$15.00**

Catalog 26 © 2013/14 All Rights Reserved

Catalog  
**26**